



Universal Car Notebook Charger, 90W



Manual DA-10191

Now, enjoy your trip with the world's smallest universal DC adapter with 90W power for notebooks and USB chargeable devices. Since its very small, so it can be easily and conveniently carried with great convenience and it can power your laptop and devices in cars. Moreover, this adapter also has an integrated 5 Volt USB charging port, which allowing you to charge accessory devices through USB port without any additional power adapters. With our ultra slim and smart power adapter, you'll find an ideal companion for your myriad pursuits in life.

Product Features


- Mini and intelligent design
- 100% automatic, no fiddly switch, just plug and go.
- Supplies power for Notebook, Netbook
- USB Charging port: iPhone®, iPad®, Smartphone, Tablet, PSP, MP4 and other related USB devices everywhere
- Portable and convenient, smart partner for travel
- Optional DC tips, compatible with different brands of laptop and netbooks.
- Multi protections: short circuit, over current, over voltage, over temperature protections.

Specification

Product: Mini Universal Laptop Car DC Adaptor

Model:	DA-10191
Input:	DC 11-15V 10A
Output:	DC 14.5V-24V 6A 90W (max)
USB output:	5V2.4A
Power:	90W max.
Size:	63.5 x 49 x 17 mm
N.W.:	55 g
High Efficiency:	96%

Product Diagram:

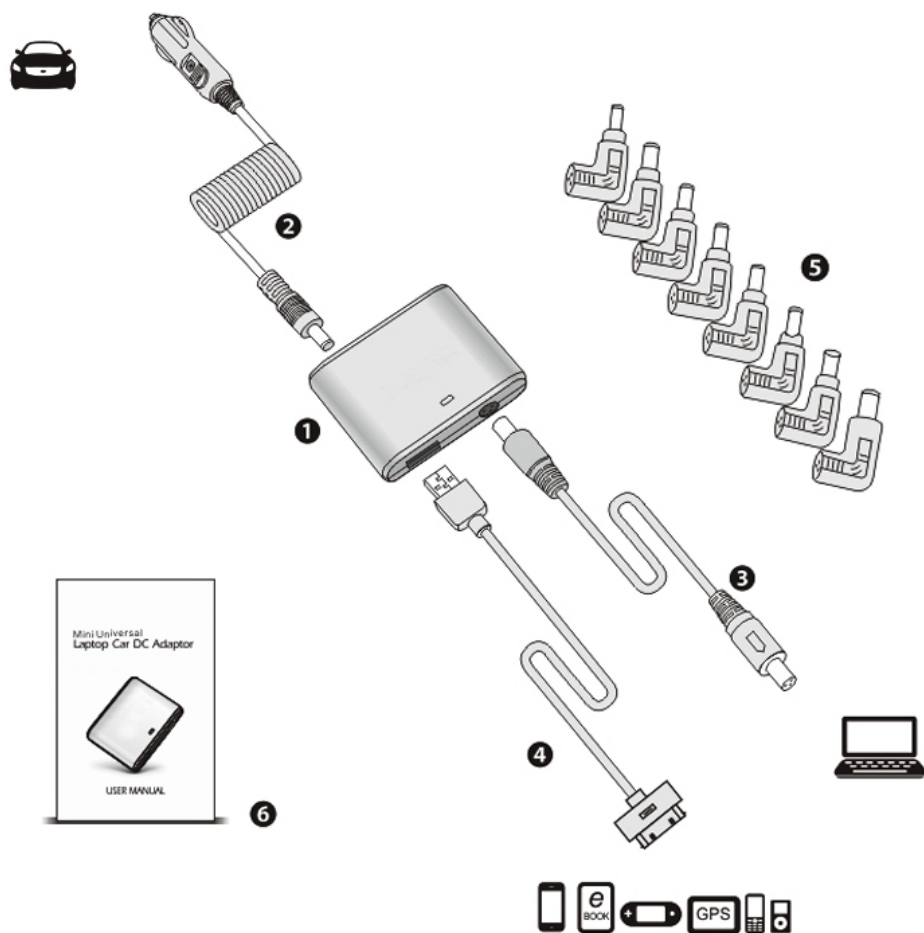


- ① DA-10191 Adapter Body
- ② Car charging cable
- ③ Laptop prolong DC cable
- ④ USB cable (not included)
- ⑤ Laptop DC tip (Optional)
- ⑥ User manual

Operation Instruction


Check the DC voltage of your notebook

Method one: you can check from the back of your notebook.

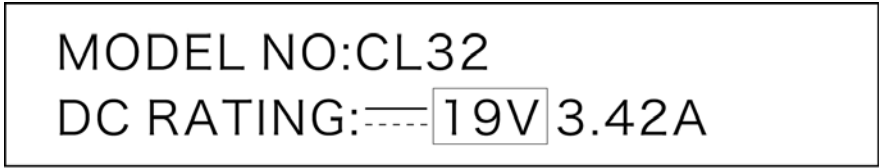


Voltage = 19 Volt

Method two: you can look at the label of your notebook adaptor.

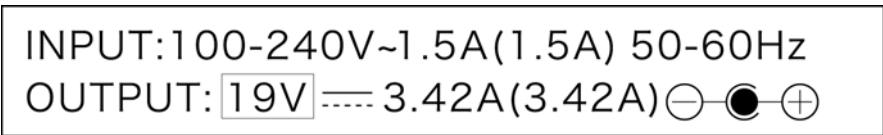

Voltage = 19 Volt


Choose the right laptop DC tip, for example like N04, you'll find output voltage 19V which is engraved on the tip. Connect it with prolong cable as below:

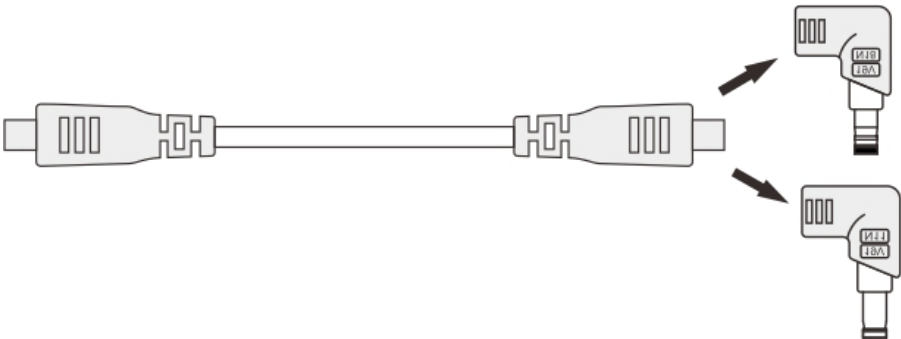


Caution: This adaptor supports voltage output ranging from 14.5-24 volts. Please be informed that using this adaptor to charge a notebook outside of the 14.5-24 volts range may damage the notebook.

Charge or supply power for laptops and mobile phones

Insert the car plug to the cigar lighter socket, and then connect the other end to the input port of our car adaptor. Select the right laptop DC tip or USB cable and connect it to the DC output or USB output of car adaptor, then it can charge or supply power for your laptops and mobile phones.

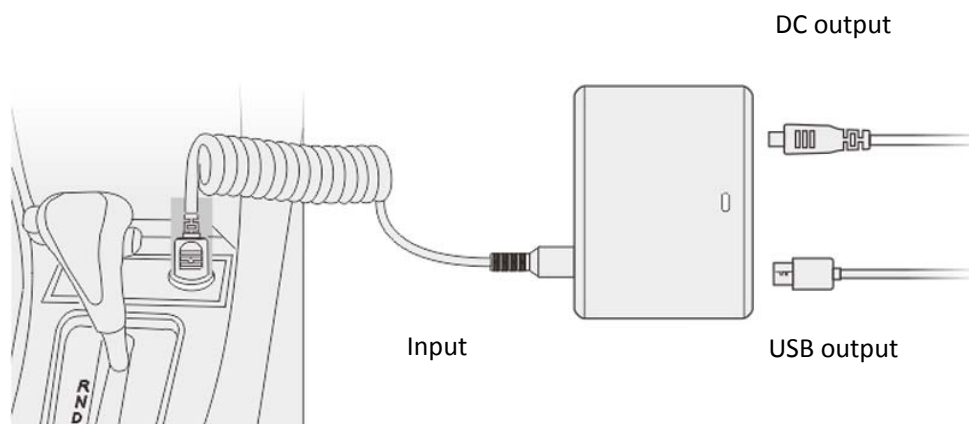

Cigar lighter socket

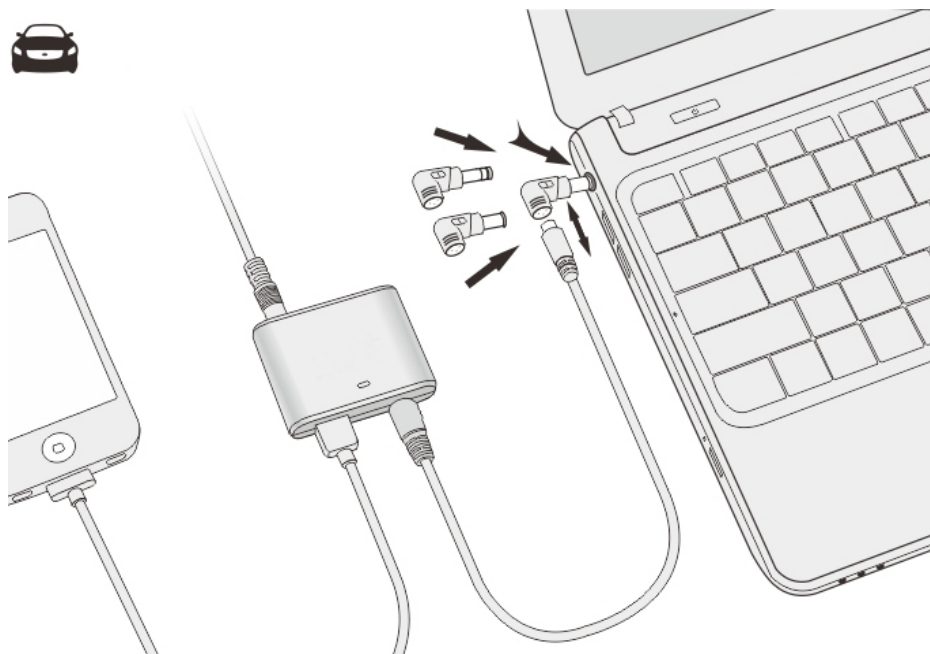

Laptop DC Tip Specification

No	Output Voltage	Range Voltage	Connectors Spec.	Replacement
N04	19V	18.1-19.9V	4.8*1.7*10.7mm	HP/COMPAQ: 18.5V/2.7A, 18.5V/3.5A, 18.5V/3.8A, 18.5V/4.9A; DELTA: 19V/2.64A; ASUS: 19V/2.64A; NEC: 19V/2.64A
N07	19V	18.1-19.9V	5.5*2.5*10.7mm	IBM: 19V/4.2A;DELL: 19V/3.16A, 19V/3.42A; COMPAQ/HP: 18.5V/4.9A, 19V/4.9A; DELTA: 19V/2.64A; TOSHIBA: 19V/3.16A, 19V/3.42A, 19V/4.74A; ASUS: 19V/4.74A LENOVO: 20V/2A; LITEON: 19V/3.16A, 19V/3.42A, 19V/3.95A, 19V/4.74A; NEC: 19V/2.64A, 19V/3.16A; GATEWAY: 19V/3.16A, 19V/3.42A, 19V/3.68A, 19V/4.74A
N09	19.5V	18.5-20.4V	6.0*4.3*10.7mm	SONY: 19.5V/2.7A, 19.5V/3A, 19.5V/4.1A, 19.5V/4.7A; FUJITSU: 19V/3.16A, 19V/3.69A, 19V/4.22A
N11	19V	18.1-19.9V	5.5*1.7*10.7mm	TOSHIBA: 19V/3.95A; ACER: 19V/3.42A; DELTA: 20V/3.5A
N18	19V	18.1-19.9V	5.5*2.1*10.7mm	ACER: 19V/3.16A, 19V/3.42A, 19V/4.74A; LITEON: 19V/3.16A, 19V/3.42A; NEC: 19V/3.16A
N19	19V	18.1-19.9V	5.5*3.0*10.7mm	SAMSUNG: 19V/3.16A, 19V/3.75A, 19V/4.22A, 19V/4.74A
N22	19.5V	18.5-20.4V	7.4*5.0*12.5mm	DELL: 19.5V/3.34A, 19.5V4.62A
N23	18.5V	17.6-19.4V	7.4*5.0*12.5mm	HP/COMPAQ: 18.5V/3.5A, 18.5V4.9A etc.
N24	20V	19-21V	7.9*5.5*0.9mm	IBM/LENOVO: 20V/4.5A, 20V/3.25A etc.
N35	20V	19-21V	11*5.6*11mm square tip	Lenovo: 20V2.25A, 20V3.25A, 20V4.5A
N36	19.5V	18.5-20.4V	4.5*3.0 with pin	HP:19.5V2.31A, 19.5V3.33A, 19.5V4.62A

Notes:

1. All listing of brand names are registered trademarks of their respective companies.

Important Safety Information

The user manual is to help you use the power adapter safely, to ensure your personal safety, and to reduce the risk of fire, electric shock, or injury.

- Read all instructions in this user manual carefully before using the adapter.
- Do not open the device. There are no serviceable parts inside. Please always follow all the warnings and instructions closely.
- Your adapter should be used with cables and tips approved by Assmann Electronic GmbH only. Using your adapter with non-approved cables and tips may result in serious or fatal injury, and/or property damage.
- Do not operate the adapter near a heat source, a heat vent or under direct sunlight. Your adapter should be used in temperatures between 0°C-35°C (32°F-95°F).
- Do not ever cover the adapter with papers or other materials that reduce the cooling.
- To prevent injury and/or property damage, disconnect the input power cable from the adapter when it is not used. Please do not leave the adapter unattended while using it.
- The adapter may become hot during normal operation. Please handle the adapter with caution during or immediately after operation.
- Do not use your device in a wet environment. For example, near bath tubs, sinks, swimming pools, or in wet basements.
- Use the adapter only in automotive vehicles with 12Volt.
- Before cleaning the device, disconnect the device from the electrical outlet. Clean the device with dampened soft cloth. Do not use liquid or aerosol cleaners, which may contain flammable substances.
- Do not attempt to repair, modify, or tamper with the external or internal components of the adapter. Doing so will void the warrant and may lead to serious or fatal injury and/or property damage.

Hereby ASSMANN Electronic GmbH, declares that this device is in compliance with the requirements of Directive 2014/30/EU (EMC), Directive 2014/35/EU (LVD) and the Directive 2011/65/EU for RoHS compliance. The complete declaration of conformity can be requested by post under the below mentioned manufacturer address.

Warning:

This device is a class B product. This equipment may cause some radio interference in living environment. In this case, the user can be requested to undertake appropriate measures to prevent interference.

www.assmann.com

Assmann Electronic GmbH

Auf dem Schüffel 3

58513 Lüdenscheid

Germany

