



Power Bank 8000 with Wireless Charging Function



Quick Installation Guide
31884

Thank you for using this product of our company. Before using this product please read the manual carefully, so that you can correctly use it.

1 General information


This product is a well-designed portable aggregation battery with high capacity transmitting terminal of wireless charging & power bank (8.000 mAh) which applies to household, outdoor, traveling, office and other places. It offers you a chance to discover wireless charging at any time and place and provides perfect charging service for your smartphone, tablet, digital camera, MP4/MP5 player and other electronic devices.

2 Function Overview

1. Power Bank (8000 mAh)
2. Wireless Charging Station
3. Re-chargeable battery included
4. Intellective charging

3 Introduction of button, USB ports and indicator lights

- input of Micro 5Pin (DC 5V 1500mA)
- Output of USB1: 5V / 1 A
- Output of USB2: 5V / 2.1 A
- Indicator lights
- Power switch
- Center area of wireless charging

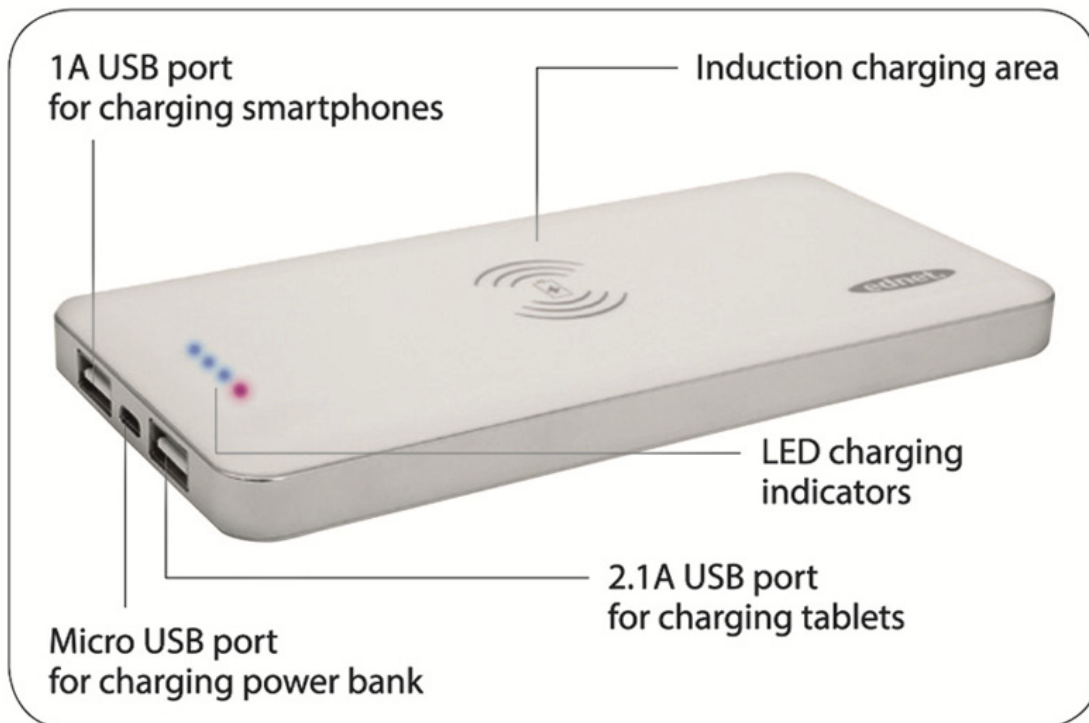

4 Important notes

1. **Attention:** The induction charging function can only be used with compatible devices. Maybe additional hardware/accessories are required for using the function. For detailed information about the compatibility of your device, please check/contact the respective device manufacturer.
2. Please do not dismount and remodel
3. Pay attention, not water-proof, not moisture-proof, protect against falling.
4. Please do not charge in hot environment
5. Please use suitable adapter to connect with the transmitting terminal
6. Please do not strike it or throw if into fire and water
7. Please stop to use it immediately if battery is bulge, leaking or smelling
8. This product should be charged for once every month at least when you don't use it for a long period
9. Please run out of battery and then recharge in order to lengthen battery's life
10. Please long press the power switch three seconds to turn off power when you do not use wireless charge
11. Please remove the protective layer before recharging
12. Please more attention, do not charge with wireless charging for mobile phone when recharge this device.

5 Operation

1 Turn on/off

Press the power switch to turn on the machine. Then the blue light is on
Long press the power switch three second to turn on/turn off wireless charging function. Then the red light is on/off.

2 Charging Power Bank

One end of charging cable must be inserted in the Micro USB 5-pin jack, another end with a power adapter must be inserted in a AC main socket, blue LED light is twinkling under charging and all blue LED lights are on after fully charged.

3 Charging mobile devices

3.1 Wired charging

Turn on the power switch, blue indicator lights are on. One end of charging cable must be inserted in the USB jack, and the other end must be inserted in the charging port of your device which needs to be charged. The blue LED light is twinkling.

3.2 Wireless charging

Turn on the wireless charging power switch red indicator light is on. Put your smartphone on top of the power bank, exactly in the center of the wireless charging area and the blue LED light is twinkling.

6 FAQs

1. Turn on the power switch, if only one blue LED light is twinkling, battery is running out soon, please recharge.
2. This product can automatically identify equipment that need to charge, if there is no equipment on it, the machine will be power off after 5 minutes
3. If the center point of the receiving terminal is deflected over 20mm from the center point of transmitting terminal, the machine power will be stops automatically.
4. If the transmitting terminal detects the current of load is over, it will disconnect connection automatically. The transmitting and receiving terminal will be kept standby status automatically. Reset receiving terminal and then restart.
5. If the current of load with wire and wireless charging is over, the transmitting terminal will disconnect connection automatically. You must remove some receivers, so that the current of load reach rated current.
6. The battery will not be charged fully and machine will be damaged if you use mismatched adapters.

7 Package Content

- | | |
|---------------------------|-------|
| 1. Power Bank (8.000 mAh) | 1 pcs |
| 2. USB cable | 1 pcs |
| 3. Manual | 1 pcs |

8 Specification

- | | |
|------------------------|---|
| 1. Input: | 4.8~5.2V 1500mA |
| 2. Output: | DC 5V - 1A or 2.1A |
| 3. Dimension: | Packaging (L 165mm*W100mm*H65mm)
Product (L153mm*W73mm*H12.5mm) |
| 4. Weight: | 310 g |
| 5. Display capacity: | Display electricity capacity with four blue LED,
when wireless charging red light is on. |
| 6. Charging type: | charging with wire and wireless in the same time |
| 7. Charging frequency: | 100~200KHZ |
| 8. Wireless distance: | 10mm |
| 9. Efficiency: | more than 70% |
| 10. Power: | 5W |

Hereby ASSMANN Electronic GmbH, declares that this device is in compliance with the requirements of Directive 2014/30/EU and the Directive 2011/65/EU for RoHS compliance. The complete declaration of conformity can be requested by post under the below mentioned manufacturer address.

Warning:

This device is a class B product. This equipment may cause some radio interference in living environment. In this case, the user can be requested to undertake appropriate measures to prevent interference.

www.assmann.com

Assmann Electronic GmbH
Auf dem Schüffel 3
58513 Lüdenscheid
Germany

