



USB Charger 1x USB-A 1x USB-C



Quick Installation Guide
DA-10062

DEAR CUSTOMER

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or using this product. Please keep this manual for future reference.

1. INTRODUCTION

The Dual Port Charging Adapter from DIGITUS® is suitable for USB devices such as smartphones or tablets and provides an output of 30W via the USB-C port or 18W via the USB-A port. 2 USB devices can be charged with 15W each at the same time. The integrated short circuit, surge and excess current protection provides added security. Furthermore, the integrated excess heat protection prevents potential overloads and damages to the charger or connected devices.

2. FEATURES

1. The 2 powerful ports charge the simultaneously connected devices at high speed.
2. Compact charger for USB-C (PD) and USB-A (QC) devices such as smartphones or tablets.
3. Supports charging power of up to 30 W - compatible with Power Delivery (PD 3.0) and QC3.0.
4. Note: When both ports are connected, they share a power output of at most 15W (5V, 3A) and do not support any PD and QC fast charging.
5. Fast charge for all smartphones: Supports the most important fast charging protocols, including PD3.0, QC 3.0, and PPS.

6. Integrated surge protection / excess current protection / short circuit protection.
7. Integrated overheating protection with auto-recovery for the highest degree of security.
8. Housing made of fire-resistant material

3. SPECIFICATIONS

Input/output	
Input	100-240V _{AC} 50/60Hz
Input Plug	EU plug
Output	<ul style="list-style-type: none"> • Type-C: 5V/3A, 9V/3A, 12V/2,5A, 15V/2A, 20V1,5A • PPS:3,3V-9V/3A, 3.3V-11V/2,75A (30W Max) • USB-A:5V/3A, 9V/2A, 12V/1,5A (18W Max) • Type-C + USB-A: 5V/3A
Protection	
Over Current Protection	Yes
Over Voltage Protection	Yes
Over Load Protection	Yes
Short Circuit Protection	Yes
Over Temperature Protection	Yes
Performance	
Ripple And Noise	≤200mV
Efficiency	≥85%
Line Regulation	± 5%

Mechanical	
Color	White
Size	34 x 28 x 84mm
weight	61g
Environmental	
Operating Temperature	0~25°C
Storage Temperature	-20 ~ 85°C
Operating Humidity	20% ~ 90% RH
Storage Humidity	5% ~ 95%
Certification	CE, RoHS, FCC
Limited Warranty	1 Year

4. PACKAGE CONTENT

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton

- 1x USB Charger 1x USB-A / 1x USB-C
- 1x QIG (Quick Installation Guide)

5. OPEARTION


5.1 Operation Procedures

- Plug the DC connector of power adapter into a socket.
- Plug one USB connector of the cable into the interface of the charger and plug the other connector of the cable into the electronic device (Apple iPad, Google Chrome book, Apple iPhone, Samsung mobile phone, MP3, PC, etc.)
- Please pull the USB connector out after the electronic equipment's fully charged.

5.2 Operation Notes

- For optimum performance, please use the power adapter according to the user manual.
- Please plug the power adapter into socket whose voltage range should be 100~240VAC.
- Please unplug the power adapter after using.
- Note: Our products have protection functions and the two tips above are suggestions just for safety.
- Do not use the power adapter with an electronic product which is not in conformity with the specifications, so as to avoid any problems caused by specification mismatching.
- It's normal that power adapter will be a little overheated in the use process.
- When the power station stops working under over-current, over-temperature or short-circuit protection, please unplug the device after it automatically returns to work, then you need to check whether the device is compatible with this charger.
- Do not let the power adapter close to fire, such as stove, candles etc.
- Do not let the power adapter soak into liquid, such as swimming pool, bathtub, etc.
- Do not wash the power station with corrosive cleaner.
- If the power adapter cannot work properly, please contact the store or distributor in your area.

6. CONNECTION DIAGRAM

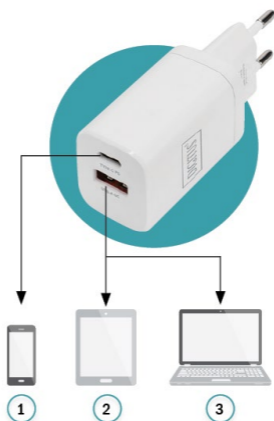

- 1) Smartphone
- 2) Tablet
- 3) Laptop

Hereby Assmann Electronic GmbH declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below mentioned manufacturer address.

www.assmann.com
ASSMANN Electronic GmbH
Auf dem Schüffel 3
58513 Lüdenscheid
Germany

