



USB Type-C™ Travel Dock, 6-Port



User Manual

DA-70879

1.0 INTRODUCTION

This is a USB-C to three USB 3.0, HDMI, Micro SD, SD/MMC, Type-C™ Data and PD Charging Adapter. The USB 3.0 port allows you to connect USB device or another hub to the host USB-C computer, the USB-C female port supports both PD Charging and data; the HDMI port allows you to connect an HDMI monitor so that you can watch videos on a big screen; and the Micro SD and SD/MMC port allows you to read information in the memory card on the host PC. It can work on all PCs and mobile phones which support DP Alt-mode.

2.0 FEATURES

- **Interface:**
 1. Type-C™ Male x1 (connect to Type-C™ host PC)
 2. Type-C™ Female x1 (for data and PD Charging)
 3. USB-A Female x2
 4. HDMI Female x1
 5. SD slot x1, Micro SD slot x1
- Support USB 3.0 super speed (5Gbps) transmission, downward compatible with USB 2.0
- One of the three USB-A port supports BC 1.2, the power of this port can be up to 7.5W (5V/1.5A)
- USB 3.0 port supports to charge and transmit data for the USB device simultaneously
- Support HDMI resolution up to 4Kx2K@30Hz

- Type-C™ female port supports both data (5Gbps) and PD Charging 100W (20V/5A)
- Multiple USB-C interfaces support plug and play, hot swap
- Support Secure Digital v3.0 UHS-I (Ultra High Speed): SDR12(12.5Mbyte/s)/SDR25(25Mbyte/s)/SDR50(50Mbyte/s)/DDR50(50Mbyte/s)/SDR104(104Mbyte/s)
- Support Fast Role Swap of PD 3.0, the connected device will not get disconnected while plugging in and out PD Adapter
- Easy to use and carry

3.0 PACKAGE CONTENTS

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- Main unit x1
- User Manual x1

4.0 SPECIFICATIONS

Input/Output Connector	
Input	USB-C Male x1
Output	USB 3.0 Female x2 USB-C Female x1 (for data and Charging) HDMI Female x1 Micro SDX1 SD/MMCX1
Environmental	
Operating Temperature	0°C to +45°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +70°C
Storage Humidity	5% to 90 % RH (no condensation)
Power Supply	
USB-C Female Port	Up to 100W (20V/5A)

Note:

1. Not all USB-C ports support all features of the USB Type-C™ standard. Make sure your notebook's USB-C port supports DisplayPort Alternate Mode (DP-Alt Modi) and USB Power Delivery (PD).
2. The video output capability depends on the graphic card of your notebook and the connected monitor.



5.0 OPERATION

1. Connect the USB-C male port of this product to USB-C device.
Connect the three USB 3.0 outputs of this product to three USB 3.0/2.0 devices
2. Connect HDMI output of this product to HDTV with one HDMI cable
3. Automatically or manually set IP address of computer
4. Insert Micro SD, SD/MMC card into the responding slots
5. Connect the USB-C charging port, it can charge for the host computer and support power for this product simultaneously.

6.0 CONNECTION DIAGRAM




1. Type-C™ Host PC

2. HDMI Display

3. Type-C™ Device

4. Type-C™ PD Adapter

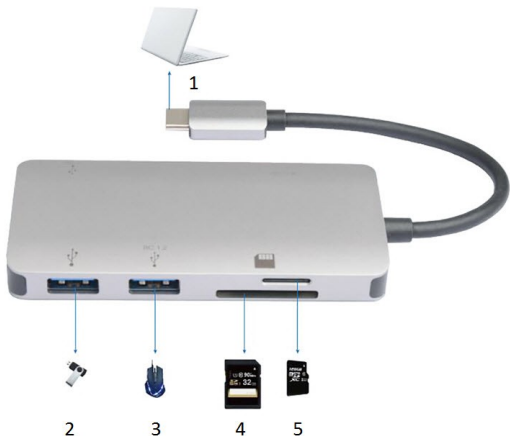

1. Type-C™ Host PC
2. USB Memory Stick
3. Mouse
4. SD Card
5. Micro SD Card

Hereby Assmann Electronic GmbH, declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below mentioned manufacturer address.

www.assmann.com

Assmann Electronic GmbH
Auf dem Schüffel 3
58513 Lüdenscheid, Germany

