


DIGITUS® Professional Indoor/Outdoor A/I-DQ (ZN) BH 50/125µ OM4 Multi Tube Installation Cable

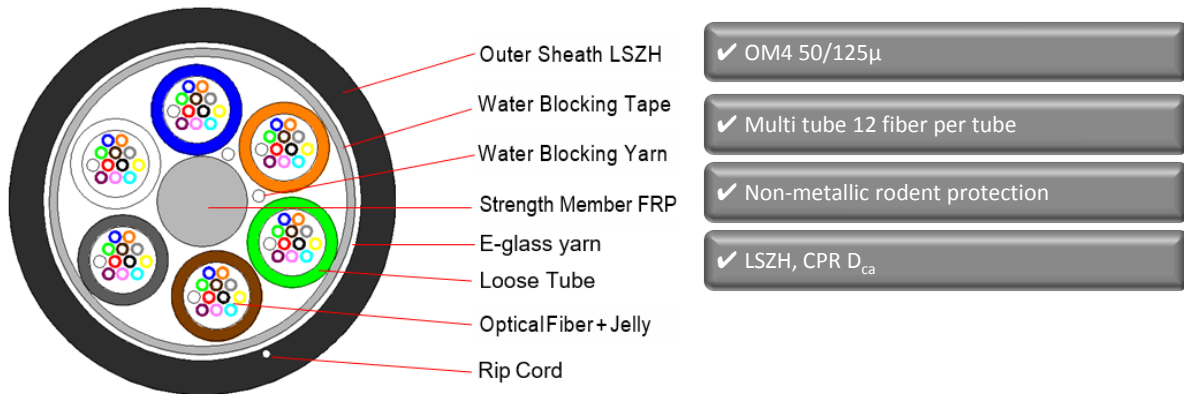

Indoor/Outdoor A/I-DQ (ZN) BH 50/125µ OM4 Installation Cable, CPR Dca, LSZH

Application area Primary (Campus), Secondary (Riser), Tertiary (Horizontally)
IEEE 802.3: 10Base-T – 100GBase-T
IEEE 802.5: 16 MB; ISDN; FDDI; ATM

Norms EN 60793; EN 60794-1; EN 50173-1; ISO/IEC 11801 3rd Edition

Fiber information

- MM50/125 fiber use special spun device successfully controlled the value of PMD, and make sure that it keeps stable in cabling.
- Approved by optical communication products ministry of quality supervision and
- Inspection center, the connection between OFS fiber in and outside is good .The single-end connect-loss won't be over 0.1 dB and the double-end connect-loss is all little than 0.05dB.
- Apply to non-relay communication network. Features: proof test >1%.

Optical properties

Core diameter	50±2.5 µm
Cladding Diameter	124.8±1.0 µm
Core Non-Circularity	≤5.0%
Cladding Non-Circularity	≤1.0%
Core-Cladding Concentricity Error	≤1.0 µm
Coating Diameter	245±7 µm
Coating Non-Circularity	≤6.0%
Cladding-Coating Concentricity Error	≤12.0 µm
OFL Bandwidth	850nm @ ≥3500 MHz·km 1300nm @ ≥500 MHz·km
Effective Modal Bandwidth	850nm @ ≥4700 MHz·km 1300nm @ ≥500 MHz·km
Attenuation Coefficient	850nm @ ≤2.3 dB/km 1300nm @ ≤0.6 dB/km

Mechanical properties

Faser count (OM4)	2-72 fibers
Max. no of loose tube	6 cores
Fiber count	12 fibers
Loose tube	2.3±0.2mm
Outer sheath material	LSZH, CPR D _{ca} , EN 50575:2014+A1:2016
Outer sheath Thickness	1.6 nominal
Cable OD	12.0±0.5 mm
Max. allowable pulling force	1500 N
Crush resistance	1000 N/100 mm
Cable Weight	300 kg±10%
Bending radius	20 x AD min. in installation; 10 x AD min. in operation
Standard Length	4±5% KMS
Transport and storage temperature	-40 °C bis +70 °C
Installation temperature	-40 °C bis +60 °C
Operation temperature	-40 °C bis +70 °C

Testanforderungen

Abschwächungskoeffizient	IEC 60793-1-40
Chromatische Dispersion	IEC 60793-1-42
Modenfelddurchmesser	IEC 60793-1-45
Manteldurchmesser	IEC 60793-1-20
Kernmantelrundlauffehler	IEC 60793-1-20
Grenzwellenlänge	IEC 60793-1-44

Fibers and Tube Color Code Scheme

Fiber color	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Violet	Pink	Aqua
Tube color	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Violet	Pink	Aqua

Product Number Information

DK-35242/4-U	Indoor/Outdoor A/I-DQ (ZN) BH 50/125µ OM4, 24 fibers, CPR Dca, LSZH-1
DK-35482/4-U	Indoor/Outdoor A/I-DQ (ZN) BH 50/125µ OM4, 48 fibers, CPR Dca, LSZH-1