

**DIGITUS**[®]**Professional**

DIGITUS[®] UPS uninterruptible power supply 1500VA 230V

DN-170015

EAN 4016032288787

High performance protection for your business and office computer systems against data loss and damage

**Output**

Output Power Capacity	850Watts / 1500 VA
Max Configurable Power	850Watts / 1500 VA
Nominal Output Voltage	230V
Output Connections	(1) Schuko Socket (2) Schuko EU Socket

Input

Nominal Input Voltage	230V
Input Frequency	50/60 Hz +/- 4 Hz (auto sensing)
Input Connections	Schuko plug
Cord Length	(1.2 meters)
Input voltage range for main Operations	180 - 270V
Input voltage adjustable range for mains operation	165 - 270V

**Batteries & Runtime**

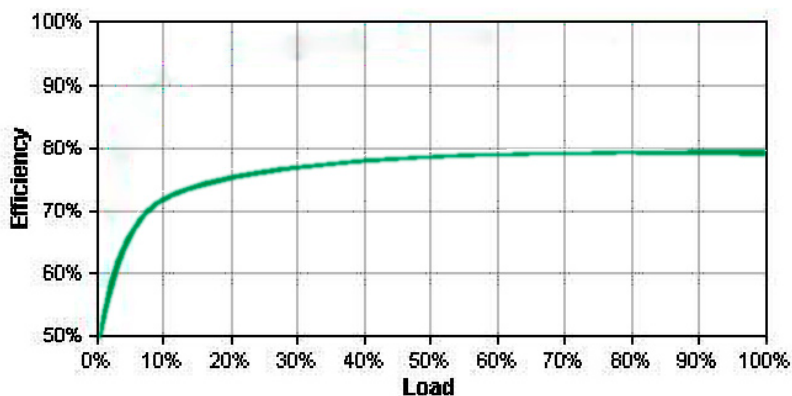
Battery Type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : Leakproof
Typical recharge time	8 hour(s)
Replacement Battery	9AH/12V
Battery Quantity	2
Battery Weight	2,45kg x 2

Communications & Management

Interface Port(s)	RJ11, RS-232, USB
Control panel	Colored LED display, when the UPS is on the city power, the green LED light; when The UPS is on the battery, the yellow LED light; when UPS is faults, the Red LED blink.
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm


Surge Protection and Filtering

Surge energy rating	300 Joules
Filtering	Full time multi-pole noise filtering : 5% IEEE surge let-through : zero clamping response time : meets UL 1449
Data Line Protection line)	RJ-11 telephone line /Fax protection (two wire single line)

Energy Use/Efficiency


Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Physical

Maximum Height	6.20 inches (157 mm)
Maximum Width	3.80 inches (95 mm)
Maximum Depth	13.2 inches (335 mm)
Net Weight	25.3 lbs. (11.5 kg)
Shipping Weight	26.4lbs. (12.0 kg)
Shipping Height	8.10 inches (205 mm)
Shipping Width	6.60 inches (168 mm)
Shipping Depth	14.80 inches (375 mm)
Color	Black

Environmental

Operating Environment	32 - 104 F (0 - 40 C)
Operating Relative Humidity	20% - 95%
Operating Elevation	0-10000 feet (0-3000 meters)
Storage Temperature	5 - 113 F (-15 - 45 C)
Storage Relative Humidity	020%- 95%
Storage Elevation	0-50000 feet (0-15000 meters)
Audible noise at 1 meter from surface of uni	40.00 dBA
Online Thermal Dissipation	24.00 BTU/hr

Conformance

Regulatory Approvals CE, EN60950-1:2006; EN-62301:2005; EN62040-3 , VDE EN62040-2:2006; EN 6100-4-2:1995 + A1:1998+A2:2001