



Charging station with 6 charging spots



Quick Installation Guide

DA-10083

1. Introduction

The USB Charging Station from DIGITUS® enables charging of up to 5 devices via cable and 1 device via Qi wireless charging. While the devices are charging, the charging station automatically detects the fastest charging rate for the connected devices to ensure optimal charging. 5 short cables are included with the charging station: 1x USB-A to USB-C, 1x USB-C to USB-C, 2x USB-A to iPhone (Lightning), 1x USB-A to Micro USB. The top side is made of silicone, which prevents the devices from slipping or falling off. The top side can be removed easily and conveniently washed if it gets dirty.

2. Features

1. No additional charging adapters are required and only one socket is occupied.
2. The charging station comes with 5 short charging cables, all tidy and organized.
3. 2 cables for Apple devices, 1 cable for Android devices, 2 cables for USB-C-capable devices.
4. Intelligent distribution of charging power depending on the connected devices.
5. Inductive charging technology for wireless charging of compatible smartphones.
6. Compatible with all Qi-capable smartphones as well as Qi-capable Air Pod®/Air Pod Pro®.
7. Intelligent and safe charging: Overcharging, excess voltage and short circuit protection.
8. The wireless charging surface can charge without a problem through protective covers up to 5mm thick. Metal accessories and credit cards can restrict the charging process.
9. If the phone cover is more than 6mm thick, it must be removed, otherwise the phone cannot be charged.

3. Package content

- 1x charging station
- 2x Connection cables USB-A to Apple Lightning
- 1x Connection cables USB-A to USB-C
- 1x Connection cable USB-C to USB-C
- 1x Connection cable USB-A to Micro USB
- 1x Connection cable with CEE-7/16 Euro plug (Type C)
- 1x QIG (Quick Installation Guide)



4. Specifications

1. Input voltage: 100-240 V.
2. Dimensions: L 225 x W 125 x H 74 mm.
3. Color: white / gray.
4. Weight: 544 g.
5. Power output: 1x USB-C: 5V/3A, 9V/2A, 12V /1.5A.
6. Power output: 1x USB A: 5V/2.4A.
7. Power output: 2x USB A: 5V/3.0A (1+2).
8. Power output: 3x USB A: 1x 5 V/2.4A, 1x 5 V 3A (1+2 / 3+4).
9. Power output: 4x USB A: 2x 5 V/3A (1+2 / 3+4).
10. Wireless port power output: 5W / 7.5W / 10W.
11. Excess current protection / short circuit protection.
12. Housing: Fire-resistant material.
13. Frequency band(s):110-205 kHz.
14. Maximum radio-frequency power transmitted -21.13 dBuA/m

5. Before You Start


5.1 Safety Instructions

- Keep the unit away from heat sources, direct sunlight, humidity, water or any other form of liquid
- Do not operate the unit if it has been wet or exposed to moisture to prevent electric shock, explosion, and/or injury to yourself or damage to the unit
- Do not use the unit with wet hands
- Keep the unit free from dust, lint and other small particles
- Do not use the unit for anything other than its intended use
- Keep the unit out of reach of children. This unit is not a toy

5.2 Care and Maintenance

- Read the following recommendations before using the device
- Do not use abrasive cleaning solvents to clean the device
- Do not expose the device to extremely high or low temperatures. Extreme temperatures may destroy the device or distort some of the plastic parts
- Do not drop the device. Drops and other hard shocks may damage the internal circuit
- Do not attempt to disassemble the device. There are no user-serviceable parts inside

6. Product Overview

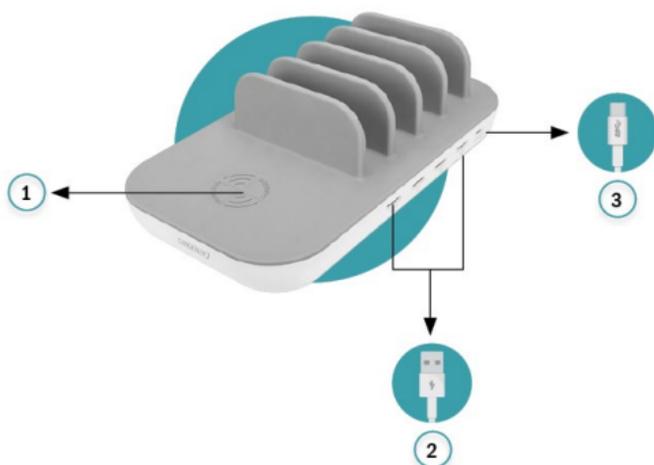

1. Qi Wireless Charging Pad
 - Wirelessly charges Qi-enabled devices.
 - Power output of 10W.
2. USB-A Ports
3. USB-C Port

7. Using the Charging Station

7.1 Getting Started

- Remove any packaging from the product, such as tape or protective film
- Check if everything is included in the box. Retain all packaging for future use

7.2 Wireless Charging

- The wireless charging pad is not detachable
- Place your Qi-enabled smartphone onto the charge pad to start wireless charging
- Take off your phone case for an optimal charging result. Please note that charging with a phone case, or other casings, may influence the charging speed
- It may also lead to overheating

- The built-in LED indicator light will flash 3 times once your device is on. The light will turn blue when wireless charging is underway

Please note that the temperature of your device will increase slightly when charging wirelessly with your device. Misalignment of the device on the charger can result in higher temperatures. Please avoid using devices aside from Qi-enabled devices to avoid overheating.

8. Operation Notes

- For optimum performance, please use the charging station according to the user manual
- Please plug the power plug into socket whose voltage range should be 100~240VAC
- Please unplug the power plug after using
- Note: Our products have protection functions and the two tips above are suggestions just for safety
- Do not use the charging station with an electronic product which is not in conformity with the specifications, so as to avoid any problems caused by specification mismatching
- It's normal that charging station will be a little overheated in the use process
- When the charging station stops working under over-current, over-temperature or short-circuit protection, please unplug the device after it automatically returns to work, then you need to check whether the device is compatible with this charging station
- Do not let the power charging close to fire, such as stove, candles and etc.
- Do not let the charging station soak into liquid, such as swimming pool, bathtub, etc.
- Do not wash the charging station with corrosive cleaner
- If the charging station cannot work properly, please contact the store or distributor in your area

Hereby Assmann Electronic GmbH, declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below mentioned manufacturer address.

www.assmann.com

Assmann Electronic GmbH

Auf dem Schüffel 3

58513 Lüdenscheid,

Germany

