



ON EAR BLUETOOTH HEADSET WITH DOCKING STATION



Quick Installation Guide
DA-12211


Contents

1. Product Overview	3
2. Basic Operation.....	4
3. Bluetooth Pairing and Connection	5
4. Connection with two devices	7
5. LED Indicator.....	8
6. Charging.....	8
7. Product Specification	10
8. Technical details and radio emission.....	10
9. Attentions and Q & A	11

Introduction

The on-ear headset from DIGITUS® offers optimal voice quality and faster connection thanks to Bluetooth 5.0. The headset can be connected with two devices simultaneously; for example, it can easily and quickly switch between two smartphones. The range is up to 10 m depending on the environment. The Bluetooth headset is compatible with iOS and Android smartphones and can be used for call times of up to 17 hours thanks to the rechargeable lithium ion battery. The headband can be adjusted flexibly to different head sizes and shapes, and the headset can be worn on the right or left side thanks to the rotatable microphone. The soft pad at the ear ensures excellent wearing comfort.

1. Product Overview

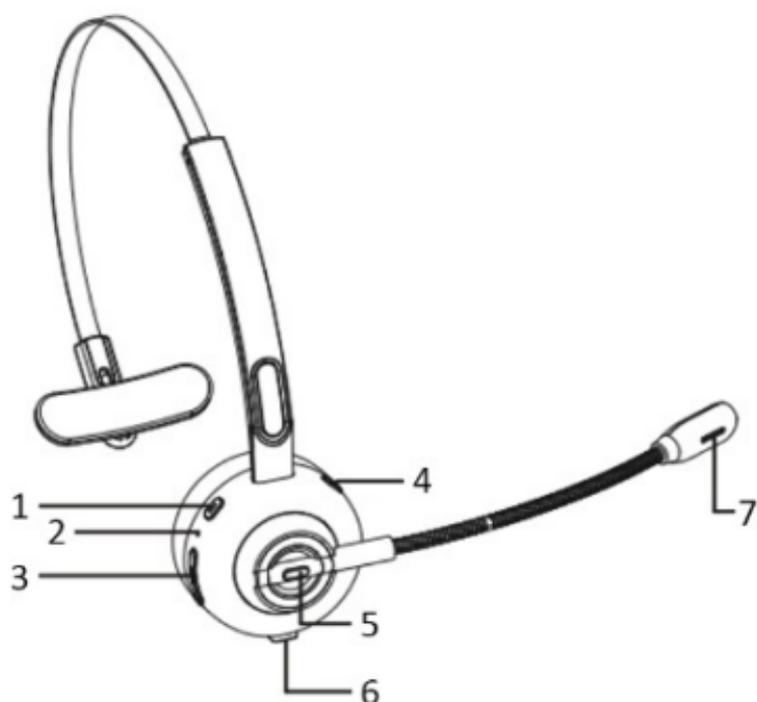

1. Volume -
2. LED Indicator
3. Micro USB
4. Volume +
5. MFB (Multi Function Button)
6. Charge Base Interface
7. Microphone

Package Contents

1. 1 x On-Ear Office Headset
2. 1 x Docking Station
3. 1 x Charging cable, USB A - Micro USB
4. 1 x QIG

2. Basic Operation

Button	Function	Operation
MFB	Power on	In off status, long press 1-3 seconds MFB to power on
	Power off	In on status, long press 5 seconds to power off
	Enter into Pairing Mode	In off status, long press 5-8 seconds to enter into pairing mode. Or under unconnected standby mode, double press the MFB to enter into pairing mode.
	Play/Pause	Short press when play music
	Redial a call	Double press MFB to dial the last call
	Reconnect	When there is a pairing record, power on and enter into reconnect state or short press MFB to reconnect under pairing mode
	Voice Dialing	Long press 1 second MFB then release

	Audio Switch	Long press 1 second MFB to switch the audio between phone and Bluetooth headset
	Answer a call	Short press (when call coming)
	Hang up a call	Short press (during a call)
	Reject a call	Long press 1 second (when call coming)
Volume +	Volume up	Short press
	Next song	Long press for 1 second
Volume -	Volume down	Short press
	Previous song	Long press for 1 second

3. Bluetooth Pairing and Connection

- A. In off status, long press 5-8 seconds to enter into pairing mode with LED Blue & Red flash alternately.
- B. Search and click to connect "DA-12211" on your phone Bluetooth lists, LED change to LED Blue flash after connected, now you can play music from phone to headphone.
- C. You can press MFB/ volume+ / volume- on the Bluetooth headset to control the answer/hang


up a call and play/pause of the music, next and previous songs, volume up and down.

Pairing



In off status, long press MFB 5-8 seconds to enter into pairing mode with LED Blue & Red alternately flash.


Connection

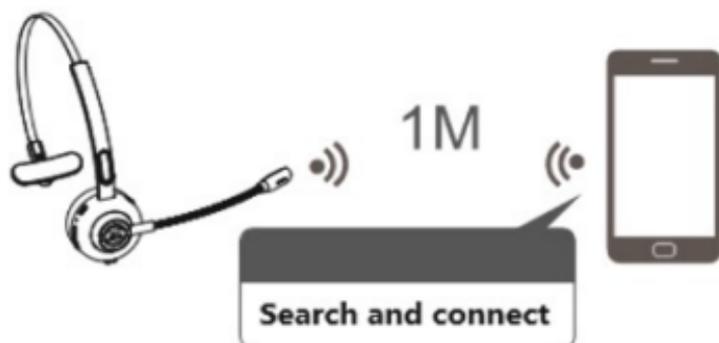

Search and click to connect "DA-12211" on your phone Bluetooth lists

4. Connection with two devices

- A. Follow part 3 to connect with first phone, then turn off the Bluetooth function of first phone.
- B. Double press MFB to pairing mode again with Red & Blue LED flash alternately.
- C. Search and click to connect "DA-12211" on your second phone Bluetooth lists, LED change to Blue LED low flash after connected.
- D. Turn on Bluetooth function of first phone, click to reconnect "DA-12211" on Bluetooth lists. Headset connected with two phones now.

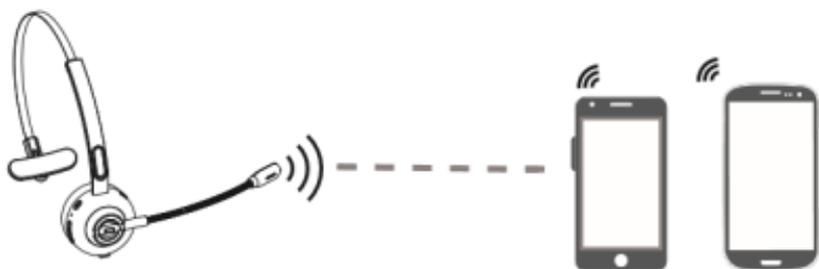

Notes:

Music only can be played from one phone under two connections, when you want to play music from another phone, you need to pause or close the music of the previous phone. The same operation during talking status.

5. LED Indicator


Mode	LED Indicator
Power on	LED Blue flashes 1 second
Power off	LED Red flashes 1 second
Pairing mode	LED Red & Blue flashes alternately
Unconnected standby mode	LED Blue flashes once every 2 seconds
Connected standby mode	LED Blue flashes once every 5 seconds
Play music	LED Blue flashes once every 5 seconds
Talking	LED Blue flashes once every 5 seconds
Delete paired record	Blue and Red LED flashes once at the same time
Charging	Solid LED Red
Full charged	Solid LED Blue
Low Battery	Red LED flash

6. Charging

Please charge the DA-12211 at once when the Red LED flash. Charging time about 2 hours. Solid LED Red change to Solid LED Blue when full charged.


Charge Connections

Please connect to the DA-12211 charging port through the Micro USB charging cable, the charger can be used as car charger, travel charger, computer USB, etc.

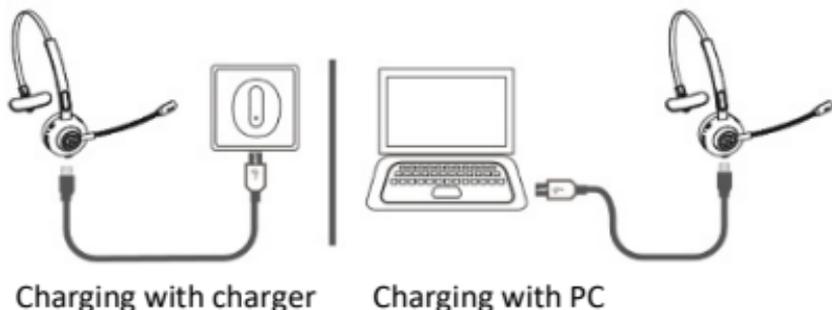

Use of charge Base

Please place the DA-12211 on the charging base, then connect the charging base to USB charger through the Micro USB port for charging.

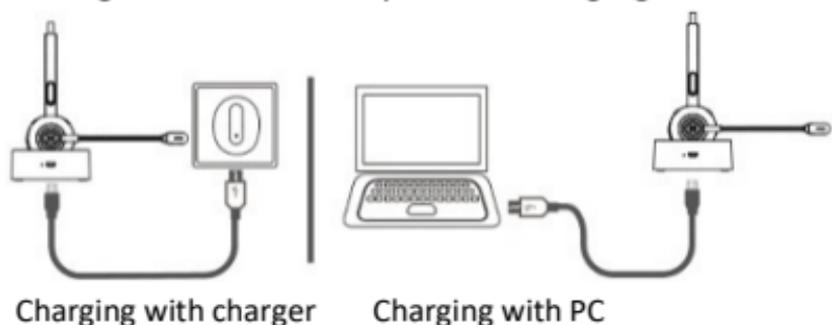

Notes:

Please charge the DA-12211 at least one time every 2 months when don't use it.

7. Product Specification

Bluetooth Version	Bluetooth V5.0
Bluetooth Chipset	CSR 8615
Operation Range	10M
Bluetooth Protocols	HSP, HFP, A2DP, AVRCP
CODEC Code	SBC
Battery Capacity	180maH/3.7V
Charging Time	2H
Stand-by Time	200H
Working Time	17H (50% Volume)
Headset Net Weight	51g
Charge Base Net Weight	242g
Headset Dimension	163.21 x 142.27 x 48.5 mm
Charge Base Dimension	79 x 73 x 31 mm

Notes:

Actual use time will differ from environment and music.

8. Technical details and radio emission

Hardware version	V008
Firmware version	V004
SRD Frequency	2402 - 2480 MHz
Modulation type	GFSK
RF power	4dBm

9. Attentions and Q & A

A. How to reconnect and operation when failed to reconnect?

When this product connected with your mobile phone successfully at the first time, it will search and reconnect the paired device automatically when power on, if failed, please pair and connect again.

B. How to Delete paired records?

In Power on state, long press the volume+ and the volume- button for 5 seconds to clear the pairing record. The indicator Blue and Red LED flashes once at the same time, that means the pairing record has been cleared, and the item will not connect back to the connected device. When there are various connection problems, try clearing the pairing record firstly.

C. What's the password for pairing?

Some connection devices require password for pairing, pls try 0000 or 8888 or 1111 or 1234.

D. What devices could charge for the headphone?

Any car charger, power bank, PC etc. which meet DC 5V, charging current more than 500mA could be charge for this item.

E. Three-way calling function operation

Call coming during call, short press the MFB to answer the new call and hang up the current call;

Call coming during the call, double press the MFB to answer the new call and keep the current call;

Call with a new call coming, long press the MFB for 1 second rejecting a new call.

When you are on a three-party call, double press the MFB to switch audio between the current call and the keep call.

Hereby Assmann Electronic GmbH, declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below mentioned manufacturer address.

www.assmann.com

Assmann Electronic GmbH
Auf dem Schüffel 3
58513 Lüdenscheid
Germany

