

# Universal Dual Desktop Monitor Mount



## **Quick Installation Guide**

DA-90353

















#### NOTE: Read the entire instruction manual before you start installation and assembly.




### **PARTS INCLUDED**

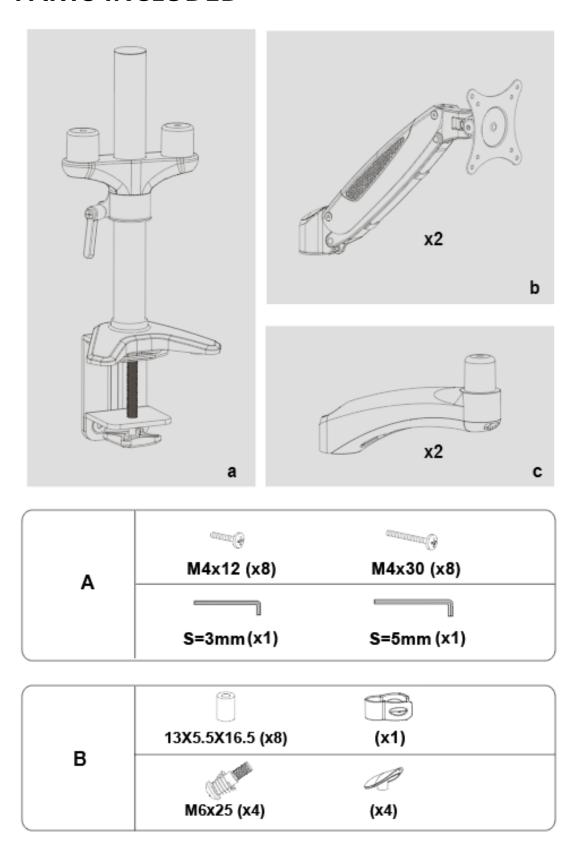

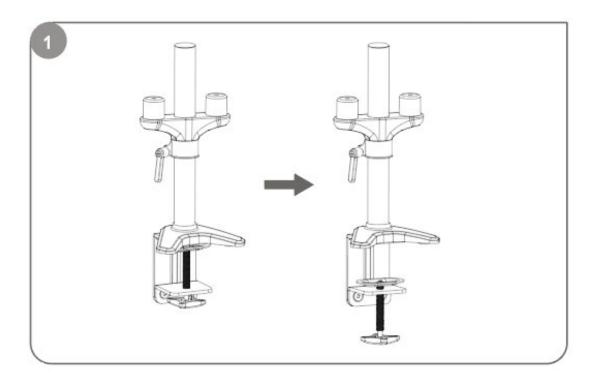


Loosen clamp screw until enough space is left for the edge of the desk.

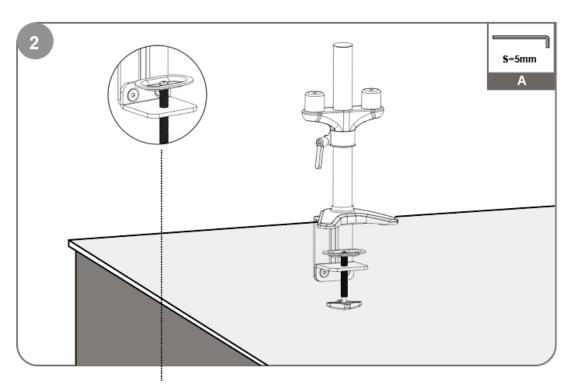


NOTE: If space is still not enough for clamp, remove clamp screw and attachment entirely and reattach clamp screw with attachment upside-down.

Tighten clamp using clamp screw until mount is securely fastened to desk.

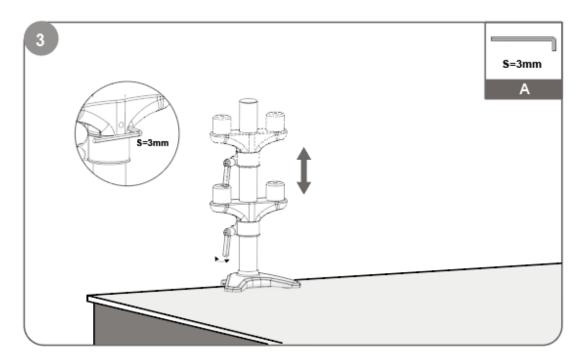


Adjust locating ring at proper height and screw up tight to hold the mount.

Adjust aluminum support part above the locating ring and use a hex key to fix it.

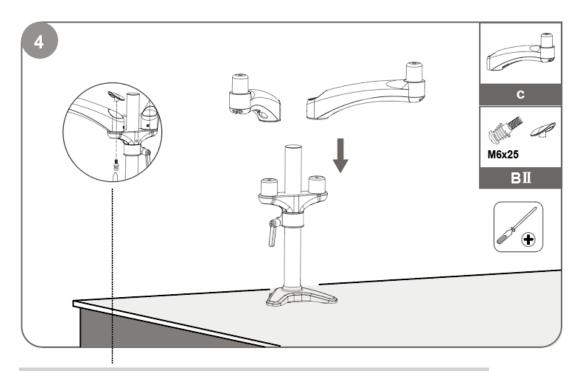


Insert the screw through the hole from supporting part to the decorative cap.


Insert extension arms to the supporting part.

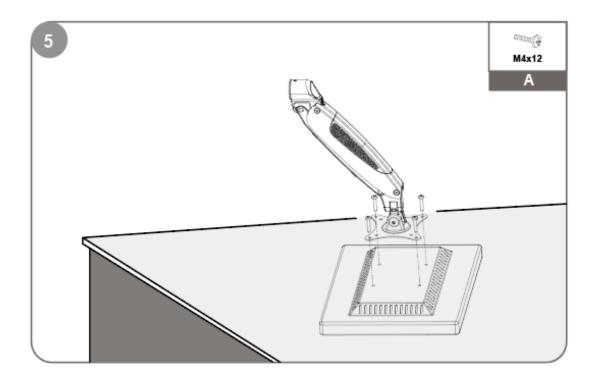

Flush surface installation: Install 4 screws through faceplate to monitor via mounting holes.

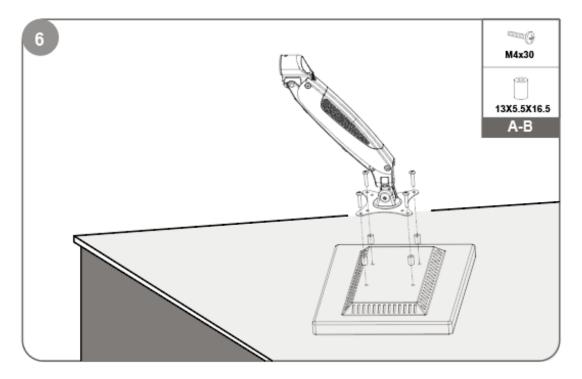


Recessed surface installation: Put 4 spacers between faceplate and monitor. Install 4 screws through faceplate, spacers to monitor via mounting holes.

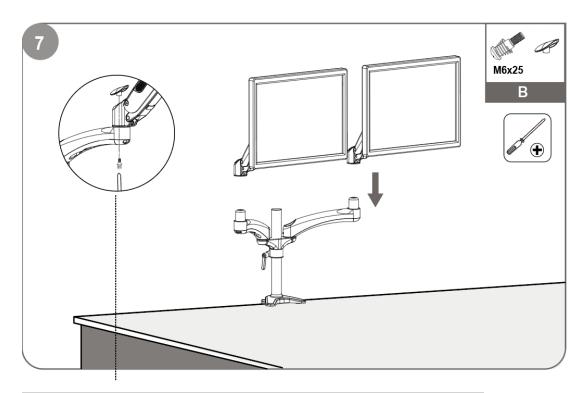


Insert the screw through the hole from extension arm to the decorative cap.

Lift the spring arm along with the monitor and put it on the extension arm.

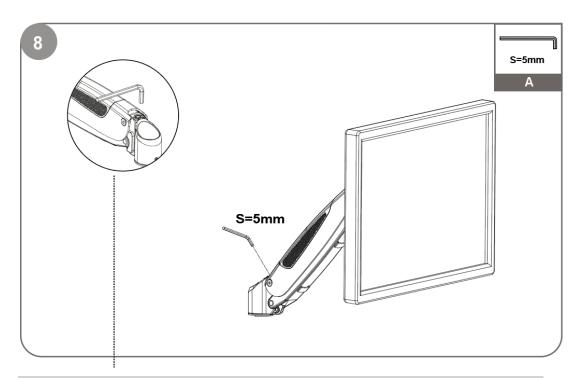


NOTE: Turn clockwise to reduce tension for lighter monitors and counter-clockwise to increase tension for heavier monitors.

Use a hex wrench to adjust the height tension of the gas spring arm, to keep different weight of monitors still at any position.

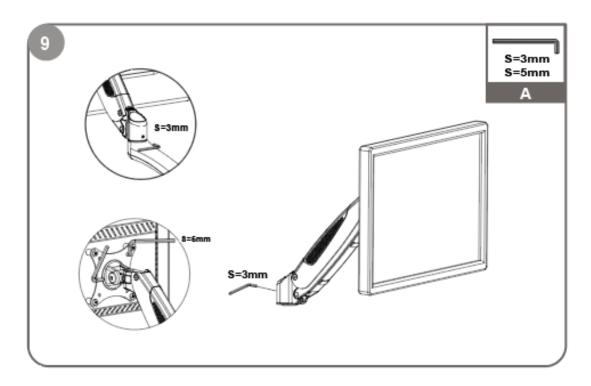


Use a hex wrench to adjust the damp for swiveling. Turn counter-clockwise to reduce damping and clockwise to increase damping.

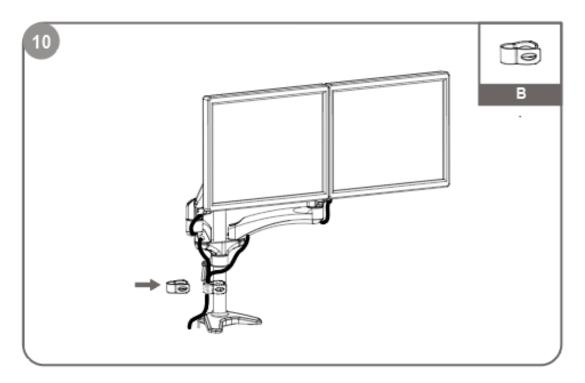

Insert cables into cable covers. Use cable clamp to limit cables close to steel pipe.

## **PRODUCT LINE GRAPH**

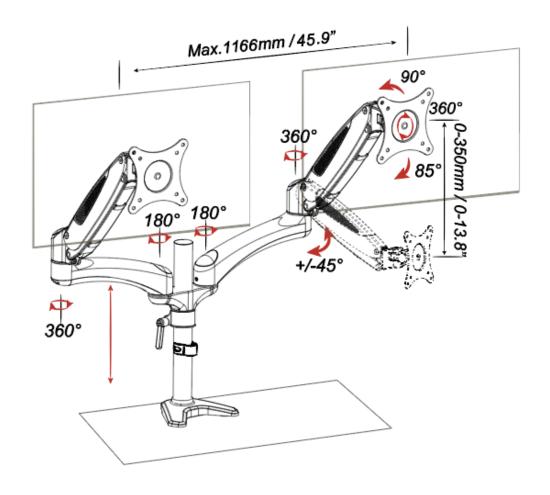

#### info@assmann.com

Assmann Electronic GmbH Auf dem Schüffel 3 58513 Lüdenscheid Germany

