

DIGITUS® CAT 6_A Keystone Module, unshielded



✓ Category: 6_A

✓ 500 MHz

✓ RJ45 jack

✓ compact design

Abstract

DIGITUS® CAT 6_A Keystone Module, unshielded, tool free connection

Features

- Cable entry: Rear side
- Housing: ABS halogen free, UL 94 V0
- Contacts: Phosphor, bronze
- IDC contacts: Phosphor, bronze
- Coating of contacts: Nickel, gold plated 0.5 μ
- 360° contacting of cable shield for improved EMV protection
- Layer: 50 μm gold over 40 μm nickel
- Operating temperature: -10 °C up to +60 °C
- Material circuit board: FR4, UL 94V-0, 1.45 mm
- Mating cycles: ≥ 750
- Diameter Cu-circuit (AWG 26...23): Flexible and massive
- Cable connection type: Tool free with cable hatch for strong/flexible conductions AWG 23-26
- Wiring standard: EIA/TIA 568 A/B
- Conformity: Category 6_A / 10GBase-T Channel, ANSI/EIA/TIA 568C.2.1:2002, ISO/IEC 11801:2002
- Dimensions: 20x14x34 mm
- Weight: ca. 9 g
- RJ45 outlet for mounting in Patch Panel
- Compact design allows the installations of 24 pieces in a row of 483 mm (19") 1U Panels
- Opening dimensions according to Keystone standard 19.35x14.8 mm
- Easy mounting in frame adapter sheets, mounting frames, panels and table housings due to short design

Product Overview

The Item "DN-93604" from DIGITUS® is an unshielded CAT 6_A Keystone Module with tool free connection, which provides best performance and link quality for your network.


The compact design allows an installation of 24 pieces in a row of 483 mm (19") 1U Panels.

It is conform to Category 6_A / 10GBase-T Channel, ANSI/EIA/TIA 568C.2.1:2002, ISO/IEC 11801:2002.

Product Images



Technical Drawings

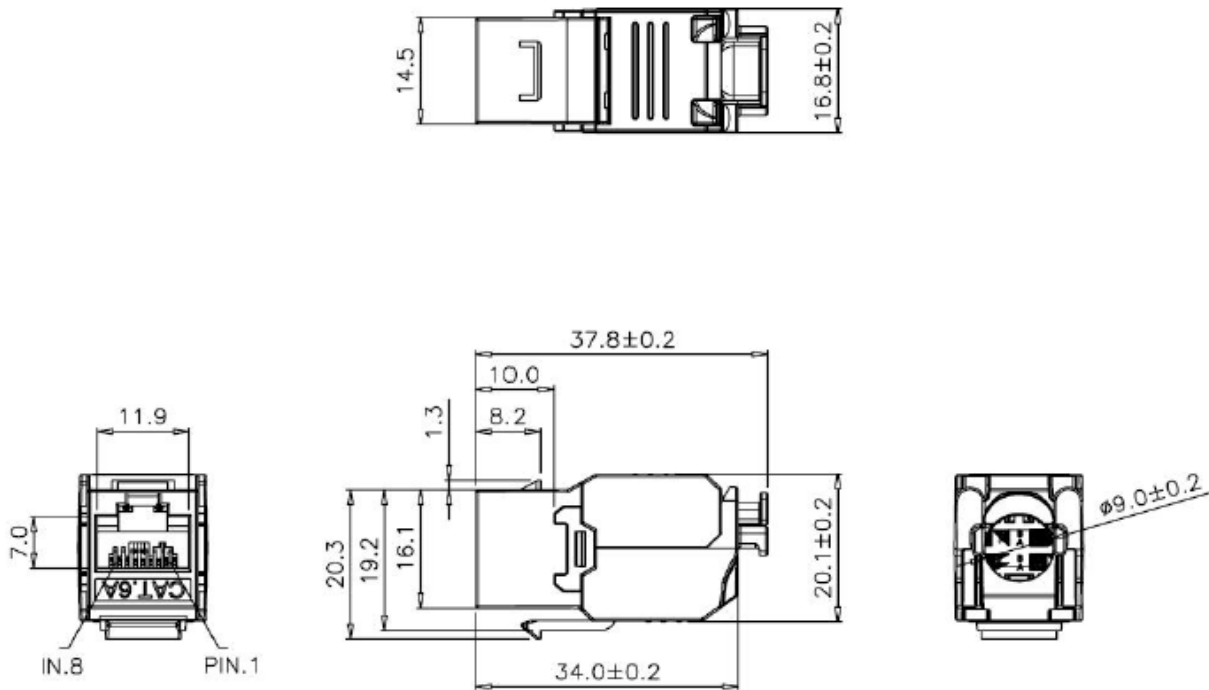

Product Number Information

DN-93604 DIGITUS® CAT 6_A Keystone Module, unshielded, Re-embedded, 500 MHz
acc. ISO/IEC 11801:2002, AM2:2009/09, tool free connection