




USB 2.0 4+1 PORT PCI EXPRESS CARD

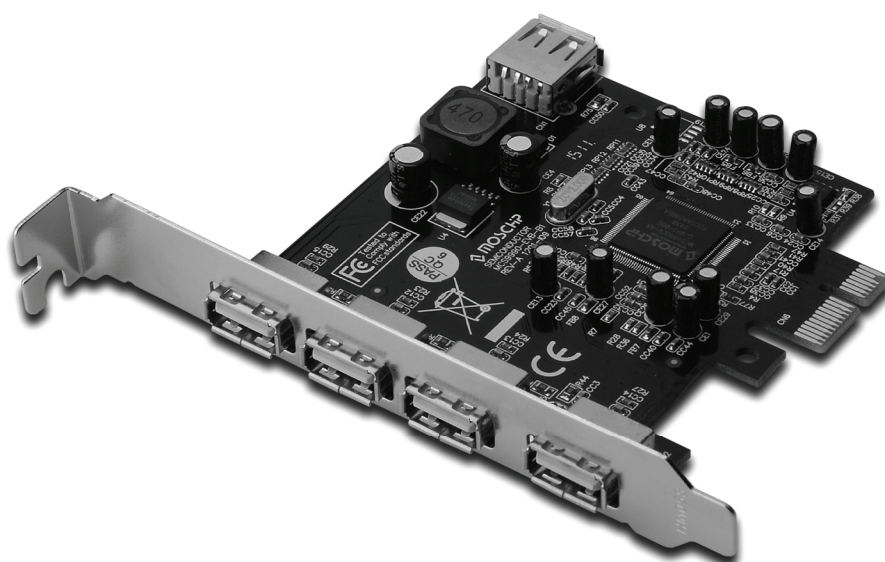

User Manual
DS-30202-1

Features and Benefits

1. Fully compliant with PCI Express Base Specification Revision 1.1
2. Single-lane (x1) PCI Express throughput rates up to 2.5 Gbps
3. Compliant with Universal Serial Bus specification revision 2.0
4. Provides independent four external and one internal USB 2.0 high speed ports (internal port is sharing with the 1st external port)
5. Supports simultaneous operation of multiple USB 2.0 and USB 1.1 devices
6. Supports the following speed data rates as follows:
Low-speed (1.5Mbps) / Full-speed (12Mbps) / High-speed (480Mbps)
Built-in 4-pin power connector for receiving extra power supply from system

System Requirements

1. Windows[®] XP/Vista/Win 7 (32/64 bit)
2. One available PCI Express slot

Package Contents

- 1 x USB2.0 4+1 Port PCI Express Card
- 1 x Driver CD
- 1 x User Manual

Hardware Installation

1. Turn off the power to your computer.
2. Unplug the power cord and remove your computer's cover.
3. Remove the slot bracket from an available PCIe slot.
4. To install the card, carefully align the card's bus connector with the selected PCIe slot on the motherboard. Push the board down firmly.
5. Replace the slot bracket's holding screw to secure the card.
6. Replace the computer cover and reconnect the power cord.

Driver Installation

For Windows XP (32-bit/64-bit)

Once the Windows XP startup, USB 2.0 PCI Express card will be installed automatically without driver installation.

For Windows Vista/7 (32-bit/64-bit)

Once the Windows Vista/7 startup, USB 2.0 PCI Express card will be installed automatically without driver installation.

The USB 2.0 PCI Express card will detect with four instances Standard EHCI USB Host controller & four standard OHCI USB host controller ports in Device Manager as shown below.

