






Copyright 2015 - Schneikel

RoHS Compliant

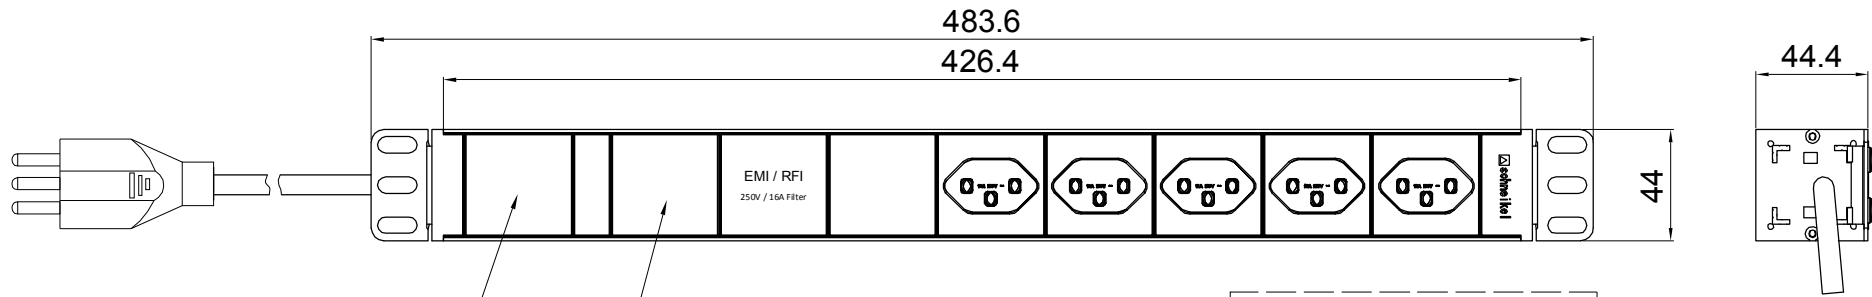

With Terminal Block inside

With Phönix Surge Inside

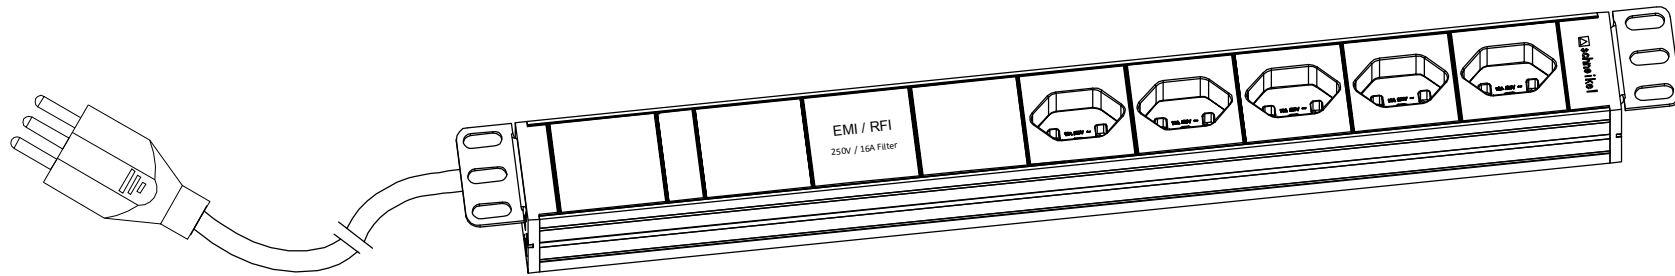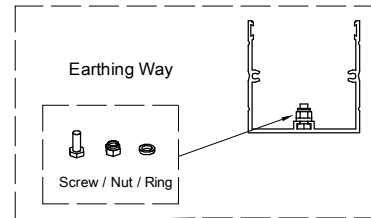

Basic Series (1) 16A Filter	OUTPUT (5) Black Sev type 23	OPERATING TEMPERATURE 0° to 60°C
INPUT 250VAC 16A 50HZ T23 plug 3M H05VV-F3G1.5mm lead black	BRANCH CIRCUITS (1) Phönix Surge	MOUNTING ACCESORIES (2) 42 Bracket

Revisions		
Rev	Description	Date

DRAWING TYPE (NO PERMISSION, NO CHANGING)		S-13 12 124-U-N	
unit=mm		Housing	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Silver Oxidation
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE 			
SCALE 1:3		DATE 16-12-2015	