



USB-C 3.2 Gen 1 to HDMI Graphic Adapter



Operating instructions

DA-70852 Rev. 3

Table of contents

| | | |
|----|--------------------------|---|
| 1. | Introduction | 3 |
| 2. | Specification | 3 |
| 3. | Characteristics | 4 |
| 4. | Package contents | 4 |
| 5. | Connection diagram | 5 |

1. Introduction

The DIGITUS USB-C 3.2 Gen 1 to HDMI Graphic Adapter adapter offers a first-class 4K/60Hz UHD resolution and is backwards compatible. Thanks to the Plug & Play function, no additional software is required to effortlessly connect USB-C devices to monitors, TVs or projectors. It supports dual display - So you can either expand or duplicate your display.

2. Specification

| | |
|--------------------------------|---|
| Connections | 1x USB-C (3.2 Gen 1) input - Host connection |
| | 1x HDMI - Max. Resolution: 4K/60Hz |
| Dimensions | 4.5 x 4.5 x 1.5 cm |
| Weight | 32 g |
| Product color | Black |
| Cable color | Black |
| Cable length | 15 cm |
| Housing | Plastic |
| Operating voltage | 5V |
| Power consumption | Max. 900 mA |
| Operating system compatibility | From Windows 7, from macOS 10.8, iOS (from iPhone 15), iPadOS, ChromeOS, Android, Linux |
| Operating temperature | 0°C to 40°C |
| Chipset | CS5265 |


3. Features

- USB upstream connection, supports data speeds of 5 Gbit/s & 480 Mbit/s
- Video output with up to 4K/60 Hz in USB-C 3.2 Gen 1- Backwards compatible (video output 1920 x 1080p in USB 2.0 application)
- The graphics adapter is fully compatible with the latest version of the operating systems listed
- Supports USB plug-and-play

4. Package contents

- 1x USB-C 3.2 Gen 1 to HDMI Graphic Adapter
- 1x QIG

5. Connection diagram

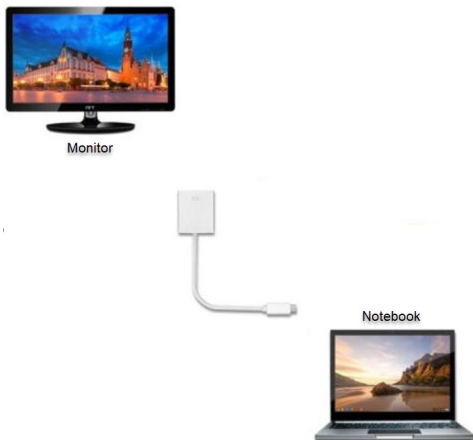

Assmann Electronic GmbH hereby declares that the printed declaration of conformity is enclosed with the product. If the declaration of conformity is missing, it can be requested by post from the manufacturer's address given below.

info@assmann.com

Assmann Electronic GmbH
Auf dem Schüffel 3
58513 Lüdenscheid
Germany

