



# USB-C™ MOBILE DOCKING STATION, 4 PORT



**Manual**

DA-70883



**Connection to mobile device:**

1x USB-C™ (male)

**Outputs:**

1x HDMI® (female) – maximum resolution up to 4K/30Hz

1x USB-A 3.0 (female) – up to 5Gbps data transmission

1x USB-C™ (female) for charging with 20V/5A (100W) or data transmission with up to 480Mbps


1x 3.5 mm Audio (female)

<b>Input/Output Connector</b>	
<b>Input</b>	1x USB-C™
<b>Outputs</b>	1x HDMI®, 1x USB 3.0 A, 1x USB-C™, 1x 3,5 mm Audio
<b>Resolution</b>	3840 x 2160p / 30Hz
<b>Physical</b>	
<b>Weight</b>	20 g
<b>Size (LxWxH)</b>	63 x 30 x 7.6 mm
<b>Environmental</b>	
<b>Operating Temperature</b>	0 °C to +45 °C
<b>Operating Humidity</b>	10 % to 85 % RH (no condensation)
<b>Storage Temperature</b>	-10 °C to +70 °C
<b>Storage Humidity</b>	5 % to 90 % RH (no condensation)
<b>Power Supply</b>	via USB-C™ (female)

### **Package content:**

- 1x Main unit
- 1x User Manual

## Example for application:

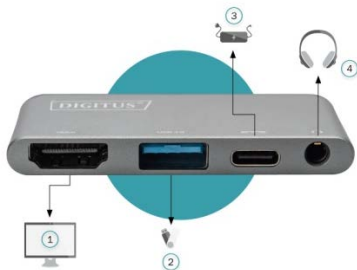

1. Monitor
2. USB Device
3. Power Adapter
4. Headphones

Hereby Assmann Electronic GmbH declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below mentioned manufacturer address.

**www.assmann.com**  
Assmann Electronic GmbH  
Auf dem Schüffel 3  
58513 Lüdenscheid  
Germany

