



USB-C™ MOBILE, 4 PORT



Manual

DA-70893

Connections



Outputs:

- (1) 1x 3.5 mm Audio (female)
- (2) 1x USB-A 3.0 (female) – up to 5Gbps data transmission
- (3) 1x USB-C™ (female) for charging with 20V/5A (100W) or data transmission with up to 480Mbps
- (4) 1x HDMI (female) – maximum resolution up to 4K/30Hz

Connection to mobile device:


- (5) Magnetic fixing panel
(for better fixing on mobile devices like tablets)
- (6) 1x USB-C™ (male)

Input/Output Connector	
Input	1x USB-C™
Outputs	1x HDMI, 1x USB 3.0 A, 1x USB-C™, 1x 3.5 mm Audio
Resolution	3840 x 2160p / 30Hz 1920 x 1080p / 60Hz
Physical	
Weight	24.5g
Size (LxWxH)	7.4 x 2.6 x 0.9 cm
Environmental	
Operating Temperature	0 °C to +40 °C
Operating Humidity	20 % to 80 % RH (no condensation)
Storage Temperature	-10 °C to +70 °C
Storage Humidity	5 % to 90 % RH (no condensation)
Power Supply	via USB-C™ (female)

Package content:

- 1x Main unit
- 1x User Manual

Example for application:

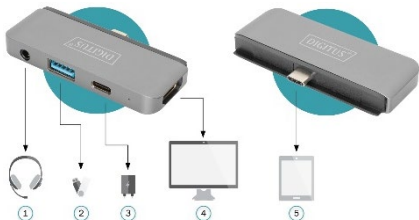

1. Headphones
2. USB stick
3. USB charger
4. HDMI monitor
5. Tablet

Hereby ASSMANN Electronic GmbH declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below mentioned manufacturer address.

www.assmann.com
Assmann Electronic GmbH
Auf dem Schüffel 3
58513 Lüdenscheid
Germany

