


254 mm (10") and 482.6 (19") mm Combi Wall Mounting Cabinet





Abstract

254 mm (10") and 482.6 (19") mm Combi Wall Mounting Cabinet, color grey (RAL 7035)

Features

- Safety class IP20
- Lockable glass front door with 200° door opening angle
- 1-point-locking-mechanism on the front door
- Detachable side panels
- Revolving profile frame mounted on the front side inside of the cabinet, galvanized
- 254 mm (10") 10U horzizontally; 482.6 mm (19") 5U vertically
- Additional 254 mm (10") 10U profiles punched into the main frame in rear area
- Load capacity of profile rails: 30 kg
- Max. installation depth: approx. 260 mm to the rear wall; approx. 220 mm to the rear profile holes
- 1.1 1.5 strong sheet steel with a high loading capacity, powder coated
- Pre-punched cable entries in the roof and base chassis and rear side
- Including cable brushes and cover for fan cut-out
- Ventilation slots for active and passive ventilation and exhausting

Product Overview

The wall mounting cabinet offers the possibility of horizontal 254 mm (10") component mounting (10 height units) and alternatively a vertical 482.6 mm (19") component mounting (5 height units) due to a revolving profile frame. The front profile frame is depth variable and the rear side is prepared with an integrated 254 mm (10") frame as well. The housing is made out of a robust steel sheet construction and offers best possibilites for a neat cable management due to pre-punched entries in the roof, base and rear side. With its overall compact design this enclosure is ideal for current IT and telecommunication applications, especially in narrow areas or private households.

Product Number Information

Item	Color	Product Dimensions	Packaging Dimensions	Weight in kg
code		H x W x D in mm	H x W x D in mm	(net/gross)
DN-1019	Grey (RAL 7035)	550 x 350 x 350 mm	560 x 355 x 355 mm	10.3 kg / 11.5 kg

DIGITUS®/

Product Images
















Technical Drawings

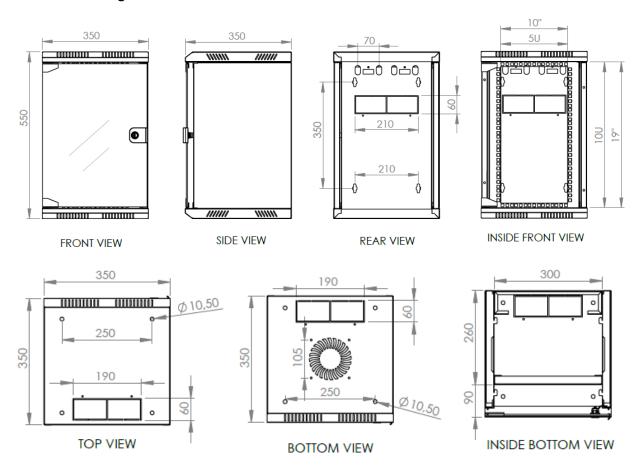

Assmann Electronic GmbH, Auf dem Schüffel 3, 58513 Lüdenscheid, Germany, info@assmann.com, printing errors, falsities and technical changes remain reserved