

**DIGITUS**[®]**Professional**

DIGITUS[®] Line Interactive UPS uninterruptible power supply with LCD 1000VA 230V

DN-170024

EAN 4016032288848



High performance protection for your business and office computer systems against data loss and damage

Output

Output Power Capacity	600Watts /1500 VA
Max Configurable Power	600 Watts /1500VA
Nominal Output Voltage	230V
Output Connections	(1) Schuko Socket (2) Schuko Socket


Input

Nominal Input Voltage	230V
Input Frequency	50/60 Hz +/- 4 Hz (auto sensing)
Input Connections	Schuko Plug
Cord Length	(1.2 meters)
Input voltage range for main Operations	196 - 280V
Input voltage adjustable range for mains operation	145 - 290V

Batteries & Runtime

Battery Type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : Leakproof
Typical recharge time	8 hour(s)
Replacement Battery	7AH/12V
Battery Quantity	2
Battery Weight	2,05 kg x 2

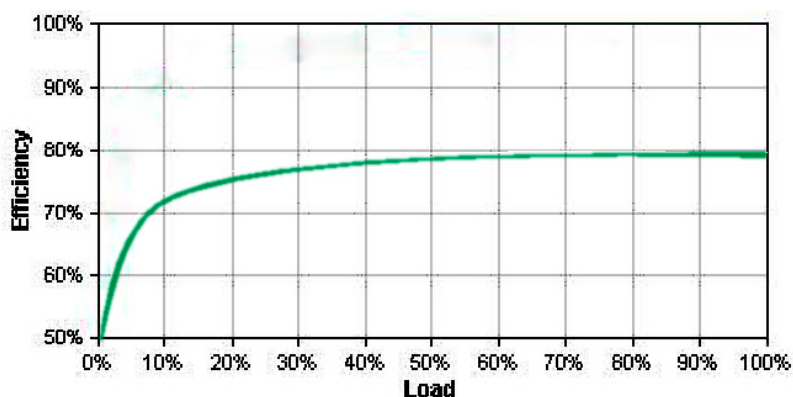


Energy Use/Efficiency


Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Communications & Management

Interface Port(s)	RJ11, RS-232, USB
Control panel	LCD status display with On Line : On Battery : Replace Battery and Overload indicators
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm

Surge Protection and Filtering

Surge energy rating	300 Joules
Filtering	Full time multi-pole noise filtering : 5% IEEE surge let-through : zero clamping response time : meets UL 1449
Data Line Protection	RJ-11 telephone line /Fax protection (two wire single line)

Physical

Maximum Height	6.30 inches (160 mm)
Maximum Width	3.80 inches (95 mm)
Maximum Depth	13.2 inches (335 mm)
Net Weight	22.0 lbs. (10 kg)
Shipping Weight	24.2 lbs. (11.0 kg)
Shipping Height	10.04 inches (255 mm)
Shipping Width	7.48 inches (190mm)
Shipping Depth	16.50 inches (420 mm)
Color	Black

Environmental

Operating Environment	32 - 104 F (0 - 40 C)
Operating Relative Humidity	20% - 95%
Operating Elevation	0-10000 feet (0-3000 meters)
Storage Temperature	5 - 113 F (-15 - 45 C)
Storage Relative Humidity	20% - 95%
Storage Elevation	0-50000 feet (0-15000 meters)
Audible noise at 1 meter from surface of uni	40.00 dBA
Online Thermal Dissipation	24.00 BTU/hr

Conformance

Regulatory Approvals CE, EN60950-1:2006; EN-62301:2005; EN62040-3 , VDE EN62040-2:2006; EN 6100-4-2:1995 + A1:1998+A2:2001