

Shelves for Fixed Installation in 483 mm (19") Cabinets





Abstract

Shelves for fixed installation in 483 mm (19") cabinets with 600, 800 or 1000 mm depth, color grey (RAL 7035) or black (RAL 9005)

Features

- for fixed installation on the front 483 mm (19") profile rails
- sturdy, perforated steel sheet
- Load capacity acc. to type from 15 100 kg
- Delivery inclusive fixing material
- Available in color grey (RAL 7035) and black (RAL 9005)

Product Overview

The shelves for fixed mounting can be installed easy on the two front 483 mm (19") profile rails of your 483 mm (19") network- or server cabinet. Due to their stable, perforated steel sheet with a high load capacity, they are the optimal surface for components which are not 483 mm (19") suitable.

Product Number Information

| Item code | U | Color | Product dimensions (HxWxD) in mm | Load capacity | Suitable cabinet depth |
|----------------------|---|------------------|-------------------------------------|---------------|------------------------|
| DN-97609 | 1 | Grey (RAL 7035) | 45x483x250 mm | 15 kg | all* |
| DN-19 TRAY-1-SW | 1 | Black (RAL 9005) | 45X465X25U [[[[[]] | | all |
| DN-97614 | 1 | Grey (RAL 7035) | 44x482x399 mm | 1 E ka | ≥ 600 mm |
| DN-19 TRAY-1-400-SW | 1 | Black (RAL 9005) | 4484028533 111111 | 15 kg | 2 600 111111 |
| DN-97610 | 2 | Grey (RAL 7035) | 88x482x349 mm | 25 kg | ≥ 450 mm |
| DN-19 TRAY-2-SW | 2 | Black (RAL 9005) | 0004020049 111111 | 25 kg | 2 450 IIIIII |
| DN-19 TRAY-2-55 | 2 | Grey (RAL 7035) | 88x482x549 mm | 25 kg | ≥ 800 mm |
| DN-19 TRAY-2-55-SW | 2 | Black (RAL 9005) | 88x482x549 mm 25 kg | | 2 000 111111 |
| DN-19 TRAY-1-1000 | 1 | Grey (RAL 7035) | 44x483x737 mm | 100 kg | ≥ 1000 mm |
| DN-19 TRAY-1-1000-SW | 1 | Black (RAL 9005) | 44x483x737 mm | | 2 1000 MM |

^{*} also suitable for Wall Mounting Cabinets with a depth less than 600 mm (e.g.: DN-19 09-U-S-1)




Logistic Information

| Item code | Net weight in kg | Gross weight in kg | Packaging dimensions (HxWxD) in mm | |
|----------------------|------------------|--------------------|---------------------------------------|--|
| DN-97609 | 1 2 1 ~ | 1.4 kg | 50x500x260 mm | |
| DN-19 TRAY-1-SW | 1.2 kg | | | |
| DN-97614 | 2.1 kg | 2.4 kg | 50x500x410 mm | |
| DN-19 TRAY-1-400-SW | 2.1 kg | | | |
| DN-97610 | 2.01/2 | 2.3 kg | 90x520x370 mm | |
| DN-19 TRAY-2-SW | 2.0 kg | | | |
| DN-19 TRAY-2-55 | 2 5 1/2 | 3.9 kg | 100x590x500 mm | |
| DN-19 TRAY-2-55-SW | 3.5 kg | | | |
| DN-19 TRAY-1-1000 | 4710 | F 1 l.= | 60x780x500 mm | |
| DN-19 TRAY-1-1000-SW | 4.7 kg | 5.1 kg | | |


Technical Drawings

DN-97609 & DN-19 TRAY-1-SW







DN-97614 & DN-19 TRAY-1-400-SW

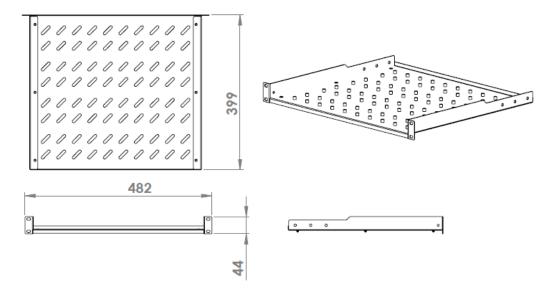

DN-97610 & DN-19 TRAY-2-SW

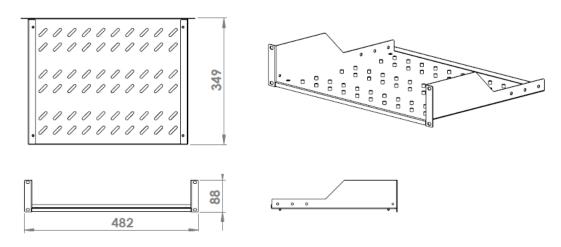

DN-19 TRAY-2-55 & DN-19 TRAY-2-55-SW

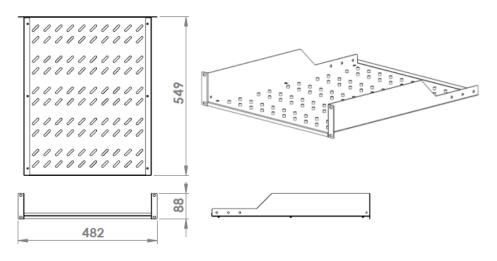

Assmann Electronic GmbH, Auf dem Schüffel 3, 58513 Lüdenscheid, Germany, info@assmann.com, printing errors, falsities and technical changes remain reserve



DN-19 TRAY-1-1000 & DN-19 TRAY-1-1000-SW

