




# L2 Managed Switches

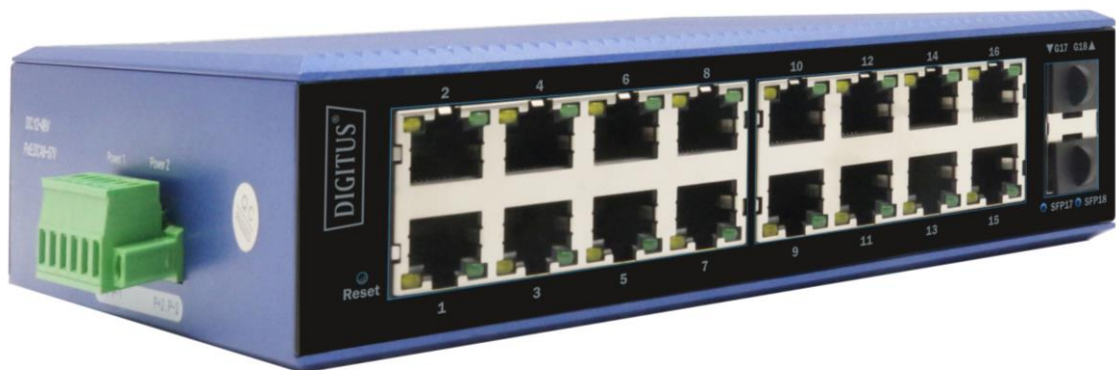

## CLI Manual

DN-651151 & DN-651155  
DN-651156 & DN-651157  
DN-651158 & DN-651159

# Table of Contents

<b>Chapter 1 System Status Commands .....</b>	<b>5</b>
<b>1.1 Command Mode .....</b>	<b>5</b>
<b>1.2 System information.....</b>	<b>6</b>
1.2.1 Show system.....	6
<b>1.3 Log information .....</b>	<b>7</b>
1.3.1 Show logging .....	7
<b>1.4 Port statistics .....</b>	<b>7</b>
1.4.1 Show interface.....	7
<b>Chapter 2 System Setup Commands .....</b>	<b>8</b>
<b>2.1 IP config.....</b>	<b>8</b>
2.1.1 ip address .....	8
2.1.2 ip address dhcp .....	8
2.1.3 ip address old_ip .....	9
2.1.4 show interface.....	9
<b>2.2 User config.....</b>	<b>10</b>
2.2.1 username name .....	10
<b>2.3 Time setting.....</b>	<b>11</b>
2.3.1 sntp enable disable .....	11
2.3.2 sntp unicast-server .....	11
2.3.3 sntp auto-sync timer .....	12
2.3.4 sntp connect.....	12
2.3.5 timezone.....	12
<b>Chapter 3 Port Configuration Commands .....</b>	<b>13</b>
<b>3.1 Port config .....</b>	<b>13</b>
3.1.1 speed.....	13
3.1.2 flow-control.....	14
3.1.3 shutdown .....	14
3.1.4 description.....	15
<b>3.2 Rate limit .....</b>	<b>15</b>
3.2.1 rate-limit.....	15
<b>3.3 Port mirroring .....</b>	<b>16</b>
3.3.1 monitor.....	16
<b>3.4 Link aggregation.....</b>	<b>17</b>
3.4.1 trunk.....	17
3.4.2 load-balance.....	18
3.4.3 lacp enable   disable .....	18
3.4.4 lacp active   passive .....	18
3.4.5 lacp port-key.....	19
3.4.6 lacp port-priority .....	19
3.4.7 example.....	20
<b>Chapter 4 Advanced Configuration Commands.....</b>	<b>21</b>
<b>4.1 VLAN config .....</b>	<b>21</b>
4.1.1 switchport mode .....	22
4.1.2 switchport pvid.....	23
4.1.3 switchport trunk hybrid  access.....	23
4.1.4 show vlan .....	24

<b>4.2 MAC config .....</b>	<b>26</b>
4.2.1 mac-address aging-time .....	26
4.2.2 show mac-address.....	27
<b>4.3 ARP config .....</b>	<b>27</b>
4.3.1 show arp.....	28
4.3.2 arp static.....	28
4.3.3 arp timeout .....	29
<b>4.4 MSTP config.....</b>	<b>30</b>
4.4.1 spanning-tree .....	30
4.4.2 spanning-tree mode.....	31
4.4.3 spanning-tree max-age.....	31
4.4.4 spanning-tree hello-time.....	32
4.4.5 spanning-tree forward-delay.....	32
4.4.6 spanning-tree max-hop .....	33
4.4.7 spanning-tree instance.....	33
4.4.8 .....	33
4.4.9 spanning-tree mstp revision.....	34
4.4.10 show spanning-tree.....	34
4.4.11 show spanning-tree interface brief .....	35
<b>4.5 IGMP-snooping .....</b>	<b>35</b>
4.5.1 igmp-snooping .....	36
4.5.2 igmp-snooping host-age-time .....	36
4.5.3 igmp-snooping fast-leave .....	37
4.5.4 igmp-snooping static-group .....	37
4.5.5 show igmp-snooping group.....	38
<b>4.6 DHCP snooping .....</b>	<b>38</b>
4.6.1 dhcp-snooping.....	38
4.6.2 dhcp-snooping.....	39
4.6.3 show dhcp-snooping .....	39
<b>4.7 QoS config .....</b>	<b>40</b>
4.7.1 QOS .....	40
4.7.2 cos default.....	41
4.7.3 cos map .....	41
4.7.4 dscp map .....	42
4.7.5 scheduler policy .....	42
4.7.6 example .....	43
<b>Chapter 5 Network Security Commands .....</b>	<b>45</b>
<b>5.1 Anti-attack .....</b>	<b>45</b>
5.1.1 system ignore icmp-echo .....	45
5.1.3 system protection ddos.....	46
5.1.3 system rate-limit.....	46
<b>5.2 MAC binding .....</b>	<b>47</b>
5.2.1 mac-address static.....	47
<b>5.3 ARP binding .....</b>	<b>47</b>
5.3.1 arp static.....	48
5.3.2show arp.....	48
<b>5.4 ACL config .....</b>	<b>49</b>
5.4.1 mac acl .....	50
5.4.2 ip acl .....	50
5.4.3 rule .....	51
5.4.4 ip/mac access-group .....	52

<b>5.5 802.1X config .....</b>	<b>52</b>
5.5.1 dot1x auth-port system-auth-ctrl.....	53
5.5.2 dot1x initialize interface IFNAME .....	53
5.5.3 dot1x radius-client source-interface HOSTNAME PORT .....	54
5.5.4 dot1x radius-server deadtime MIN .....	54
5.5.5 dot1x radius-server .....	55
5.5.6 dot1x re-authenticate .....	56
5.5.7 dot1x initialize .....	56
5.5.8 dot1x keytxenabled .....	57
5.5.9 dot1x port-control .....	57
5.5.10 dot1x protocol-version .....	58
5.5.11 dot1x quiet-period .....	58
5.5.12 dot1x re-authenticate .....	59
5.5.13 dot1x reauthMax.....	59
5.5.14 dot1x reauthentication .....	60
5.5.15 dot1x timeout .....	60
<b>5.6 Port isolation .....</b>	<b>61</b>
5.6.1 switchport protected.....	61
<b>5.7 Storm control.....</b>	<b>62</b>
5.7.1 storm-control broadcast pps .....	62
5.7.2 storm-control multicast pps .....	63
5.7.3 storm-control unicast pps .....	63
<b>5.8 ERPS config .....</b>	<b>64</b>
5.8.1 erps.....	65
5.8.2 erps xx .....	65
5.8.3 example.....	66
<b>5.9 IP source guard .....</b>	<b>68</b>
5.9.1 ip source-guard .....	68
5.9.2 ip source-guard trust.....	69
5.9.3 ip dhcp-snooping binding.....	70
<b>Chapter 6 Network Management Commands.....</b>	<b>71</b>
<b>6.1 HTTP config.....</b>	<b>71</b>
6.1.1 ip http-server http .....	71
6.1.2 ip http-server https .....	72
<b>6.2 SNMP config .....</b>	<b>72</b>
6.2.1 snmp.....	73
6.2.2 snmp-server trap2sink .....	73
6.2.3 snmp-server trap.....	74
6.2.4 snmp-server community .....	74
6.2.5 snmp host.....	74
6.2.6 snmp-server user .....	75
6.2.7 example .....	75
<b>Chapter 7 System Maintenance Commands .....</b>	<b>77</b>
<b>7.1 Reboot.....</b>	<b>77</b>
<b>7.2 System config restore .....</b>	<b>77</b>
<b>7.3 System config save .....</b>	<b>78</b>
<b>7.4 PING test .....</b>	<b>78</b>

# Chapter 1 System Status Commands

## 1.1 Command Mode

### Command description

How to enter and exit various mode states (privileged mode, global mode, interface mode, etc.)

Parameter	N/A
Default	N/A
Command mode	N/A

**eg.**

```
Switch Login: admin
```

```
password: admin (hide)
```

```
Switch>
```

```
// enter user mode
```

```
Switch>enable
```

```
Switch#
```

```
// enter privileged mode
```

```
Switch# configure terminal
```

```
Switch (config) # exit
```

```
Switch#
```

```
// enter global mode, exit to exit global mode and return to  
privileged mode
```

```
Switch# configure terminal
```

```
Switch (config) # interface G1
```

```
Switch (config-if) # exit
```

```
Switch (config) #
```

```
// in global mode, enter G1 interface mode, exit to exit interface  
mode
```

## 1.2 System information

This module can query software version, compilation time, device name, device serial number, mac address, CPU utilization, memory utilization, current system time and other information.

### 1.2.1 Show system

#### Command description

This command can query software version, compilation time, device name, device serial number, mac address, etc.

Parameter	N/A
Default	N/A
Command mode	User mode (connect to the serial port, enter the device user name and password to enter the user mode, use exit to exit the current mode)

eg.

Switch Login: admin

password: admin (Password is hidden)

Switch> show system

```
Switch> show system
Product Model      : switch
Hardware Version  : V1
Serial Number     : SN20210220
MAC Address       : AC:90:00:3F:3A:60
Firmware Version  : V1.0.0.1-gd06e45122
Compile Time      : Mar 23 2021 08:04:22
System Uptime     : 0 Day 0 Hours 56 Minutes 12 Seconds
System Time       : 1970-01-10 09:18:30
```

## 1.3 Log information

This module can view some system log information during the operation of the device, which is convenient for maintenance personnel to analyze problems.

### 1.3.1 Show logging

#### Command description

View the current log information of the switch

Parameter	N/A
Default	N/A
Command mode	User mode

eg.

```
Switch> show logging
```

## 1.4 Port statistics

In the port statistics module, you can view the number of packets sent/received by the global port, the number of bytes, and the number of packets filtered by the port.

### 1.4.1 Show interface

#### Command description

View switch port statistics

Parameter	<cr>	View statistics for all ports
	G<1-24>	View statistics about 1 port
Default	N/A	
Command mode	Privileged mode	

eg.

```
Switch# show interface G1
```

```
Switch# show interface G1
G1 is down
  Hardware address is AC-90-10-42-6A-D7
  Media type is MEDIUM_COPPER, loopback not set
  Autonegotiation enable, Flow control is off
  Speed: 1000, Duplex-half, Max frame size: 1518
  Ifindex: 0x2000001
  Port link-type: access, PVID is 1
Switch# █
```

# Chapter 2 System Setup Commands

## 2.1 IP config

**IP configuration commands are:**

ip address

ip address dhcp

ip address old\_ip A.B.C.D/M new\_ip A.B.C.D/M

Show ip interface

**Note:** A.B.C.D/M, format example: 192.168.1.1/24

The ip configuration module can add, modify or view the interface ip information of the switch;

### 2.1.1 ip address

#### Command description

Configure the ip as A.B.C.D/M

Parameter	N/A
Default	Interface mode
Command mode	Configure this command in interface configuration mode

**eg.**

Switch (config) # interface eth0

Switch (config-vif) #ip address 192.168.100.1/24

Switch (config-vif) #no ip address 192.168.100.1/24

### 2.1.2 ip address dhcp

#### Command description

Configure the port ip as the automatic acquisition method (the dhcp server in the network will assign a dynamic ip to the switch port)

no ip address dhcp, Indicates that the ip of the disabled interface is obtained automatically

Parameter	N/A
Default	N/A
Command mode	Configure this command in interface configuration mode



eg.

```
Switch (config) # interface eth0
```

```
Switch (config-vif) #ip address dhcp
```

```
Switch (config-vif) #no ip address dhcp
```

### 2.1.3 ip address old\_ip

#### Command description

```
ip address old_ip A.B.C.D/M new_ip A.B.C.D/M
```

Modify the ip configuration of the interface (modify old\_ip to new\_ip)

Parameter	N/A
Default	N/A
Command mode	Interface mode

eg.

```
Switch (config) # interface eth0
```

```
Switch (config-vif) #ip address old_ip 192.168.255.1/24 new_ip  
192.168.10.1/24
```

### 2.1.4 Show interface

#### Command description

View the ip configuration of the interface

Parameter	N/A
Default	N/A
Command mode	Privileged Mode or Global Mode

eg.

```
Switch (config) #show interface eth0
```

```
switch#show interface eth0
```

```
Switch(config)# sho interface eth0  
Interface eth0 is up, line protocol is up  
  Link ups:      1  last: Wed, 11 May 2022 00:24:11 +0800  
  Link downs:    0  last: <never>  
  vrf: 0  
  index 3 metric 0 mtu 1500  
  flags: <UP,BROADCAST,RUNNING,MULTICAST>  
  Type: Ethernet  
  HWaddr: ac:90:10:42:6a:d6  
  inet 192.168.10.120/24 broadcast 192.168.10.255  
  inet6 fe80::fe01/64
```

## 2.2 User config

User configuration commands are:

Username

Show user

Note: name means username, up to 32 characters; passwd means password, up to 32 characters;

### 2.2.1 Username name

#### Command description

Username name password passwd

Change a user's password

Parameter	N/A
Default	N/A
Command mode	Global mode

eg.

```
Switch (config) #username admin password simple 123456
```

```
// modify user: admin, password: 123456,
```

```
Show user
```

Command description

View all current user configuration information of the switch;

Parameter	N/A
Default	N/A
Command mode	Privileged mode
Use command mode	

eg.

```
Switch # show user
```

## 2.3 Time setting

The configuration commands are:

sntp enable | disable

sntp unicast-server

sntp auto-sync timer

sntp connect

sntp timezone

This feature enables the switch to automatically synchronize the network time

### 2.3.1 sntp enable | disable

#### Command description

sntp enable, enable ntp function;

sntp disable, disable ntp function;

Parameter	N/A
Default	Disable
Command mode	Global mode

eg.

Switch (config) #sntp enable

Switch (config) #sntp disable

### 2.3.2 sntp unicast-server

#### Command description

sntp unicast-server A.B.C.D

Configure sntp server address

No sntp unicast-server A.B.C.D, To delete an ntp server address

Parameter	N/A
Default	N/A
Command mode	Global mode

eg.

Switch (config) #sntp unicast-server 210.21.196.6

### 2.3.3 sntp auto-sync timer

#### Command description

Configure sntp synchronization interval

Parameter	sntp auto-sync timer time,The value range of time is 5-65535s, the default value is 300s;
Default	300s
Command mode	Global mode

eg.

Switch (config) #sntp auto-sync timer 5

### 2.3.4 sntp connect

#### Command description

sntp connect A.B.C.D

Use this command to select the current sntp server to connect to.

Parameter	N/A
Default	N/A
Command mode	Global mode

eg.

Switch (config) #sntp connect 210.21.196.6

### 2.3.5 timezone

#### Command description

Switch (config) # timezone

Use this command to select the time zone of the region where the current switch is located

Parameter	N/A
Default	0
Command mode	Global mode

eg.

Switch (config) # timezone UTC-8

// Modify the time zone to UTC-8

# Chapter 3 Port Configuration Commands

## 3.1 Port config

The port configuration commands are:

Duplex

Speed

Flow-control

Shutdown

Description

This module configures various basic parameters related to switch ports. The basic parameters of the port will directly affect the way the port works.

### 3.1.1 Speed

#### Command description

Speed {10-(auto/full) | 100-(auto/full/half) | 1000-(auto,full,half) | 10000 | auto }

Set the port speed and duplex mode

Parameter	1000M-auto	Set the port rate to 1000M and the duplex mode to auto
	1000M-full	Set the port rate to 1000M and the duplex mode to full duplex
	100M-auto	Set the port rate to 100M and the duplex mode to auto
	100M-full	Set the port rate to 100M and the duplex mode to full duplex
	100M-half	Set the port rate to 100M and the duplex mode to half duplex
	10M-auto	Set the port rate to 10M and the duplex mode to auto
	10M-full	Set the port rate to 10M and the duplex mode to full duplex
	10M-half	Set the port rate to 10M and the duplex mode to half duplex
	auto	Set the port rate to auto-negotiation

Default	All interfaces are auto-negotiated (auto),
Command mode	Interface mode

**eg.**

Set the port rate of G1 to 100M full duplex.

Switch (config) # interface G1

Switch (config-if) # speed 100M-full

### 3.1.2 flow-control

#### Command description

flowctrl

No flowctrl

Configure the flow control function of the port.

Parameter	N/A
Default	Disable
Command mode	Interface mode

**eg.**

Enable the flow control function of the port.

Switch (config-if) # flowctrl

### 3.1.3 Shutdown

#### Command description

Shutdown

No shutdown

Configure the opening and closing of ports.

Default	Enabled
Command mode	Interface mode

**eg.**

Disable port

Switch (config-if) # shutdown

### 3.1.4 Description

#### Command description

Configure the description information of the port for easy management (composed of letters, numbers and underscores).

Default	N/A
Command mode	Interface mode

**eg.**

Switch (config-if) # description A1

### 3.2 Rate limit

The rate limiting policy of the port can be configured to limit the rate of all data packets entering and leaving the port.

#### 3.2.1 rate-limit

#### Command description

Rate-limit {1-10000000} {1-65535} {1-10000000} {1-65535}

No rate-limit

Configure the port egress/ingress rate limit function, use the no form, and the port returns to the Default setting.

Parameter	1-10000000	Port speed limit rate range 1-10000000kbps
	1-65535	Port rate limit burst size range 1-65535kbits
Default	N/A	
Command mode	Interface mode	

**eg.**

The export speed limit is 10000kbps, the burst size is 1000kbits, and the entrance is not limited

Switch (config-if) # rate-limit 10000 1000 0 0

### 3.3 Port mirroring

Port mirroring is also called port monitoring. Port monitoring is a data packet acquisition technology. By configuring the switch, the data packets of one or several ports (mirror source ports) can be copied to a specific port (mirror destination port). There is an installation on the mirror destination port. The host computer with data packet analysis software is used to analyze the collected data packets, so as to achieve the purpose of network monitoring and troubleshooting.

#### 3.3.1 Monitor

##### Command description

Mirror to <IFNAME>

Mirror sources direction {both | egress | ingress}

No mirror

To configure the port mirroring function, use the no form of this command to delete the mirroring settings

Parameter	IFNAME	Port number, such as G1, X1
Default	N/A	
Command mode	Configuring Destination Ports in Global Configuration Mode Configuring Source Ports in Interface Configuration Mode	

**eg.**

Configure the destination port as G3 and the source ports as G1 and G2.

```
Switch (config) # monitor to G3
```

```
Switch (config) # interface G1
```

```
Switch (config-if) # mirror source direction both
```

```
Switch (config-if) #exit
```

```
Switch (config) # interface G2
```

```
Switch (config-if) # mirror source direction both
```



## 3.4 Link aggregation

**The port static aggregation configuration commands are:**

Trunk

The configuration commands for port dynamic aggregation are:

lacp enable | disable

lacp active | passive

lacp key

lacp port-priority

Link aggregation is to form multiple physical ports of a switch into a logical port, and multiple links belonging to the same aggregation group can be regarded as a larger bandwidth logical link.

Link aggregation can realize the sharing of communication traffic among the member ports in the aggregation group to increase the bandwidth. At the same time, each member port of the same aggregation group is backed up dynamically with each other, which improves the reliability of the link.

Member ports belonging to the same aggregation group must have the same configuration. These configurations mainly include STP, QoS, VLAN, port attributes, MAC address learning, ERPS configuration, loop Protect configuration, mirroring, 802.1x, IP filtering, Mac filtering, Port isolation, etc.

### 3.4.1 Trunk

#### Command description

Interface trunk [aggregation group ID]

Configure aggregation groups.

Trunk [aggregation group ID]

Default	N/A
Command mode	Global mode

**eg.**

Switch (config) # interface trunk 1

Switch (config) # interface G1

Switch (config-if) # trunk 1

### 3.4.2 load-balance

#### Command description

Trunk load-balance (Set the load balancing mode for static aggregation)

Parameter	srcdst-mac	Load balancing based on source and destination mac
	dst-mac	Load balancing based on destination mac
	src-mac	Load balancing based on source mac
Default	Disable	
Command mode	Interface mode	

eg.

Set load balancing mode to source-destination mac  
Switch (config) # trunk load-balance both-mac

### 3.4.3 LACP enable | disable

#### Command description

lACP enable, Configuring Port Dynamic Aggregation Enable  
lACP disable, Disable port Dynamic Aggregation

Parameter	N/A
Default	Disable
Command mode	Interface mode

eg.

Switch (config-if) # lACP disable

### 3.4.4 lACP active | passive

#### Command description

lACP activity-mode active, Set the port to active state  
lACP activity-mode passive, Set the port to passive state

Parameter	N/A
Default	Passive
Command mode	Interface mode

eg.

Switch (config-if) # lACP activity-mode active

### 3.4.5 lacp port-key

#### Command description

Lacp key, which refers to the management key value of the dynamic aggregation port, is one of the identifiers that the port can add to an aggregation group. An operation key generated by the LACP protocol according to the port configuration (that is, rate, duplex, basic configuration, and management key). For a dynamic aggregation group, members of the same group must have the same operation key for successful aggregation.

Parameter	<1-65535> Manually specify the range 1-65535
Default	0
Command mode	Interface mode

eg.

```
Switch (config) # interface G1
```

```
Switch (config-if) # lacp port-key 100
```

### 3.4.6 lacp port-priority

#### Command description

lacp port-priority <1-32768> , Configure lacp port priority

Parameter	<1-32768> , Priority range, the smaller the value, the higher the priority
Default	0
Command mode	Interface mode


eg.

```
Switch (config) # interface G1
```

```
Switch (config-if) # lacp port-priority 100
```

### 3.4.7 Example

Use link aggregation to increase device cascading port bandwidth and implement load balancing based on source and destination MAC addresses

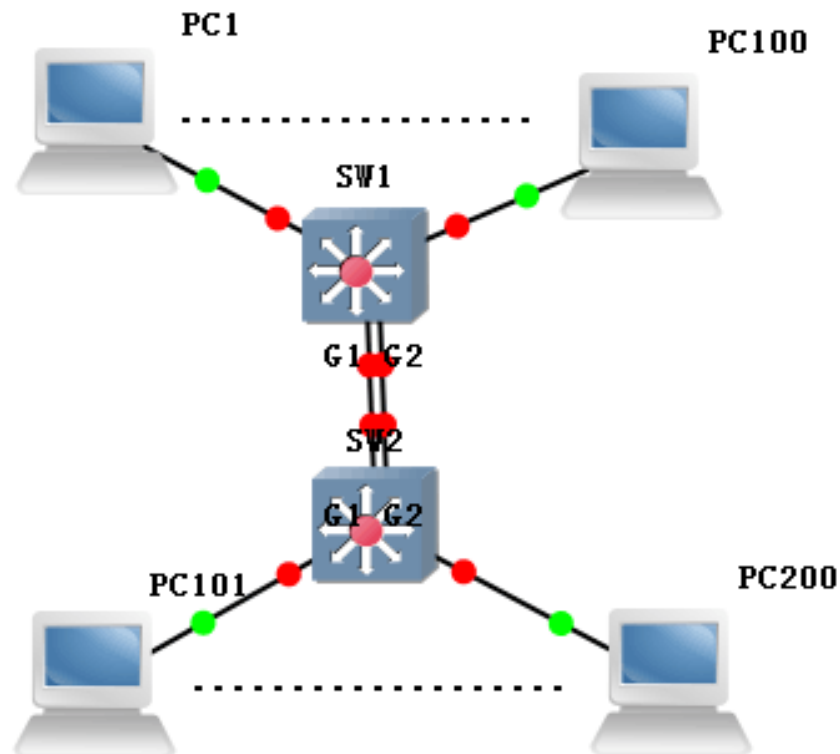

#### SW1/SW2:

Switch # configure terminal

Switch (config) #trunk load-balance both-mac

Switch (config) # interface G1

Switch (config-if) # trunk 1

Switch (config-if) # exit

Switch (config) # interface G2

Switch (config-if) # trunk 1

#### Phenomenon

After aggregation, the two links form a logical link, which doubles the bandwidth and performs load balancing according to the source or destination MAC address. Communication is interrupted.

# Chapter 4 Advanced Configuration Commands

## 4.1 VLAN config

**Vlan configuration commands are:**

Switch port mode

Switch port pvid

Switch port trunk|hybrid| access

Show vlan

Ethernet is a shared communication medium based on CSMA/CD (Carrier Sense Multiple Access with Collision Detection) technology. A local area network built with Ethernet technology is both a collision domain and a broadcast domain. When there are a large number of hosts in the network, it will lead to serious conflicts, flooding of broadcasts, significant performance degradation, and even network unavailability. By deploying bridges or Layer 2 switches in the Ethernet, serious conflicts can be resolved, but broadcast packets cannot be isolated. In this case, the VLAN (Virtual Local Area Network, virtual local area network) technology appears, which can divide a physical LAN into multiple logical LANs—VLANs. Hosts in the same VLAN can communicate with each other directly, but hosts in different VLANs cannot communicate with each other directly. In this way, broadcast packets are limited to the same VLAN, that is, each VLAN is a broadcast domain.

**The advantages of VLAN are as follows:**

- 1) Improve network performance. The broadcast packet is limited to the VLAN, so as to effectively control the broadcast storm of the network, save the network bandwidth, and thus improve the network processing capacity.
- 2) Enhance network security. Devices in different VLANs cannot access each other, and hosts in different VLANs cannot communicate directly. Packets need to be forwarded at Layer 3 through network layer devices such as routers or Layer 3 switches.
- 3) Simplify network management. The hosts of the same virtual workgroup are not limited to a certain physical range, which simplifies network management and facilitates the establishment of workgroups by people in different areas.

### 4.1.1 Switch port mode

#### Command description

Switch port mode {access | trunk | hybrid}

Configure Port Mode

Parameter	access	access mode
	trunk	trunk mode
	Hybrid	hybrid mode
Default	Access mode	
Command mode	Port configuration mode The switch port supports the following modes: access mode, trunk mode, hybrid mode Access mode means that the port belongs to only one VLAN and only sends and receives N/A tagged Ethernet frames Trunk mode means that the port is connected to other switches and can send and receive tagged Ethernet frames Hybrid mode means that the port can be connected to both a computer, a switch and a router (a collection of access mode and trunk mode)	

**eg.**

Configure port in VLAN trunk mode/promiscuous mode/access mode

Switch (config) # interface G1

Switch (config-if) #switchport mode trunk /hybrid/access

### 4.1.2 Switch port pvid

#### Command description

Switch port pvid {vlan-id}

Parameter	Vlan-id	Vlan ID. Value range: 1-4094.
Default	Vlan1	
Command mode	Port configuration mode. This command can change the default vlan of the port	

**eg.**

Set the default vlan of the port to vlan2

```
Switch (config) # interface G1
```

```
Switch (config-if) # switchport pvid 2
```

### 4.1.3 Switchport trunk|hybrid| access

#### Command description

switchport trunk tag {vlan-id}

switchport hybrid tag|untag|unpvid {vlan-id}

Switchport access {vlan-id}

Parameter	Vlan-id	Vlan ID, value range: 1-4094.
Default	All ports are members of vlan1 and do not belong to other vlans	
Command mode	Port configuration mode. This command can add port settings to one or more vlans	

**eg.**

The following command is to add trunk mode port to one vlan or multiple vlans

```
Switch (config) # interface G1
```

```
Switch (config-if) # switchport mode trunk
```

```
Switch (config-if) # switchport trunk tag 2
```

```
Switch (config-if) # switchport trunk tag 3-4
```

The following command is to add a hybrid mode port to one vlan or multiple vlans

```
Switch (config-if) # switchport mode hybrid
```

```
Switch (config-if) # switchport hybrid tag|untag 2
```

```
Switch (config-if) # switchport hybrid tag|untag 3-4
```

The following command is to add the access mode port to vlan2

```
Switch (config-if) # switchport access 2
```

#### 4.1.4 Show vlan

##### Command description

Show vlan [vlan-id]

Parameter	vlan-id	Displays the given VLAN. Value range: 1-4094.
Default	N/A	
Command mode	User mode	
Use command mode	This command can view vlan members	

**eg.**

Show all VLAN information

Switch# show vlan all


Vid Status Name Tag\_port Utag\_port

```
-----  
1 static vlan1 G1 G2 G3 G4 G5 G6 G7 G8 G9 G10 G11 G12  
G13 G14 G15 G16 G17 G18 G19 G20 G21 G22 G23 G24 G25 G26  
G27 G28  
2 static vlan2  
3 static vlan3
```



### 4.1.5 Example

Realize vlan communication across switches (pc1 and pc2 can access normally)

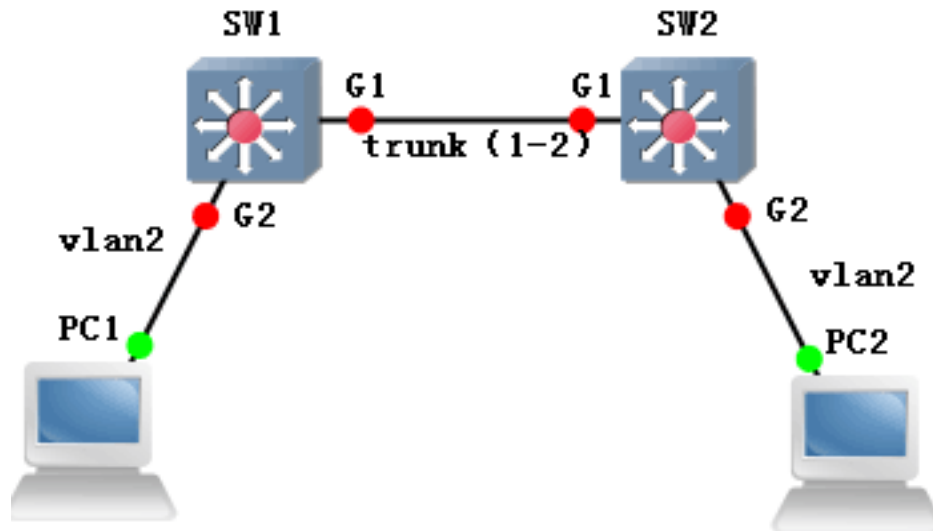

#### SW1/SW2: switch# configure terminal

```
Switch (config) # interface G1
```

```
Switch (config-if) # switchport mode trunk
```

```
Switch (config-if) # switchport trunk tag 2
```

```
Switch (config-if) # exit
```

```
Switch (config) # interface G2
```

```
Switch (config-if) # switchport mode access
```

```
Switch (config-if) # switchport access vlan 2
```

#### Phenomenon

pc1 (192.168.222.107) and pc2 (192.168.222.94) ping each other

```
C:\Users\Administrator>ping 192.168.222.94
正在 Ping 192.168.222.94 具有 32 字节的数据:
来自 192.168.222.94 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.94 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.94 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.94 的回复: 字节=32 时间<1ms TTL=64
```

## 4.2 MAC config

The configuration commands are:

Mac-address aging-time

Show mac-address

The reason why the switch can directly send data packets to the destination node, instead of sending data packets to all nodes in a broadcast mode like a hub, is that the most critical technology is that the switch can identify the MAC addresses of the network cards of the nodes connected to the network, and place them. to a place called the MAC Address Table. This MAC address table is stored in the cache of the switch, and these addresses are remembered, so that when data needs to be sent to the destination address, the switch can look up the node location of this MAC address in the MAC address table, and then directly to this location sent by the node. The so-called number of MAC addresses refers to the maximum number of MAC addresses that can be stored in the MAC address table of the switch. The greater the number of stored MAC addresses, the higher the speed and efficiency of data forwarding.

### 4.2.1 mac-address aging-time

Command description

Mac-address aging-time {10-1000000}

No mac-address aging-time

Configure the Mac aging time, use the no form of this command to restore the default setting

Parameter	time	MAC address aging time in seconds.
Default		300
Command mode		Global configuration mode
Use command mode		Configuring the aging time of mac addresses in global configuration mode

eg.

Configure the MAC address aging time to 100 seconds

Switch (config) # mac-address aging-time 100

Restore the MAC address aging time to the default 300 seconds

Switch (config) # no mac-address aging-time

## 4.2.2 Show mac-address

### Command description

Show mac-address {aging-time}

Parameter	N/A
Default	N/A
Command mode	User mode or global mode
Use command mode	After using this command, you can view the aging time of the mac address and mac address

**eg.**

The following command can check the aging time of mac address and mac address

```
Switch# show mac-address
```

MAC	Vlan Port	Type
94-de-80-dc-cf-38 1	G4	dynamic
60-92-17-9d-30-c3 1	G4	dynamic

```
Switch# show mac-address aging-time
```

```
Mac address aging-time: 100
```

## 4.3 ARP config

**The configuration commands are:**

```
Show arp
```

```
arp static
```

```
arp timeout
```

This function module can view the arp entry information learned by the switch, add static arp entries to prevent illegal host access, and modify the aging time of arp entries.

### 4.3.1 Show arp

Command description

Show arp

If you want to view dynamic ARP entries, you can use this command.

Parameter	N/A
Default	N/A
Command mode	Configure this command in global configuration mode
Use command mode	

**eg.**

Check dynamic ARP entries.

Switch (config) # show arp

### 4.3.2 arp static

**Command description**

arp static ip\_addr mac\_addr

No arp static ip\_addr

If you want to add static ARP, you can configure it through this command. Use the no form of this command to cancel this configuration.

Parameter	ip_addr	IP address, the value range is X.X.X.X.
	mac_addr	mac address, value range: H.H.H
Default	N/A	
Command mode	Global configuration mode	

**eg.**

Add static ARP entry

Switch (config) # arp static 192.168.111.1 00-00-a1-b2-c3-d4

### 4.3.3 arp timeout

#### Command description

arp timeout seconds

No arp timeout

If you want to set the ARP aging time, you can use this command to configure it. Use the no form of this command to cancel this configuration.

Parameter	seconds	Unit: second, the value range is 1-2147483.
Default	N/A	
Command mode	Interface mode	
Use command mode		

**eg.**

Set the ARP aging time to 3000 seconds.

Switch (config) # interface eth0

Switch (config-vlanif1) # arp timeout 3000

## 4.4 MSTP config

The configuration commands are:

Spanning-tree

Spanning-tree mode

Spanning-tree max-age

Spanning-tree hello-time

Spanning-tree forward-delay

Spanning-tree max-hop

Spanning-tree instance

Show spanning-tree

Show spanning-tree interface brief

STP (Spanning Tree Protocol, Spanning Tree Protocol) is a protocol established according to the IEEE 802.1D standard for eliminating physical loops at the data link layer in a local area network. Devices running this protocol discover loops in the network by exchanging information with each other, selectively block certain ports, and finally prune the loop network structure into a tree structure of N/A loops, thereby preventing packets In the loop network, the number of loops and N/A limit loops are constantly increased, so as to avoid the problem that the packet processing capability is reduced due to the repeated reception of the same packet by the device.

### 4.4.1 spanning-tree

#### Command description

Spanning-tree

No spanning-tree

To configure the STP enable setting, use the no form of this command to disable STP.

Parameter	N/A
Default	Disable
Command mode	Global mode

eg.

Switch (config) # spanning-tree

Switch (config) # no spanning-tree

#### 4.4.2 spanning-tree mode

##### Command description

Spanning-tree mode {stp | rstp | mstp}

Parameter	Stp	Enable STP mode
	rstp	Enable RSTP mode
	mstp	Enable MSTP mode
Default	Default enable STP mode	
Command mode	Global mode	
Use command mode	Configure spanning-tree operation mode	

**eg.**

The following command will enable RSTP mode:

Switch (config) # spanning-tree mode rstp

#### 4.4.3 spanning-tree max-age

##### Command description

Spanning-tree max-age {6-40}

Parameter	seconds	BPDU maximum lifetime. Value range: 6-40s.
Default	20s	
Command mode	Global mode	
Use command mode	Configure the maximum time to live for STP BPDUs	

**eg.**

The following command will configure the maximum time-to-live for STP to 24 seconds:

Switch (config) # spanning-tree max-age 24

#### 4.4.4 spanning-tree hello-time

##### Command description

spanning-tree hello-time { 1-10 }

Parameter	Time	Interval for sending hello packets, value range: 1-10s.
Default	2s	
Command mode	Global configuration mode	

**eg.**

The following command will configure the interval for sending STP hello packets to 10 seconds:

Switch (config) # spanning-tree hello-time 10

#### 4.4.5 spanning-tree forward-delay

##### Command description

spanning-tree forward-delay { 4-30 }

Parameter	time	Forwarding delay time. Value range: 4-30s.
Default	15 seconds	
Command mode	Global configuration mode	
Use command mode		

**eg.**

The following command will configure the STP forwarding delay to 20 seconds:

Switch (config) # spanning-tree forward-delay 20



#### 4.4.6 spanning-tree max-hop

##### Command description

spanning-tree max-hop { 1-40 }

Parameter	Hop count	The maximum number of hops valid for a BPDU protocol packet. Value range: 1-40.
Default	20	
Command mode	Global configuration mode	

eg.

The following command will configure the maximum number of hops valid for BPDU protocol packets to be 40:

```
Switch (config) # spanning-tree max-hop 40
```

#### 4.4.7 spanning-tree instance

##### Command description

Spanning-tree instance configures the mapping relationship between MSTP vlan and instance

Parameter	N/A
Default	N/A
Command mode	Global configuration mode

eg.

```
Switch (config) # spanning-tree instance 44 vid 4
```

#### 4.4.8 spanning-tree mstp name

##### Command description

Spanning-tree mstp name, Configure the domain name of mstp

Parameter	N/A
Default	N/A
Command mode	Global configuration mode

eg.

```
Switch (config) # spanning-tree mstp name 2
```

#### 4.4.9 spanning-tree mstp revision

##### Command description

Spanning-tree mstp revision, Configure the revision number of mstp

Parameter	N/A
Default	N/A
Command mode	Global configuration mode

eg.

Switch (config) # spanning-tree mstp revision 2

#### 4.4.10 show spanning-tree

##### Command description

Show spanning-tree

Parameter	N/A
Default	N/A
Command mode	Privileged Mode/Global Mode
Use command mode	After using this command, can view mstp information

eg.

The following command can view mstp information:

Switch# show spanning-tree

##### Spanning-tree is disable:

Max age	20	bridge forward delay	20
Forward delay	15	max hops	20
Hello time	2	orce protocol version mstp	

#### 4.4.11 show spanning-tree interface brief

##### Command description

Show spanning-tree interface brief

Parameter	N/A
Default	N/A
Command mode	Privileged Mode/Global Mode
Use command mode	After using this command, you can view mstp information

eg.

Switch (config) # show spanning-tree interface brief

```
Switch# show spanning-tree interface brief
MSTID Port          Role           State
-----
0       G1               Disabled      forwarding
0       G2               Disabled      forwarding
0       G3               Disabled      forwarding
0       G4               Disabled      forwarding
0       G5               Disabled      forwarding
0       G6               Disabled      forwarding
0       G7               Disabled      forwarding
0       G8               Disabled      forwarding
0       G9               Disabled      forwarding
0       G10              Disabled      forwarding
```

## 4.5 IGMP-snooping

The configuration commands are:

Igmp-snooping

Igmp-snooping host-age-time

Igmp-snooping fast-leave

Igmp-snooping static-group

Show igmp-snooping group

IGMP Snooping is the abbreviation of Internet Group Management Protocol Snooping (Internet Group Management Protocol Snooping).

It is a multicast constraint mechanism running on Layer 2 devices to manage and control multicast groups.

### 4.5.1 igmp-snooping

#### Command description

igmp-snooping

No igmp-snooping

Configure to enable the IGMP snooping function, use the no form of this command to disable this function.

Parameter	N/A
Default	Disable
Command mode	Global mode

**eg.**

The following commands will configure enable and disable igmp-snooping:

Switch (config) # igmp-snooping

Switch (config) #no igmp-snooping

### 4.5.2 igmp-snooping host-age-time

#### Command description

igmp-snooping host-age-time { 200-1000 }

Parameter	time	Host aging time. Value range: 200-1000s.
Default	300	
Command mode	Global configuration mode	
Use command mode	Configure the host aging time	

**eg.**

The following command will configure the host aging time to 200s:

Switch (config) # igmp-snooping host-age-time 200

### 4.5.3 igmp-snooping fast-leave

#### Command description

Igmp-snooping fast-leave

No igmp-snooping fast-leave

Configure to enable the port fast leave function, and use the no form of this command to disable this function.

Parameter	N/A
Default	Disable
Command mode	Interface mode
Use command mode	

**eg.**

```
Switch (config) # vlan 1
```

```
Switch (config-vlan) # igmp-snooping fast-leave
```

### 4.5.4 igmp-snooping static-group

#### Command description

Igmp-snooping static-group, Add static multicast group

No igmp-snooping static-group, Delete an added static multicast group

Parameter	N/A
Default	Disable
Command mode	Interface mode

**eg.**

```
Switch (config) # interface G1
```

```
Switch (config-if) # igmp-snooping static-group 224.1.1.1 vlan 2
```

```
Switch (config-if) # no igmp-snooping static-group 224.1.1.1 vlan 2
```

## 4.5.5 Show igmp-snooping group

### Command description

Show igmp-snooping group

Parameter	N/A
Default	N/A
Command mode	User mode
Use command mode	

**eg.**

The following command will view multicast group information:

```
Switch# show igmp-snooping group
```

```
VID  SOURCE          GROUP             interFACE
-----
1    0.0.0.0           233.45.18.88     G4
1    0.0.0.0           239.255.255.250  G4 G2
1    0.0.0.0           224.0.0.252      G2 G4
```

## 4.6 DHCP snooping

### Command description:

Dhcp-snooping

#### 4.6.1 dhcp-snooping

### Command description

Dhcp-snooping

No dhcp-snooping

To enable the DHCP snooping function, use the no form of this command to disable this function

Parameter	N/A
Default	Disable
Command mode	Global mode

**eg.**

N/A

## 4.6.2 dhcp-snooping

### Command description

Dhcp-snooping untrust

No dhcp-snooping untrust

To set the port mode to untrust, use the no form of this command to configure the port mode to trust.

Parameter	N/A
Default	untrust
Command mode	Interface mode

**eg.**

Set the mode of port 1 to trust

Switch (config-if) # no dhcp-snooping untrust

## 4.6.3 Show dhcp-snooping

### Command description

Show dhcp-snooping

Parameter	N/A
Default	N/A
Command mode	Privileged mode

**eg.**

Switch# show dhcp-snooping

## 4.7 QoS config

### Command description:

qos

Cos default

Cos map

dscp map

Scheduler police

### Function introduction

QoS (Quality of Service) refers to a network that can use various basic technologies to provide better service capabilities for specified network communications. It is a security mechanism of the network and is used to solve problems such as network delay and congestion. A technology. Under normal circumstances, if the network is only used for a specific N/A time-limited application system, QoS is not required, such as Web applications, or E-mail settings. But it is necessary for critical applications and multimedia applications. When the network is overloaded or congested, QoS ensures that important traffic is not delayed or dropped, while maintaining the efficient operation of the network.

### 4.7.1 QOS

#### Command description

Qos remask<all/cos/dscp>

Change QoS Trust Mode Weight.

Parameter	N/A
Default	Cos
Command mode	Interface mode

**eg.**

Modify the qos trust mode of the optimal G1 port to dscp

Switch (config) # interface G1

Switch (config-if) # qos trust dscp



## 4.7.2 Cos default

### Command description

Cos default<0-7>

Parameter	N/A
Default	0
Command mode	Interface mode

**eg.**

Modify the default cos priority of the G1 port

Switch (config) # interface g1

Switch (config-if) # cos default 6

## 4.7.3 Cos map

### Command description

Cos map

Set the mapping relationship between cos priority and queue

Parameter	N/A
Default	One-to-one mapping between priorities and queues
Command mode	Global mode

**eg.**

Map cos priority 0 to queue 3

Switch (config) # cos map 0 3

#### 4.7.4 dscp map

##### Command description

dscp map

Set the mapping relationship between dscp priority and cos priority

Parameter	N/A	
Default	Dscp priority	Cos priority
	0-7	0
	8-15	1
	16-23	2
	24-31	3
	32-39	4
	40-47	5
	48-55	6
	56-63	7
Command mode	Global mode	

eg.

Map dscp priority 45 to cos priority 7

Switch (config) # dscp map 45 7 7

#### 4.7.5 Scheduler policy

##### Command description

Scheduler police

Set QoS scheduling algorithm

Parameter	sp	Strict priority mode: the queue with the highest priority is served first until the priority is empty, then the queue with the next highest priority is served, and so on.
	wrr	Weighted round robin scheduling algorithm: supports different bandwidth requirements, and can allocate different proportions of output bandwidth to different queues.
Default	sp	
Command mode	Global mode	


eg.

Switch (config) # scheduler policy wrr 1 2 3 4 5 6 7 8

#### 4.7.6 Example

Test topology (test port-based QoS)

The 1-3 ports of the Ixia tester correspond to the G18-G22 of the switch respectively

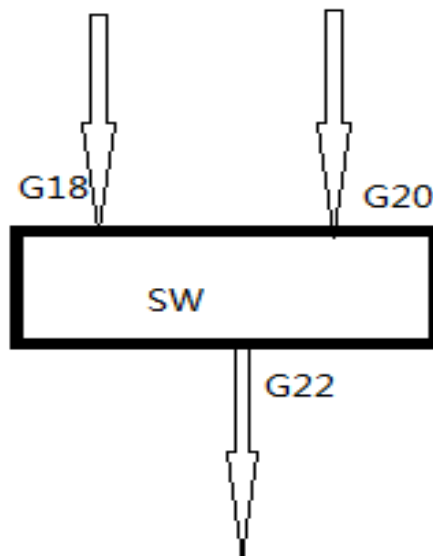


##### (1) configuration

// When the data packet of the ingress port does not carry any priority flag, it will enter the corresponding queue with the priority set by the port.

Set the priority of 7 to the data packets entering port 18 of the switch, and the priority of 6 to the data packets of port 20.

```
Switch (config) #interface G18
Switch (config-if) cos default 7
Switch (config-if) no qos trust
Switch (config-if) exit
Switch (config) #interface G20
Switch (config-if) cos default 6
Switch (config-if) no qos trust
```

b、 Set the destination address of Ixia1-2 to Ixia3

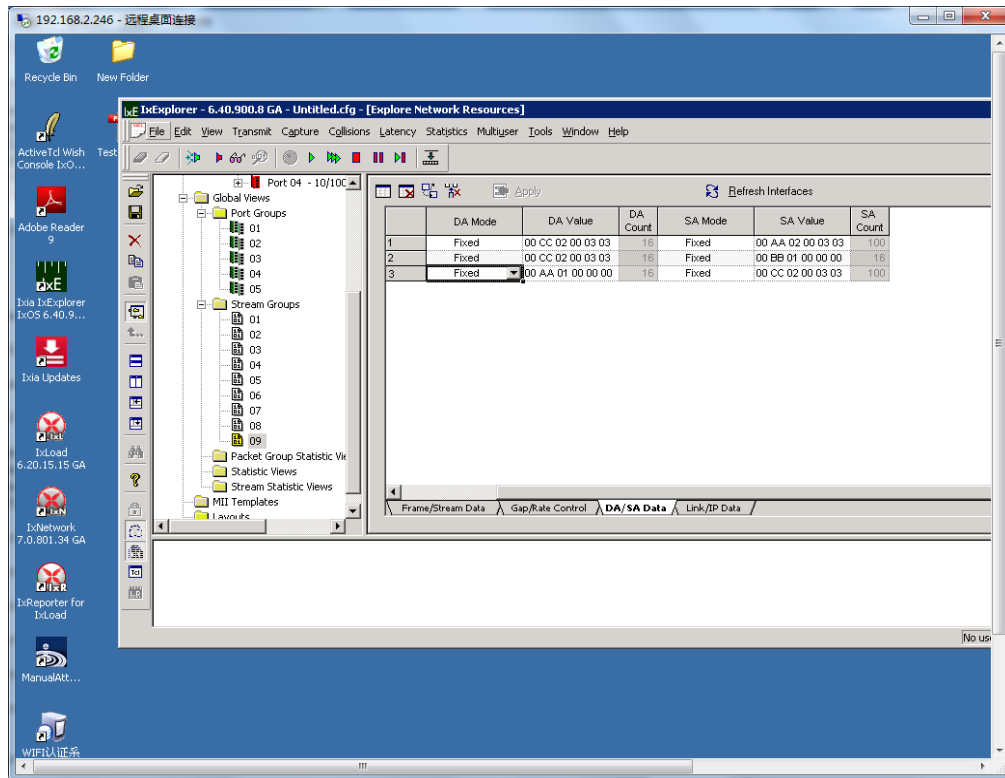

c、 After learning the MAC address, start the packet sending action of 1-2 ports

	A	B	C	D
1	Name	192.168.2.127:03.01	192.168.2.127:03.02	192.168.2.127:03.03
2	Link State	Link Up	Link Up	Link Up
3	Line Speed	1000 Mbps	1000 Mbps	1000 Mbps
4	Duplex Mode	Full	Full	Full
5	Frames Sent	17,329,607	17,328,227	0
6	Frames Sent Rate	1,488,097	1,488,094	0
7	Valid Frames Received	0	0	17,330,697
8	Valid Frames Received Rate	0	0	1,488,133
9	Bytes Sent	1,109,094,848	1,109,006,528	0
10	Bytes Sent Rate	95,238,178	95,238,009	0
11	Bytes Received	0	0	1,109,164,608
12	Bytes Received Rate	0	0	95,240,530
13	Fragments	0	0	0
14	Undersize	0	0	0
15	Oversize and Good CRCs	0	0	0
16	CRC Errors	0	0	0

## (2) Test Results

Result: pass

Capture the packet on port 3 and observe the original MAC address. You can see that the received packet is from the packet with the highest priority queue on port 1.

# Chapter 5 Network Security Commands

## 5.1 Anti-attack

### Command description:

System ignore icmp-echo  
System protection syn-ack  
System rate-limit

### Function Introduction

The anti-attack configuration is used to ignore the ICMP request of the device, defend against the TCP SYN attack to the device, and control the threshold value of the data received by the CPU.

### 5.1.1 System ignore icmp-echo

#### Command description

If you want to ignore ICMP requests destined for this device, you can use this command to configure. Use the no form of this command to cancel this configuration.

System ignore icmp-echo  
No system ignore icmp-echo

Parameter	N/A
Default	N/A
Command mode	Global configuration mode.

**eg.**

Configure to ignore ICMP requests destined for this device.

Switch (config) # system ignore icmp-echo

### 5.1.3 System protection ddos

#### Command description

If you want to defend against ddos attacks on the device, you can configure it through this command. Use the no form of this command to cancel this configuration.

System protection ddos

No system protection ddos

Parameter	N/A
Default	N/A
Command mode	Global mode

**eg.**

Configure defense against ddos attacks on the device

Switch (config) # system protection ddos

### 5.1.3 System rate-limit

#### Command description

If you want to control the threshold of CPU receiving data, you can configure it through this command. Use the no form of this command to cancel this configuration.

System rate-limit value

No system rate-limit

Parameter	parameter	Directions
	value	<0-100000> pps , Default value 0:disable limited。
Default	N/A	
Command mode	Global mode	

**eg.**

Configure the threshold for the CPU to receive data as 1000.

Switch (config) # system rate-limit 1000

Disable the threshold control function of the CPU receiving data

Switch (config) # no system rate-limit

## 5.2 MAC binding

### Command description:

Mac-address static

#### 5.2.1 mac-address static

### Command description

Mac-address static mac-addr vlan vlan-id interface interface-id

No mac-address static mac-addr vlan vlan-id

If you want to add a static MAC address, you can configure it through this command. Use the no form of this command to cancel this configuration.

	Parameter	Directions
Parameter	mac-addr	MAC address. Value range: H.H.H.
	vlan-id	The VLAN to which the MAC address belongs. Value range: 1-4094.
	interface-id	The physical port to which the MAC address belongs.
Default	N/A	
Command mode	Global configuration mode.	

**eg.**

Configure the MAC address 00-00-0 0-00-00-01 to be bound to port G10 belonging to VLAN2.

```
Switch (config) # mac-address static 00-00-00-00-00-01 vlan 2  
interface G10
```

## 5.3 ARP binding

### Command description:

arp

### Function Introduction

In order to better manage the computers in the network, you can use the ARP binding function to control the access (IP binding) between the computers in the network.)

### 5.3.1 arp static

#### Command description

arp static

Parameter	N/A
Default	N/A
Command mode	Global configuration mode

**eg.**

Switch (config) # arp static 192.168.1.1 50-46-5D-E2-D5-50

### 5.3.2 show arp

#### Command description:

View the binding of the arp address

Show arp

Parameter	N/A
Default	N/A
Command mode	Privileged configuration mode

**eg.**

Show ARP binding list

Switch (config) # show arp



## 5.4 ACL config

### Command description:

Mac acl

ip acl

Rule

Ip/mac access-group

### Function Introduction

The Access Control List (ACL) is used to control the data packets entering and leaving the port.

The communication between information points and the communication between internal and external networks are essential business requirements in the enterprise network. In order to ensure the security of the internal network, it is necessary to use security policies to ensure that unauthorized users can only access specific network resources, so as to achieve access to specific network resources. Purpose of control. In short, ACL can filter traffic in the network and is a network technical means to control access. After configuring an ACL, you can restrict network traffic, allow access to specific devices, and specify to forward packets on specific ports, and so on. For example, ACL can be configured to prohibit devices in the LAN from accessing the external public network, or only FTP service can be used. ACLs can be configured on routers or service software with the ACL function.

ACL is an important technology to ensure system security in the Internet of Things. Based on the security of the device hardware layer, it controls the communication between devices at the software layer and uses programmable methods to specify access rules to prevent illegal devices from destroying system security. Get system data.

### 5.4.1 Mac acl

#### Command description

Mac acl <1-99>

No mac acl <1-99>

If you want to add a mac acl group, you can configure it through this command. Use the no form of the command to delete the group.

Parameter	Parameter	Directions
Parameter	<1-99>	mac acl group number, range: 1-99
Default	N/A	
Command mode	Global mode After using this command, you can add a mac acl group	

eg.

Switch (config) #mac acl 1

### 5.4.2 ip acl

#### Command description

ip acl <100-999>

No ip acl <100-999>

If you want to add an ip acl group, you can configure it through this command. Use the no form of the command to delete the group.

Parameter	Parameter	Directions
Parameter	<100-999>	ip acl group number, range: 100-999
Default	N/A	
Command mode	Global mode	

eg.

Switch (config) #ip acl 100

### 5.4.3 Rule

#### Command description

Rule <1-127> deny/permit <source mac> <destination mac> cos <0-7>/vlan <1-4094>/eth\_type ETHTYPE

Rule <1-127> deny/permit icmp/igmp/tcp/udp/ip <source ip> <destination ip> ip\_pri<0-7> / tos\_pri<0-15>/ dscp\_pri<0-63>

No rule! <1-127>

If you want to add an acl rule, you can configure it through this command. Use the no form of the command to delete the group.

	Parameter	Directions
Parameter	<1-127>	Rule number, range: 1-127
	source mac	Source mac address, any means any
	destination mac	Destination mac address, any means any
	1-4094	vlan number, range: 1-4094
	ETHTYPE	Ether type, the range is 0x0000-0xFFFF; 0x0000 or not filled means it does not match the Ether type field,
	source ip	Source IP address, any means any
	destination ip	Destination IP address, any means any
	<0-7>	IP precedence to match, range 0-7
	<0-15>	TOS to match, range 0-15
	<0-63>	DSCP to match, range 0-63
Default	N/A	
Command mode	Global mode After using this command, you can add an acl rule	

eg.

Add a rule 1 of mac acl 1

Switch (config) #mac acl 1

Switch (config-acl-mac) #rule 1 deny any any

#### 5.4.4 ip/mac access-group

##### Command description

ip access-group <100-999>

No ip access-group <100-999>

Mac access-group <1-99>

No mac access-group <1-99>

After using this command, you can bind the acl rules used by the port

	Parameter	Directions
Parameter	<100-999>	ip acl group number, range: 100-999
	<1-99>	mac acl group number, range: 1-99
Default	N/A	
Command mode	Interface mode	

eg.

Switch (config-if) # ip access-group <100-999>

#### 5.5 802.1X config

##### Command description:

Dot1x auth-port system-auth-ctrl

Dot1x initialize interface IFNAME

Dot1x radius-client source-interface HOSTNAME PORT

Dot1x radius-server deadtime MIN

Dot1x radius-server host HOSTNAME auth-port PORTNO key STRING  
retransmit RETRIES timeout SEC

Dot1x re-authenticate interface IFNAME

##### Function Introduction

The 802.1x protocol is an access control and authentication protocol based on Client/Server. It can restrict unauthorized users/devices from accessing LAN/WLAN through the access port. 802.1x authenticates users/devices connected to a switch port before obtaining various services provided by the switch or LAN. Before passing the authentication, 802.1x only allows EAPoL (Extensible Authentication Protocol over Local Area Network) data to pass through the switch port connected to the device; after passing the authentication, normal data can pass through the Ethernet port smoothly.

### 5.5.1 Dot1x auth-port system-auth-ctrl

#### Command description

Dot1x auth-port system-auth-ctrl

No dot1x auth-port system-auth-ctrl

Enable and disable the port-based Dot1x function.

Parameter	N/A
Default	N/A
Command mode	Global mode After using this command, you can enable the 802.1X function, and use the no form of this command to disable this function.

eg.

Switch (config) # dot1x auth-port system-auth-ctrl

### 5.5.2 Dot1x initialize interface IFNAME

#### Command description

Dot1x initialize interface IFNAME

Initializes 802.1X authentication for the port.

Parameter	Parameter	Directions
	IFNAME	Specify the interface name, such as G1, X1, etc.
Default	N/A	
Command mode	Global mode After using this command, the initial session is authenticated, and the connected session will be disconnected.	

eg.

Switch (config) # dot1x initialize interface G1

### 5.5.3 Dot1x radius-client source-interface HOSTNAME PORT

#### Command description

Dot1x radius-client source-interface HOSTNAME PORT

Parameter	Parameter	Directions
	HOSTNAME	RADIUS client (hostname or IP)
	PORT	Client port number (default 1812)
Default	N/A	
Command mode	Global mode After using this command, you can set the IP and port number of the radius client	

**eg.**

```
Switch (config) #dot1x radius-client source-interface  
192.168.200.200 1812
```

### 5.5.4 Dot1x radius-server deadtime MIN

#### Command description

Dot1x radius-server deadtime MIN

Configure the IP address of the accounting server and the IP address and secret key of the backup server

Parameter	Parameter	Directions
	MIN	RADIUS server death time (in minutes) <0-1440>, default is 0
Default	N/A	
Command mode	Global mode After using this command, you can set the death time of the Radius server	

**eg.**

```
Switch (config) # dot1x radius-server deadtime 5
```

### 5.5.5 Dot1x radius-server

#### Command description

Dot1x radius-server host HOSTNAME auth-port PORTNO key STRING  
retransmit RETRIES timeout SEC

Configure the update interval/maintain authentication time of the authentication server.

	Parameter	Directions
Parameter	HOSTNAME	RADIUS server (hostname or IP)
	PORTNO	Radius server port number (default 1812)
	STRING	RADIUS server keystring
	RETRIES	Number of retransmissions (range 1-100)
	SEC	RADIUS server timeout (in seconds) <1-1000>
	Default	N/A
Command mode	Global mode After using this command, you can set the parameters related to the Radius server	

**eg.**

Switch (config) #Dot1x radius-server host 192.168.200.1 auth-port 1812 key 123456 retransmit 3 timeout 5

## 5.5.6 Dot1x re-authenticate

### Command description

Dot1x re-authenticate interface IFNAME

Manually re-authenticate the specified port.

Parameter	IFNAME	Specify the interface name, such as G1, X1, etc.
Default	N/A	
Command mode	Global mode After using this command, re-authenticate the specified port	

**eg.**

Configure re-authentication on port G1

Switch (config) # dot1x re-authenticate interface

## 5.5.7 Dot1x initialize

### Command description

Dot1x initialize

Initialize the specified port, i.e. disable the port and try to re-authenticate

Parameter	N/A	
Default	N/A	
Command mode	Interface mode After using this command, re-authenticate the specified port	

**eg.**

Port G1 initialization

Switch (config) # interface G1

Switch (config-if) # dot1x initialize



### 5.5.8 Dot1x keytxenabled

#### Command description

Dot1x keytxenabled enable/disable

Enable/disable the password transmission switch for the specified port.

Parameter	N/A
Default	N/A
Command mode	Interface mode After using this command, enable the password transmission switch of the specified port

**eg.**

Port G1 initialization

Switch (config) # interface G1

Switch (config-if) # dot1x keytxenabled enable

### 5.5.9 Dot1x port-control

#### Command description

Dot1x port-control auto

Dot1x port-control dir both/in

Dot1x port-control force-authorized

Dot1x port-control unforce-authorized

Configure the authentication mode of the specified port

Parameter	N/A
Default	N/A
Command mode	Interface mode Use this command to set the authentication mode of the specified port

**eg.**

Configure the G1 port authentication mode to be automatic and the control direction to be bidirectional

Switch (config) # interface G1

Switch (config-if) # dot1x port-control auto

Switch (config-if) # dot1x port-control dir both

### 5.5.10 dot1x protocol-version

#### Command description

Dot1x protocol-version 1/2

Configure the authentication protocol version of the specified port, the default is 2.

Parameter	N/A
Default	N/A
Command mode	Interface mode Use this command to set the authentication protocol version of the specified port

**eg.**

Configure the G1 port authentication protocol version to 1

Switch (config) # interface G1

Switch (config-if) #dot1x protocol-version 1

### 5.5.11 dot1x quiet-period

#### Command description

Dot1x quiet-period <1-65535>

The time to be in the N/A prompt state after the authentication fails, the default is 60s

Parameter	N/A
Default	N/A
Command mode	Interface mode Use this command to set the time in the N/A prompt state after authentication failure

**eg.**

Configure the silent time of the G1 port to 60s

Switch (config) # interface G1

Switch (config-if) #dot1x quiet-period 60

### 5.5.12 dot1x re-authenticate

#### Command description

Dot1x re-authenticate

Re-authenticate the specified port.

Parameter	N/A
Default	N/A
Command mode	Interface mode Use this command to re-authenticate the specified port

**eg.**

Configure G1 re-authentication

```
Switch (config) # interface G1
```

```
Switch (config-if) #dot1x re-authenticate
```

### 5.5.13 dot1x reauthMax

#### Command description

Dot1x reauthMax <1-10>

Number of reauthentication attempts before authorization (default 2).

Parameter	N/A
Default	N/A
Command mode	Interface mode Use this command to set the number of re-authentication attempts before the specified port is unauthorized

**eg.**

Configure the number of re-authentications for G1 to 5

```
Switch (config) # interface G1
```

```
Switch (config-if) #dot1x reauthMax 5
```

### 5.5.14 dot1x reauthentication

#### Command description

Dot1x reauthentication

To enable re-authentication on the specified port, add the no command in front to disable it.

Parameter	N/A
Default	N/A
Command mode	Interface mode Use this command to set the specified port re-authentication switch

**eg.**

Enable G1 re-authentication

Switch (config) # interface G1

Switch (config-if) #dot1x reauthentication

### 5.5.15 dot1x timeout

#### Command description

Dot1x timeout re-authperiod <1-4294967295>

Seconds between reauthorization attempts (default 3600 seconds)

Dot1x timeout server-timeout <1-65535>

Authentication server response timeout (default 30 seconds)

Dot1x timeout supp-timeout <1-65535>

Requester response timeout (default 30 seconds)

Dot1x timeout tx-period <1-65535>

The number of seconds between consecutive request id attempts (default 30 seconds)

Parameter	N/A
Default	N/A
Command mode	Interface mode Use this command to set the timeout period

**eg.**

N/A

## 5.6 Port isolation

### Command description

Switchport protected

### Function Introduction

Port isolation is to achieve Layer 2 isolation between packets. Different ports can be added to different VLANs, but limited VLAN resources will be wasted. With the port isolation feature, isolation between ports in the same VLAN can be achieved. Users only need to add ports to the isolation group to achieve Layer 2 data isolation between ports in the isolation group. The port isolation function provides users with a safer and more flexible networking solution.

### 5.6.1 Switchport protected

#### Command description

Switchport protected

No switchport protected

If you want to configure port isolation, you can configure it through this command. Use the no form of this command to cancel this configuration.

Parameter	N/A
Default	N/A

**eg.**

Configure G1 port isolation.

Switch (config) # interface G1

Switch (config-if) # switchport protected

## 5.7 Storm control

### Command description:

Storm-control broadcast pps

Storm-control multicast pps

Storm-control unicast pps

### Function Introduction

Storm suppression means that users can limit the amount of broadcast traffic that is allowed to be received on a port. When this type of traffic exceeds the threshold set by the user, the system will discard the data frames that exceed the traffic limit to prevent the occurrence of storms and ensure the normal operation of the network.

### 5.7.1 storm-control broadcast pps

#### Command description

Storm-control broadcast pps vlaue

No storm-control broadcast

If you want to suppress the broadcast packets of the port, you can use this command to configure. Use the no form of this command to cancel this configuration.

	Parameter	Directions
Parameter	Value	Value range: 0-1000000 unit pps, the default value is 0, which means no suppression.
Default	N/A	
Command mode	Interface mode	

**eg.**

Suppress the rate of broadcast packets on port G1 to 1000pps.

```
Switch (config) # interface G1
```

```
Switch (config-if) # storm-control broadcast pps 1000
```

## 5.7.2 storm-control multicast pps

### Command description

Storm-control multicast pps vlaue

No storm-control multicast

If you want to suppress the multicast packets of the port, you can use this command to configure. Use the no form of this command to cancel this configuration.

Parameter	Parameter	Directions
Parameter	value	Value range: 0-1000000 unit pps, the default value is 0, which means no suppression.
Default	N/A	
Command mode	Interface mode	

**eg.**

Suppress the rate of multicast packets on port G1 to 1000pps.

```
Switch (config) # interface G1
```

```
Switch (config-if) # storm-control multicast pps 1000
```

## 5.7.3 storm-control unicast pps

### Command description

Storm-control unicast pps vlaue

No storm-control unicast

If you want to suppress the unicast packets of the port, you can use this command to configure. Use the no form of this command to cancel this configuration.

Parameter	Parameter	Directions
Parameter	value	Value range: 0-1000000 unit pps, the default value is 0, which means no suppression.
Default	N/A	
Command mode	Interface mode	

**eg.**

Value range: 0-1000000 unit pps, the default value is 0, which means no suppression.

```
Switch (config) # interface G1
```

```
Switch (config-if) # storm-control unicast pps 1000
```

## 5.8 ERPS config

### Function Introduction

ERPS (Ethernet Ring Protection Switching): Ethernet multi-ring protection technology, the protocol standard is the ITU-TG.8032 multi-ring standard. ERPS pursues higher performance and more security, which is the permanent development direction of the network. The Ethernet ring network technology has become an important redundancy protection method in the Layer 2 network. In the Layer 2 network, the STP protocol is generally used for network reliability, as well as the loop protection protocol mentioned in the previous section. The STP protocol is a standard ring network protection protocol developed by IEEE and has been widely used. The application is limited by the size of the network, and the convergence time is affected by the network topology. Generally, the convergence time of STP is in the second level. When the network diameter is large, the convergence time is longer. Although RSTP/MSTP can reduce the convergence time to the millisecond level, it still cannot meet the requirements for services with high service quality requirements such as 3G/NGN voice. In order to shorten the convergence time and eliminate the influence of network size, the ERPS protocol came into being. ERPS is a link layer protocol specially applied to the Ethernet ring. It can prevent the broadcast storm caused by the data loop in the Ethernet ring; when a link on the Ethernet ring is disconnected, it can quickly enable the backup link to Communication between nodes on the ring network is restored. Compared with the STP protocol, the ERPS protocol has the characteristics of fast topology convergence speed (less than 20ms) and the convergence time is related to the number of nodes on the ring N/A.



## 5.8.1 erps

### Command description

Erps enable/disable

Parameter	N/A
Default	Disable
Command mode	Global mode After using this command, you can perform Global mode on erps

eg.

Switch (config) # erps enable

Switch (config) # erps disable

## 5.8.2 erps xx

### Command description

erps physical-ring Ring ID east-interface PORT(A) west-interface PORT(B)

erps instance Instance ID

Ring type major-ring/sub-ring

Raps-cannel-vlan VLAN ID

Node-role owner/neighbour/normal/interconnection

Data-traffic-vlan reference-stg STG ID


Parameter	Parameter	Directions
	Ring ID	1-255
	PORT(A)	any port
	PORT(B)	Except for the ports filled in above
	Instance ID	1-64
	VLAN ID	Protocol vlan, range 2-4094, cannot be duplicated with business vlan
	node-role	There is one and only one Owner node in an ERPS ring
	STG ID	business vlan instance
Default	Dsiable	
Command mode	Global mode	

### 5.8.3 Example

Three devices group erps ring, set G1 on sw1 as the main port (responsible for controlling the forwarding state, that is, this port will be blocked when there is a loop)

During the loop, pc1 and pc2 access normally

When other links other than the link where the blocked port is located fails, erps can achieve faster switching

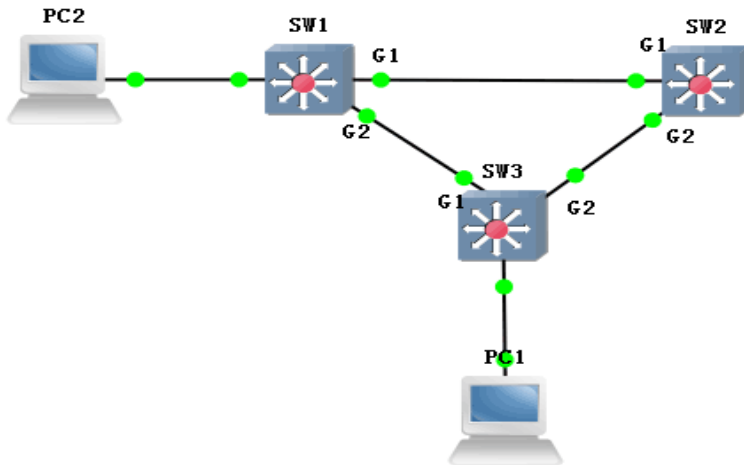

**sw1: switch(config)#erps enable**

```
Switch (config) #erps physical-ring 1 east-interface G1 west-interface G2
```

```
Switch (config) #erps instance 1
```

```
Switch (config-erps-instance) #physical-ring 1
```

```
Switch (config-erps-instance) #ring-type major-ring
```

```
Switch (config-erps-instance) #node-role owner east-interface
```

```
Switch (config-erps-instance) #raps-channel-vlan 3001
```

```
Switch (config-erps-instance) #data-traffic-vlan reference-stg 0
```

```
Switch (config-erps-instance) #erps enable
```

**sw2/sw3: switch(config)#erps enable**

```
Switch (config) #erps physical-ring 1 east-interface G1 west-interface G2
```

```
Switch (config) #erps instance 1
```

```
Switch (config-erps-instance) #physical-ring 1
```

```
Switch (config-erps-instance) #ring-type major-ring
```

```
Switch (config-erps-instance) #node-role normal
```

```
Switch (config-erps-instance) #raps-channel-vlan 3001
```


```
Switch (config-erps-instance) #data-traffic-vlan reference-stg 0
```

```
Switch (config-erps-instance) #erps enable
```

## Phenomenon


Block G1 port on SW1

pc1 (192.168.222.107) ping pc2 (192.168.222.95)

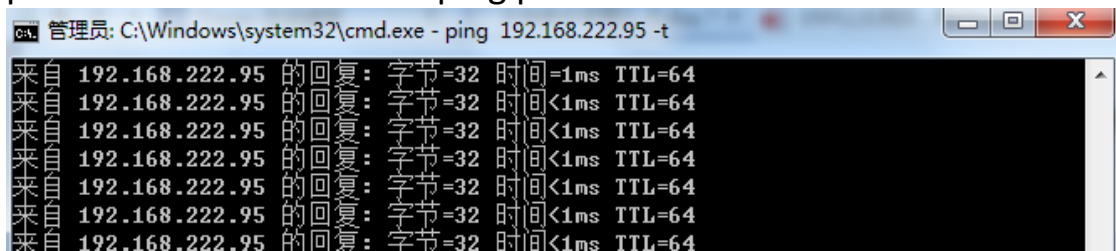

```
管理员: C:\Windows\system32\cmd.exe - ping 192.168.222.95 -t
来自 192.168.222.95 的回复: 字节=32 时间=1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
```

Manually cut off the link other than the link where the blocked port is located, which can realize fast switchover without interruption of ping

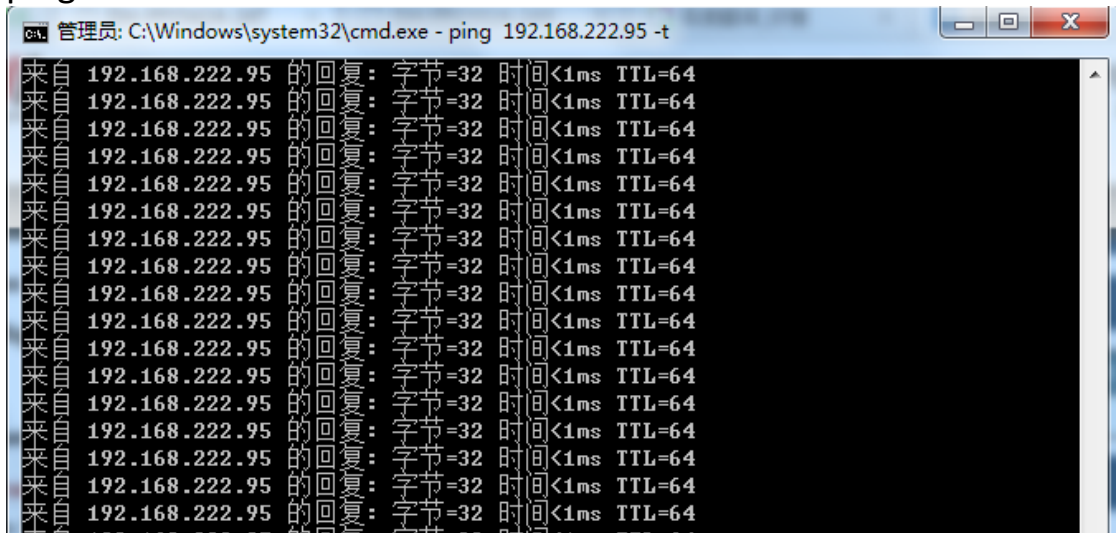

```
管理员: C:\Windows\system32\cmd.exe - ping 192.168.222.95 -t
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
来自 192.168.222.95 的回复: 字节=32 时间<1ms TTL=64
```

## 5.9 IP source guard

### Command description:

```
ip source-guard  
ip source-guard trust<0/1/2/3>  
ip dhcp-snooping binding
```

### Function Introduction

Through the IP source protection function, you can filter and control the packets forwarded by the port to prevent illegal packets from passing through the port, thereby restricting the illegal use of network resources (such as illegal hosts imitating legitimate users' IP access to the network), and improving the port's security. Safety. If the port of the switch is configured with IP source protection, when a packet arrives at the port, the device will check the IP source protection entry, and the packet that conforms to the entry can be forwarded or enter the subsequent process, and the packet that does not conform to the entry can be forwarded. Will be discarded. The binding function is for ports. After a port is bound, only the port is restricted, and other ports are not affected by the binding.

### 5.9.1 ip source-guard

#### Command description

```
ip source-guard
```

```
No ip source-guard
```

Configure to enable IP source protection function, use the no form of this command to disable this function

Parameter	N/A
Default	Disable
Command mode	Global mode After using this command, you can enable the IP source protection function

eg.

```
Switch (config) #Ip source-guard
```

## 5.9.2 ip source-guard trust

### Command description

ip source-guard trust<0/1/2/3>

No ip ip source-guard trust

	Parameter	Directions
Parameter	0/1/2/3	The maximum number of dynamic clients is 0/1/2, 3 means N/A limit
Default	Disable	
Command mode	Interface mode After using this command, you can enable the port IP source protection function, and use the no form of this command to restore the default value of the port.	

**eg.**

Switch (config-if) #Ip source-guard trust 1

### 5.9.3 ip dhcp-snooping binding

#### Command description

ip dhcp-snooping binding <MAC> vlan <VLANID> ip <A.B.C.D>  
mask <Msak> interface <IFNAME>

No ip dhcp-snooping binding <MAC> vlan <VLANID> ip <A.B.C.D>  
interface <IFNAME>

	Parameter	Directions
Parameter	MAC	Statically bound MAC address
	VLANID	Statically bound VLAN number
	A.B.C.D	Statically bound IP address
	Msak	The mask of the statically bound IP address
	IFNAME	The port number
	Default	N/A
Command mode	User mode After using this command, you can enable the IP source protection static binding function, and use the no form of this command to release the binding.	

**eg.**

```
Switch (config) #ip dhcp-snooping binding 40-50-11-11-11-11 vlan 1  
ip 192.168.1.1 mask 255.255.255.0 interface G1
```

# Chapter 6 Network Management Commands

## 6.1 HTTP config

### Command description:

ip http-server http

ip http-server https

Function Introduction

HTTP configuration commands are described. This command can configure the switch to accept HTTP/HTTPS service requests on the specified port, process the request and return the processing result to the browser

### 6.1.1 ip http-server http

#### Command description

ip http-server http

No ip http-server

If you want to start the switch http service, you can configure it through this command. Use the no form of this command to cancel this configuration, and use the N/A method to manage the switch in http mode.

Parameter	N/A
Default	N/A
Command mode	Global configuration mode

**eg.**

Start the switch http service.

Switch (config) # ip http-server http

## 6.1.2 ip http-server https

### Command description

ip http-server https

No ip http-server

If you want to start the switch https service, you can configure it through this command. Use the no form of this command to cancel this configuration and use the N/A method to manage the switch in https mode.

Parameter	N/A
Default	N/A
Command mode	Global configuration mode

**eg.**

Enable the switch https service.

Switch (config) # ip http-server https

## 6.2 SNMP config

### Command description:

Community

syscontact

syslocation

sysname

Trap

trap2sink

trapsink

User

### Function Introduction

Simple Network Management Protocol (SNMP) consists of a set of network management standards, including an application layer protocol, a database schema and a set of data objects. This protocol enables network management systems to monitor devices connected to the network for any management concerns. This protocol is part of the internet protocol suite defined by the Internet Engineering Task Force (IETF).



## 6.2.1 snmp

### Command description

snmp

No snmp

If you want to enable the snmp function, you can configure it through this command. Use the no form of the command to disable this feature.

Parameter	N/A
Default	Enable
Command mode	Global mode

**eg.**

Enable the switch snmp function.

Switch (config) # snmp

## 6.2.2 snmp-server trap2sink

### Command description

Snmp-server trap2sink ip

Snmp-server trapsink ip

Select the version of snmp and the configuration of the receiving address, which can be configured by this command.

Parameter	N/A
Default	snmp
Command mode	Global mode

**eg.**

Configure the SNMP protocol version of the switch.

Switch (config) # snmp-server trap2sink 192.168.1.1

### 6.2.3 snmp-server trap

#### Command description

Snmp-server trap

No snmp-server trap

Enable/disable snmp trap function.

Parameter	N/A
Default	Disable
Command mode	Global mode

eg.

Switch (config) # snmp-server trap

### 6.2.4 snmp-server community

#### Command description

Community // Set the authentication name and permissions

Parameter	ro; read only
	rw: read and write
Default	Public
Command mode	Global mode

eg.

Configure the switch

Switch (config) #snmp-server community ro 111

// the authentication name is 111, and the permission is read-only

### 6.2.5 snmp host

#### Command description

Snmp-server sysname

// set hostname

Parameter	N/A
Default	N/A
Command mode	Global mode

eg.

Switch (config) #snmp-server sysname 1111

//the hostname is 1111

## 6.2.6 snmp-server user

### Command description

Snmp-server


Parameter	N/A
Default	N/A
Command mode	Global mode

eg.

Switch (config) #snmp-server user ro 111

## 6.2.7 Example

The switch enables snmp, and the MIB Browser is installed on pc1 to obtain the switch node information

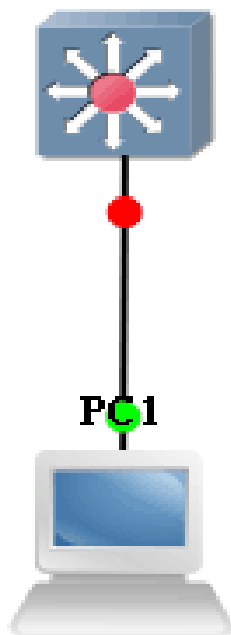

**Sw: switch (config) # snmp-server**

Switch (config) #snmp-server version v2c

Switch (config) #snmp-server community v2c 123 RO

Switch (config) #snmp-server community v2c 123 RW

//snmp version and read-write community configuration


Switch (config) # snmp-server host AA

Switch (config-snmps-host) # no shutdown


Switch (config-snmps-host) # host 192.168.222.107

// snmp trap information configuration


Pc: Open MIB Browser on the PC, and add the switch ip with the corresponding community name

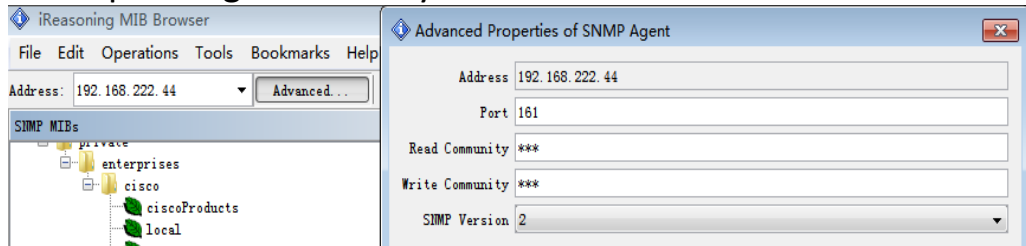

Right-click iso.org.dod.internet, click work, and relevant information will be displayed on the information display page.

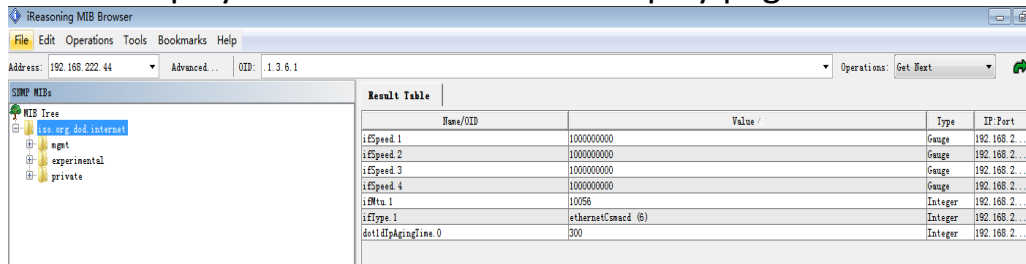

Click trap receive under tools to view the uploaded trap information

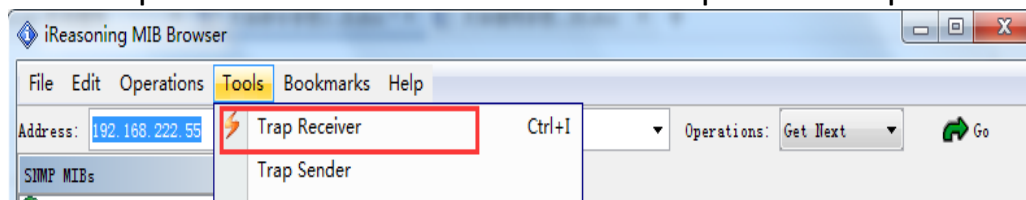

# Chapter 7 System Maintenance

## Commands

### 7.1 Reboot

#### Command description

If you want to restart the device, you can configure it through this command.

Reboot

Parameter	N/A
Default	N/A
Command mode	Privileged mode

**eg.**

Reboot the device after saving the configuration.

```
Switch# system config save
```

```
Switch# reboot
```

### 7.2 System config restore

#### Command description

If you want to restore the switch to factory settings, you can use this command to configure it, and it will take effect after restarting.

Parameter	N/A
Default	N/A
Command mode	Privileged mode

**eg.**

It will take effect after restoring the factory configuration and restarting.

```
Switch# system config restore
```

```
swtich# reboot
```

## 7.3 System config save

### Command description

If you want to save the configuration of the switch, you can configure it through this command.

Parameter	N/A
Default	N/A
Command mode	Privileged mode

**eg.**

Save switch configuration

```
Switch# system config save
```

## 7.4 PING test

### Function Introduction

PING (Packet Internet Groper), Internet Packet Explorer, a program for testing the amount of network connections. Ping sends an ICMP (Internet Control Messages Protocol), that is, the Internet Message Control Protocol; the echo request message is sent to the destination and reports whether the desired ICMP echo (ICMP echo response) is received. It is a command used to check whether the network is smooth or the speed of the network connection.

### Command description

Ping ip

Test reachability with the host.

Parameter	N/A
Default	N/A
Command mode	Privileged mode

**eg.**

Test the reachability of switches and hosts

```
Switch # ping 192.168.1.100
```

Hereby Assmann Electronic GmbH, declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below mentioned manufacturer address

[www.assmann.com](http://www.assmann.com)  
ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
58513 Lüdenscheid, Germany

