

10/100/1000Base-T to 1000Base-SX/LX Gigabit Media Converter



For the flexibility with all kind 10/100/1000Mbps Ethernet Media on RJ-45 port and high stable Gigabit fiber performance. Planet release the GT-802, GT-802S, GT-805A and GT-806A/B series of Media Converters supports conversion between 10/100/1000Base-T and 1000Base-LX/SX network, there are SC/SFP/WDM connectors with single-mode or multi-mode media as required. The Ethernet signal allows three types of segments to connect easily, efficiently and inexpensively.

To centralize the fiber-optic network installation, the GT-80X with compact design can be used as standalone unit as well as being installed to the media chassis such as the PLANET MC-700/MC-1000R/MC-1500, 7/10/15-slot Media Converter Chassis. These media chassis can assist in producing the power for GT-80X to maintain the fiber-optic network at one location.

As the Gigabit Media Converter fully complies with IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T and IEEE 802.3z 1000Base-LX/SX, the Gigabit media conversion installation is quite quick and easy by simple plugging and playing feature. The GT-80x also supports flow control and back pressure in half-duplex to eliminate packets loss.

KEY FEATURE


- Complies with IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-SX/LX
- TP port supports 10/100/1000Base-T auto-negotiation and auto-MDI/MDI-X
- 1000Base-SX: 50/125 μ m or 62.5/125 μ m multi-mode fiber cable, up to 220/550m (GT-802)
- 1000Base-LX: 9/125 μ m single-mode cable provides long distance for 10km (GT-802S)
- 1000Base-LX WDM interface for up to 15km (single-mode fiber 9/125 μ m) on GT-806A15/B15
- 1000Base-LX WDM interface for up to 60km (single-mode fiber 9/125 μ m) on GT-806A60/B60
- 1000Base-T: 4-pair Cat. 5e/6 UTP cable, up to 100 meters
- Layer 2 key Feature:
 - IEEE 802.3x Full-Duplex Flow-Control and Back-Pressure in Half-Duplex eliminate the loss of packets
 - Support auto MDI/MDI-X function
 - Store-and-Forward mechanism
 - Non-blocking full wire-speed forwarding rate
- Media conversion between 10/100/1000Base-T and 1000Base-SX/LX
- Fiber media allows:
 - Multi-mode fiber using SC/LC/WDM connector
 - Single-mode fiber using SC/LC/WDM connector
- Compact size for working with PLANET MC family Media Chassis (MC-700/MC-1000R/MC-1500)
- Wall-mountable design
- LED indicators for easy network diagnose
- Compact in size, easy installation
- Choice of fiber-connector from SC, LC and WDM, multi-mode / single-mode fiber for 1000Base SFP interface


SPECIFICATION
Product Gigabit Ethernet Media Converter

Model	GT-802	GT-802S	GT-805A	GT-806A15	GT-806B15	GT-806A60	GT-806B60
Hardware Specification							
Standards	IEEE 802.3, 10Base-T IEEE 802.3u, 100Base-TX IEEE 802.3ab, 1000Base-T IEEE 802.3z, 1000Base-SX/LX						
Ports	1 x 10/100/1000Base-T port, 1 x 1000Base-SX/LX port						
Copper Interface	RJ-45 port (Auto-MDI/MDI-X) Twisted Pair						
Optic Interface	SC		SFP		WDM		
Optic Wavelength	850nm	1310nm	-	TX:1310nm	TX:1550nm	TX:1310nm	TX:1550nm
Speed	Twisted-pair			RX:1550nm	RX:1310nm	RX:1550nm	RX:1310nm
	Fiber-optic	10/20Mbps for Half/Full-Duplex, 100/200Mbps for Half/Full Duplex , 2000Mbps for Full-Duplex 2000Mbps for Full-Duplex					
Cable	Twisted-pair	10Base-T: 2-pair UTP Cat. 3,4,5, up to 100 m 100Base-TX: 2-pair UTP Cat. 5, up to 100 m 1000Base-T: 4-pair STP Cat 5 up to 100m					
	Fiber-optic Cable	<ul style="list-style-type: none"> • 50/125µm or 62.5/125µm multi-mode fiber cable, up to 220/550m. • 9/125µm single-mode cable, provides long distance for 10/15/20/30/40/50/60/70/120km (very on fiber transceiver or SFP module) 					
LED Indicator	PWR TP LINK/ACT, 1000 Fiber LINK/ACT						
Power Consumption	5.6 Watts/ 19 BTU (maximum)						
Power Input	DC 5V/2A						
Dimensions (W x D xH)	26 x 70 x 97 mm						
Operator Environment	Operating temperature: 0 to 50 degree C; Humidity: 5~90% non-condensing						
Storage Environment	storage temperature: -40 to 70 degree C; Humidity: 5~90% non-condensing						
Emissions	FCC Class A, CE Class A						

APPLICATIONS
Fiber-optic Networking for ISP, enterprise, and home

With high performance of data transmission and easy installation, the GT-80x can build the ISP network solution of FTTH (Fiber to the Home) or FTTC (Fiber to the Curb) for ISPs and FTTB (Fiber to the Building), also for small office network environment of enterprises.

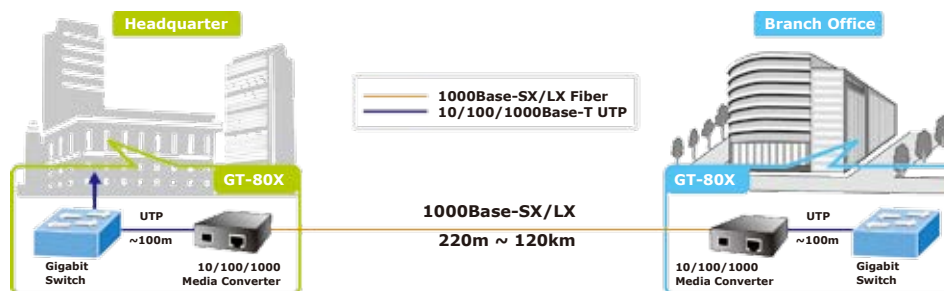

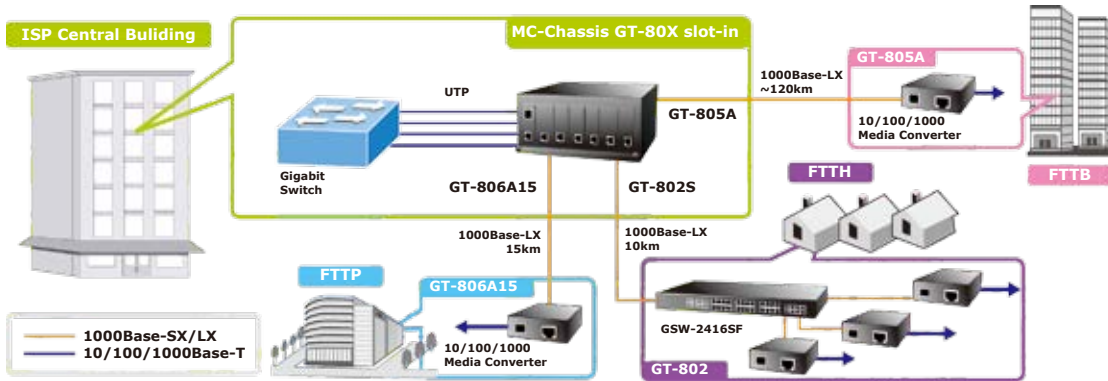

ORDERING INFORMATION

GT-802	10/100/1000Base-T to 1000Base-SX Media Converter (SC,MM)-220/550m
GT-802S	10/100/1000Base-T to 1000Base-LX Media Converter (SC,SM)-10km
GT-805A	10/100/1000Base-T to 1000Base-SX/LX Media Converter (mini-GBIC, SFP)-distance depend on SFP module
GT-806A15	10/100/1000Base-T to 1000Base-LX (WDM) Media Converter TX:1310nm~15km
GT-806B15	10/100/1000Base-T to 1000Base-LX (WDM) Media Converter TX:1550nm~15km
GT-806A60	10/100/1000Base-T to 1000Base-LX (WDM) Media Converter TX:1310nm~60km
GT-806B60	10/100/1000Base-T to 1000Base-LX (WDM) Media Converter TX:1550nm~60km

Related SFP modules for GT-805A

MGB-SX	SFP-Port 1000Base-SX Transceiver, LC, MM-550m
MGB-LX	SFP-Port 1000Base-LX Transceiver, LC, SM-10km
MGB-L30	SFP-Port 1000Base-LX Transceiver, LC, SM-30km
MGB-L50	SFP-Port 1000Base-LX Transceiver, LC, SM-50km
MGB-L70	SFP-Port 1000Base-LX Transceiver, LC, SM-70km
MGB-L120	SFP-Port 1000Base-LX Transceiver, LC, SM-120km
MGB-LA10	1000Base-LX Transceiver, LC, WDM (TX:1310nm) SM-10km
MGB-LB10	1000Base-LX Transceiver, LC, WDM (TX:1550nm) SM-10km
MGB-LA20	1000Base-LX Transceiver, LC, WDM (TX:1310nm) SM-20km
MGB-LB20	1000Base-LX Transceiver, LC, WDM (TX:1550nm) SM-20km
MGB-LA40	1000Base-LX Transceiver, LC, WDM (TX:1310nm) SM-40km
MGB-LB40	1000Base-LX Transceiver, LC, WDM (TX:1550nm) SM-40km
MGB-GT	SFP-Port 1000Base-T mini-GBIC module