

## 10GBASE-LR/SR/BX/T Modules



The PLANET MTB family of 10G SFP+ fiber optic module that is designed to work with PLANET products with 10G SFP+ interface provides a high-performance 10G Ethernet network for enterprises, telecoms and ISPs. The MTB family is also well applicable for data center cloud computing. The deployment distance can be extended from 300 meters (multi-mode, LC), to up to 60 kilometers (single-mode, LC).

To meet the increasing demand of the Industrial Ethernet fiber solution, PLANET has released the MTB-T series 10GBASE-SR/LR/BX transceivers that can operate reliably in an electrically harsh, climatically demanding, and -40 to 75 degrees C operating temperature environment. The MTB-T series 10GBASE-SR/LR/BX transceivers are definitely easier and faster to connect than the 1000BASE-SX/LX/BX counterpart.

The 10GBASE-T SFP+ Copper Transceiver is specifically designed for high-speed communication links that require 10 gigabit Ethernet over Cat 6a/7 cable. It is the first SFP+ transceiver that offers 10Gb/s communication over fiber optic media.

Interoperability with legacy Ethernet equipment via auto-negotiation is of particular significance as it enables data center to expand without added expenses. The added benefit is that it provides backward compatibility with legacy networks by adopting standard-based technology of the familiar RJ45 connector.

### Product Features

- Complies with the IEEE 802.3ae 10 Gigabit Ethernet Standard
- Compact RJ45 connector assembly
- SFP+ multi-source agreement compliant
- SFF-8472 diagnostic monitoring interface for optical transceivers
- For established fiber link distance up to 300m over 50/125µm multi-mode fiber cable
- For established fiber link distance up to 60km over 9/125µm single-mode fiber cable
- 10 Gigabit Ethernet over Cat6a/Cat7 cable
- Cost-effective at up to 30m distance on UTP cables
- Plug and Play Installation


## Applications

### Applying 10Gbps SFP+ with 10G PCI Express Server Adapter (ENW-9801)

The 10GBASE-LR/SR/BX/T mini-GBIC module can be installed into PLANET products with 10G SFP+ interface like PLANET ENW-9801 PCI-e NIC card. The 10G SFP+ slots of the ENW-9801 are hot-pluggable and hot-swappable. With the ENW-9801 installed in the PC, you can plug and pull out the 10GBASE-LR/SR/BX/T mini-GBIC module in and from the 10G SFP+ slot of the ENW-9801, respectively, without having to power off the PC.



The MTB-T series 10GBASE-SR/LR/BX transceiver is an ideal solution for -40 to 75 degrees C wide temperature industrial equipment with 10GBASE-SR/LR/BX SFP interfaces. The deployment distance can be extended from 300m (multi-mode, LC) to 10/20/40/60 kilometers (single-mode, LC).

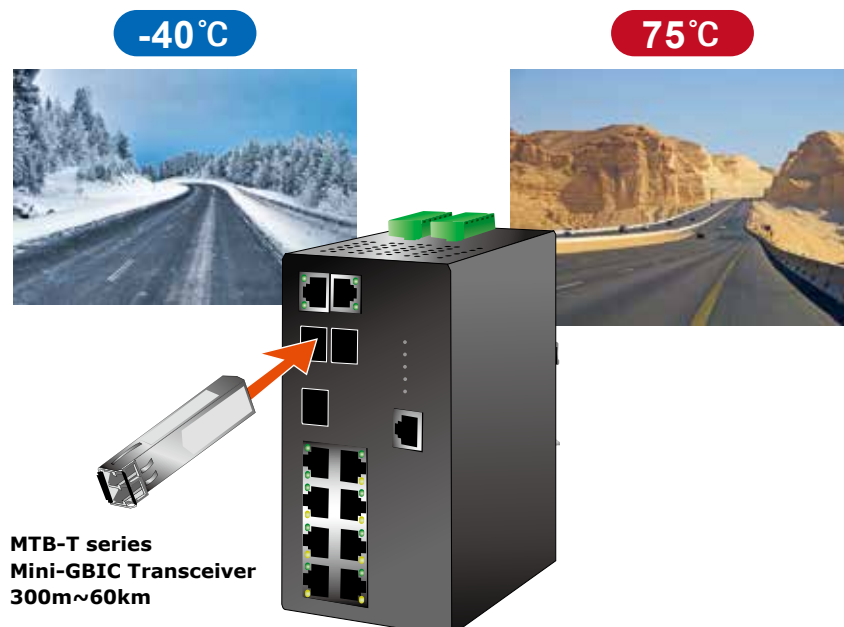

## Specifications

MTB-RJ	
Package	SFP+
PHY Type	IEEE 802.3an 10 Gigabit Ethernet Standard
Fiber Type	--
Connector	Copper
Wavelength	--
Maximum Distance	30m
Operating Temperature	0~70 degrees C
MTB-LR	
Package	SFP+
PHY Type	IEEE 802.3ae 10 Gigabit Ethernet Standard
Fiber Type	Single-mode
Connector	LC
Wavelength	1310nm
Maximum Distance	10km
Operating Temperature	0~60 degrees C
MTB-SR	
Package	SFP+
PHY Type	IEEE 802.3ae 10 Gigabit Ethernet Standard
Fiber Type	Multi-mode
Connector	LC
Wavelength	850nm
Maximum Distance	300m
Operating Temperature	0~60 degrees C
MTB-LA20	
Package	SFP+
PHY Type	IEEE 802.3ae 10 Gigabit Ethernet Standard
Fiber Type	Single-mode
Connector	LC
Wavelength	TX: 1270nm RX: 1330nm
Maximum Distance	20km
Operating Temperature	0~60 degrees C
MTB-LB20	
Package	SFP+
PHY Type	IEEE 802.3ae 10 Gigabit Ethernet Standard
Fiber Type	Single-mode
Connector	LC
Wavelength	TX: 1330nm RX: 1270nm
Maximum Distance	20km
Operating Temperature	0~60 degrees C
MTB-LA40	
Package	SFP+
PHY Type	IEEE 802.3ae 10 Gigabit Ethernet Standard
Fiber Type	Single-mode
Connector	LC
Wavelength	TX: 1270nm RX: 1330nm
Maximum Distance	40km
Operating Temperature	0~60 degrees C
MTB-LB40	
Package	SFP+
PHY Type	IEEE 802.3ae 10 Gigabit Ethernet Standard
Fiber Type	Single-mode
Connector	LC
Wavelength	TX: 1330nm RX: 1270nm
Maximum Distance	40km
Operating Temperature	0~60 degrees C

## MTB-LA60

Package	SFP+
PHY Type	IEEE 802.3ae 10 Gigabit Ethernet Standard
Fiber Type	Single-mode
Connector	LC
Wavelength	TX: 1270nm RX: 1330nm
Maximum Distance	60km
Operating Temperature	0~60 degrees C

## MTB-LB60

Package	SFP+
PHY Type	IEEE 802.3ae 10 Gigabit Ethernet Standard
Fiber Type	Single-mode
Connector	LC
Wavelength	TX: 1330nm RX: 1270nm
Maximum Distance	60km
Operating Temperature	0~60 degrees C

## MTB-TLR

Package	SFP+
PHY Type	IEEE 802.3ae 10 Gigabit Ethernet Standard
Fiber Type	Single-mode
Connector	LC
Wavelength	1310nm
Maximum Distance	10km
Operating Temperature	-40~75 degrees C

## MTB-TSR

Package	SFP+
PHY Type	IEEE 802.3ae 10 Gigabit Ethernet Standard
Fiber Type	Multi-mode
Connector	LC
Wavelength	850nm
Maximum Distance	300m
Operating Temperature	-40~75 degrees C

## Ordering Information

MTB-RJ	1-Port 10GBASE-T SFP+ Copper Fiber Optic Module - 30m
MTB-LR	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 10km
MTB-SR	1-Port 10GBASE-SR SFP+ Fiber Optic Module - 300m
MTB-TLR	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 10km (-40~75 degrees C)
MTB-TSR	1-Port 10GBASE-SR SFP+ Fiber Optic Module - 300m (-40~75 degrees C)
MTB-LA20	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 20km (TX:1270nm RX:1330nm)
MTB-LB20	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 20km (TX:1330nm RX:1270nm)
MTB-LA40	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 40km (TX:1270nm RX:1330nm)
MTB-LB40	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 40km (TX:1330nm RX:1270nm)
MTB-LA60	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 60km (TX:1270nm RX:1330nm)
MTB-LB60	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 60km (TX:1330nm RX:1270nm)

### PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)

Tel: 886-2-2219-9518

Email: sales@planet.com.tw

Fax: 886-2-2219-9528

www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2018 PLANET Technology Corp. All rights reserved.

### MTB-Series 10G Module