

LANmark-6A Cable

LANMARK-6A FFTP AWG23 CAT 6A LSZH DCA S2 D1 A1 ORANGE 500M REEL

Aginode Ref: N100.654G-OD

- Innovative aluminium foil design combining global and individual pair shielding
- Full compliance to latest standards for Category 6A and Class EA
- Guaranteed performance up to 500MHz
- Ideal cable for 10GBase-T application
- Alien Crosstalk immunity

Application

LANmark-6A cables are the ideal solution for a 10G Ethernet network. The range has been designed specifically to support the higher frequencies required for 10 Gigabit Ethernet, while maintaining full backwards compatibility with today's needs. All LANmark-6A cables are shielded, in order to ensure immunity to Alien Crosstalk and other external interferences.


- 10Base-T Ethernet
- 100Base-TX Fast Ethernet
- 1000Base-TX Gigabit Ethernet
- 2.5GBase-T 2.5 Gigabit Ethernet
- 5GBase-T 5 Gigabit Ethernet
- 10GBase-T 10 Gigabit Ethernet
- future Cat 6A and Class EA applications
- PoE++ Type 4 (IEEE 802.3bt)

Design

LANmark-6A FFTP cables feature an ingenious metal foil construction forming a central cross and shaped around each pair, acting as global screen and individual pair shielding at the same time. Compared to traditional F/FTP and S/FTP cables, this clever design facilitates fast and easy cable preparing whilst offering outstanding electrical performance.

Performance

With guaranteed performance to 500MHz, LANmark-6A FFTP cables exceed the requirements of the International, European

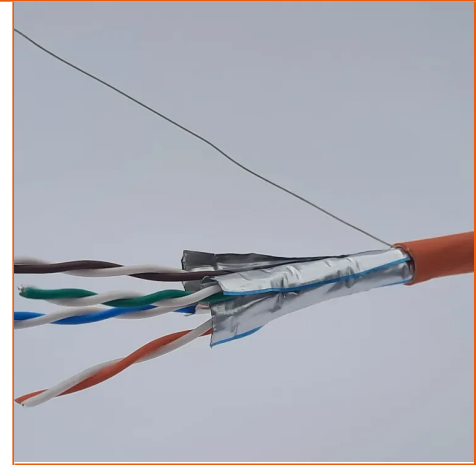

STANDARDS

IEC 61156-5
ISO/IEC 11801
ANSI/TIA-568-C.2
EN 50288
EN 50173-1
IEEE 802.3bt (PoE++)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

and American cable standards.

When used in combination with LANmark-6A connectors and patch cords, the system supports the 10GBase-T applications as defined in IEEE 802.3an and meets or exceeds the link and channel requirements for Category 6A and Class EA as defined in TIA/EIA 568-C.2 and ISO/IEC 11801.

Installation

LANmark-6A FFTP cables offer the same ease of installation as their F/UTP equivalents, enabling removal of the aluminium foil in one go, whilst no central cross nor individual pair foils need to be removed.

To support the correct set-up of hand held analysers for installation testing, the actual cable NVP value is given in the cable's print legend.

Guarantees

Traceability codes on both cable and packaging ensure quality validation of the installed cable.

Installations with LANmark-6A cable and connectivity are qualified for a 25 year full system warranty, which includes Parts, Channel Performance, Application Support and Labour, as described in the Aginode Certified System Warranty.

LANmark-6A FFTP AWG23 Cat 6A LSZH Dca s2 d1 a1 Orange

500m reel

Characteristics

Construction characteristics

Colour	Orange
Outer sheath	LSZH
Type of cable	F/FTP

Dimensional characteristics

Approximate weight	53 kg/km
Conductor cross-section (AWG/KCMIL)	23
Diameter over insulation	1.32 mm
Nominal outer diameter	7.3 mm

Electrical characteristics

Mutual capacitance	45 nF/km
Characteristic impedance	100 Ohm
Max. transfer impedance at 30 MHz (Ohm/km)	120 Ohm/km
Max. DC resistance of the conductor at 20°C	80 Ohm/km

Mechanical characteristics

Maximum operating pulling force	100 N
---------------------------------	-------

Transmission characteristics

Skew	30 ns/100m
Nominal Velocity of Propagation (NVP)	82 %
Coupling attenuation at 30 MHz	>75 dB
Propagation delay, max. 100 MHz	536 ns/100m

Usage characteristics

Range	LANmark-6A
Gases corrosivity	IEC 60754-1; IEC 60754-2
Length	500 m
Operating temperature, range	-20...60 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Category	Cat. 6A
Flame retardant	IEC 60332-1
Smoke density	IEC 61034
Packaging	Reel
Ambient installation temperature, range	-10...60 °C
Minimum Bend Radius - During Installation (under Tension)	58 mm
Minimum Bend Radius - Installed	29 mm

Documentation

[Electrical performance LANmark-6A FFTP cable.pdf pdf — 71.71 KB](#) Download 