


Copyright 2018 -

RoHS Compliant

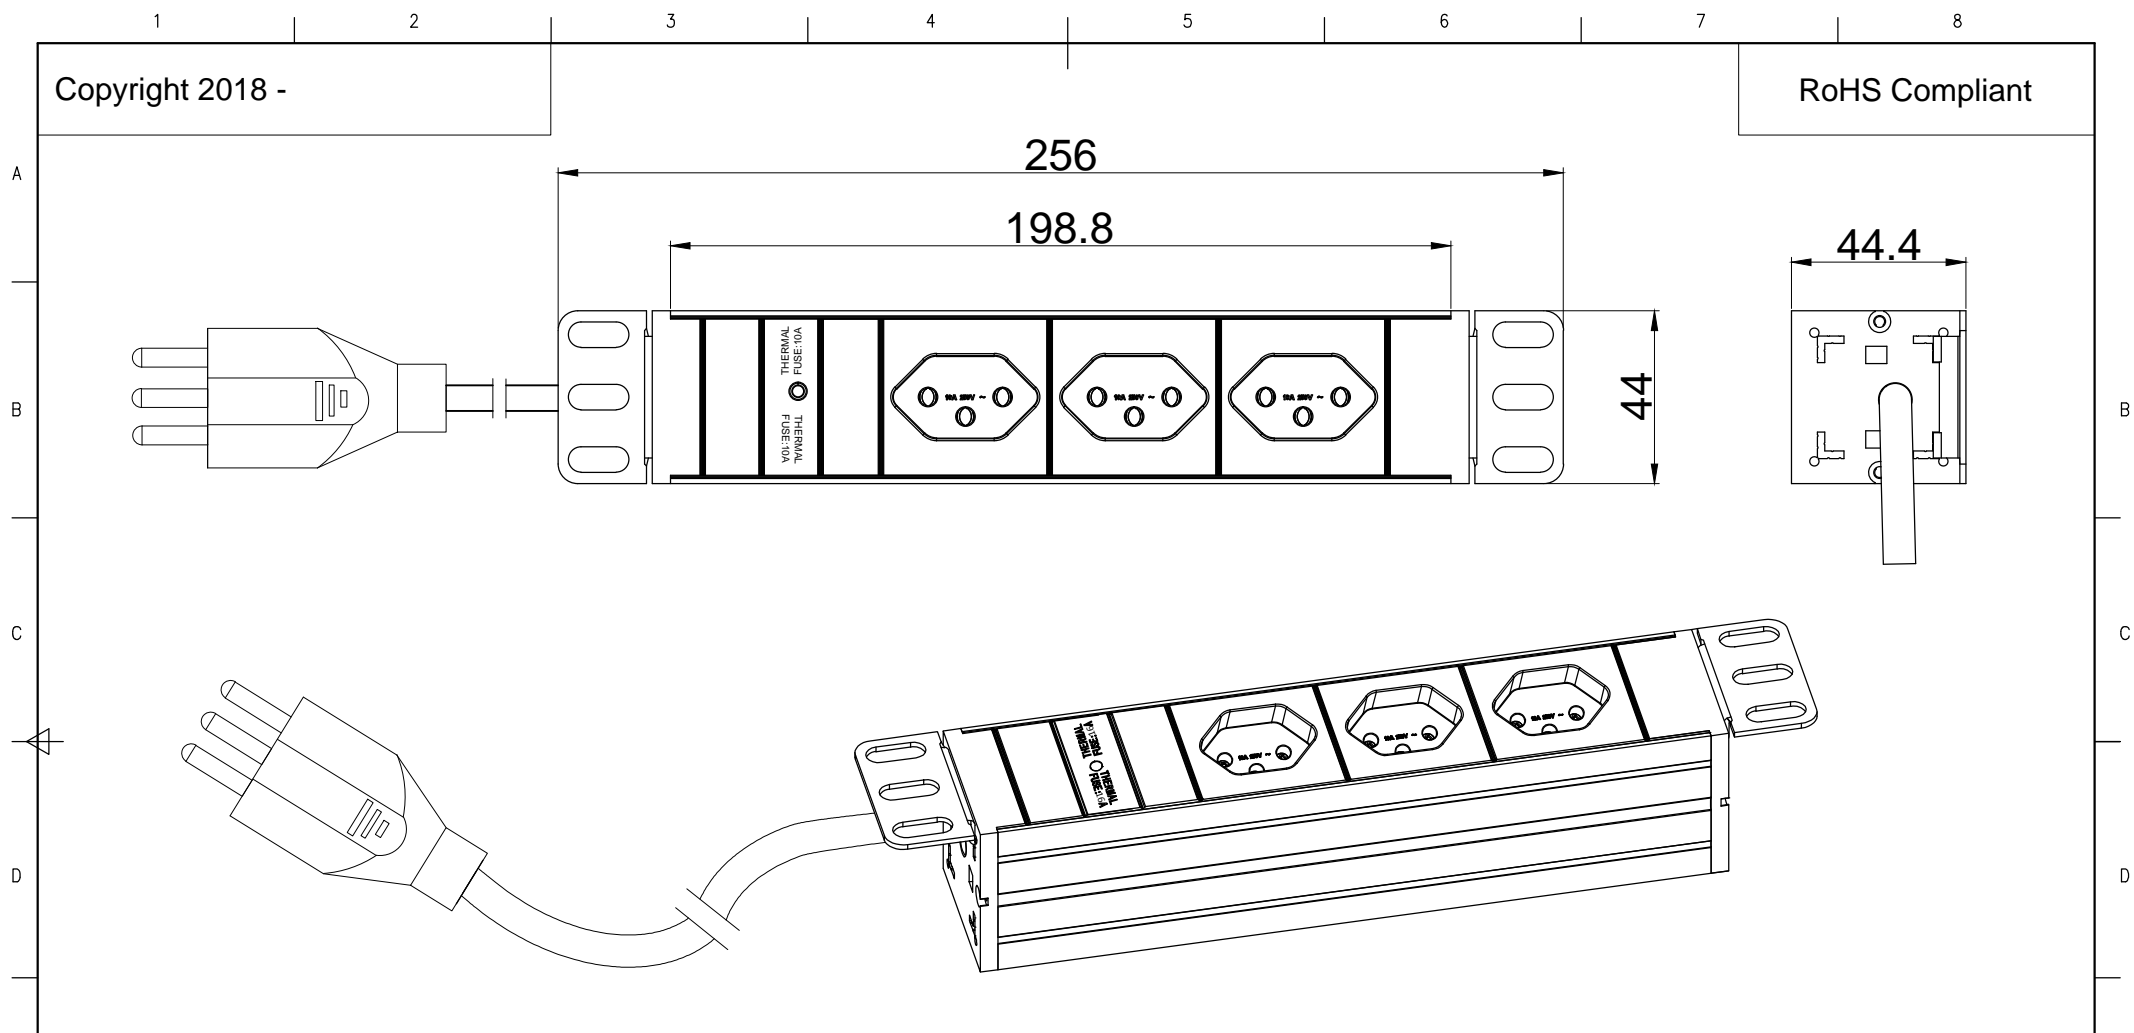

<b>Basic Series</b>	<b>OUTPUT</b>	<b>OPERATING TEMPERATURE</b>
All Plastic In Black	(3) type 13 (10A Rated) In Black	0° to 60°C
<b>INPUT</b>	<b>BRANCH CIRCUITS</b>	<b>MOUNTING ACCESORIES</b>
250VAC 10A 50HZ T12 plug 3M H05VV-F3G1.0mm Power lead	(1) Sang mao Thermal Fuse 10A	(2) 42 Bracket

Revisions		
Rev	Description	Date

DRAWING TYPE  (NO PERMISSION, NO CHANGING)		<b>S-21 B2 226-P</b>	
unit=mm		Housing	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Silver Oxidation
FILLET	R0.5	DATE 25-10-2018	
ANGLE	±0.5°		
FIRST ANGLE			
SCALE 1:3		DATE 25-10-2018	