

DIGITUS®

HDMI REPEATER



Manual **DS-55901**

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 INTRODUCTION

This is a kind of upgrade HDMI Repeater. It extends the length of HDMI cable up to 35M by regenerating the HDMI signal before it sends the outputs to the HDMI monitor or projector. Meanwhile, according to the length of HDMI cable the special designed EQ can be adjusted to reach the best transmission function. This HDMI Repeater adopts the iron shell for better EMI elimination and it will clean out the digital noise (sparkles) in your picture. With the unique designed structure, this repeater can be fixed up with the donated nogs in "L" shape.

This repeater compatible well for HD-DVD,SKY-STB, PS3, Xbox36etc. It offers solutions for residential consumers: HDTV retail and show site, HDTV, STUB, DVD and Projector factories, noise, space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.

1.1 FEATURES

This kind of the HDMI Repeater has many features that enable it to perform in a superior manner. Among those features you will find:

- Support HDMI HighSpeed (1.3b)
- Support highest video resolution 1080p.
- Support 225MHz/2.25Gbps per channel (6.75Gbps all channel) bandwidth.
- Support 12bit per channel (36bit all channel) deep color.
- HDCP pass-through.
- Iron Shell for better EMI elimination.
- Support uncompressed audio such as LPCM.
- Support compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD) .
- 8 levels of equalization settable by turning EQ from 0 to 7, so that support different length of HDMI cable between 1m to 35m.
- Unique designed structure for better connection.
- Support 3D all format, including 1080p@23.98/24Hz, 720p@59.94/60Hz/50Hz.

2.0 SPECIFICATIONS

Signal Inputs/Output	
Input Video Signal	5 Volts p-p (TTL)
Maximum Single Link Range	1920x1080P
Output Video	HDMI HighSpeed (1.3b)
HDMI Input/Output Connector	Type A 19 pin
Operating Frequency	
Vertical Frequency Range	50/60Hz
Video Amplifier Bandwidth	2.25Gbps/225MHz
Resolutions(HDTV)	
Interlaced(50&60Hz)	480i,576i,1080i
Progressive(50&60Hz)	480p,576p,720p,1080p
Mechanical	
Size(H-W-D)	5X4X3.5MM
Weight(Net)	78g
Environmental	
Operating Temperature	0 °C to +70°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C

Storage Humidity	5% to 90 % RH (no condensation)
Power Requirement	
External Power Supply	5V DC@2A(optional)
Power consumption (Max)	3W
Regulatory Approvals	
Converter Unit	FCC,CE,UL
Power Supply	UL,CE,FCC
Accessories Adapter	
AC Power Adapter	1
User Manual	English, German


Note: Specifications are subject to change without notice.

3.0 Package Contents

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- HDMI Repeater
- Two “L” shape nooks
- One nut
- User's Manual

4.0 PANEL DESCRIPTIONS

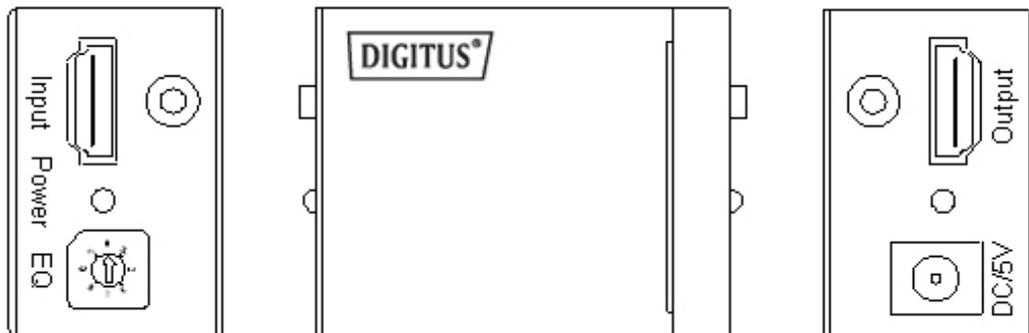


5.0 CONNECTION AND OPERATION

- 1) Connect the output of the source device into the input of HDMI Repeater and connect the output to the HDMI display unit. The HDMI Repeater is put close to the HDMI display unit (Input cables are optional)
*Please refer to connection diagram section.

- 2) Adjusting EQ from 0 to 7, according to the different length of HDMI cable.
- 3) Insert the DC side of 5v power supply if the 5v of the source is not enough .

Attention: Insert / Extract cable gently.

5.1 CONNECTION DIAGRAM

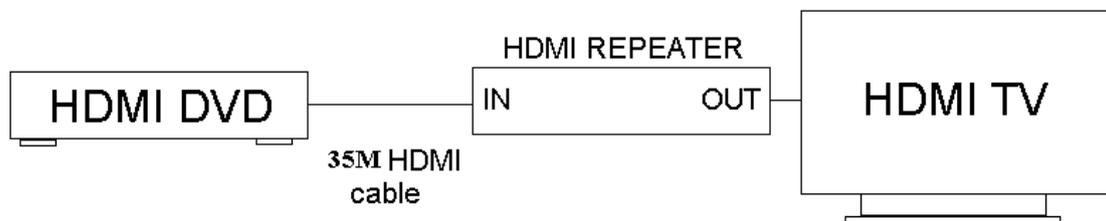

Hereby ASSMANN Electronic GmbH, declares that this device is in compliance with the requirements of Directive 2014/30/EU and the Directive 2011/65/EU for RoHS compliance. The complete declaration of conformity can be requested by post under the below mentioned manufacturer address.

Warning:

This device is a class B product. This equipment may cause some radio interference in living environment. In this case, the user can be requested to undertake appropriate measures to prevent interference.

www.assmann.com
Assmann Electronic GmbH
Auf dem Schüffel 3
58513 Lüdenscheid
Germany

